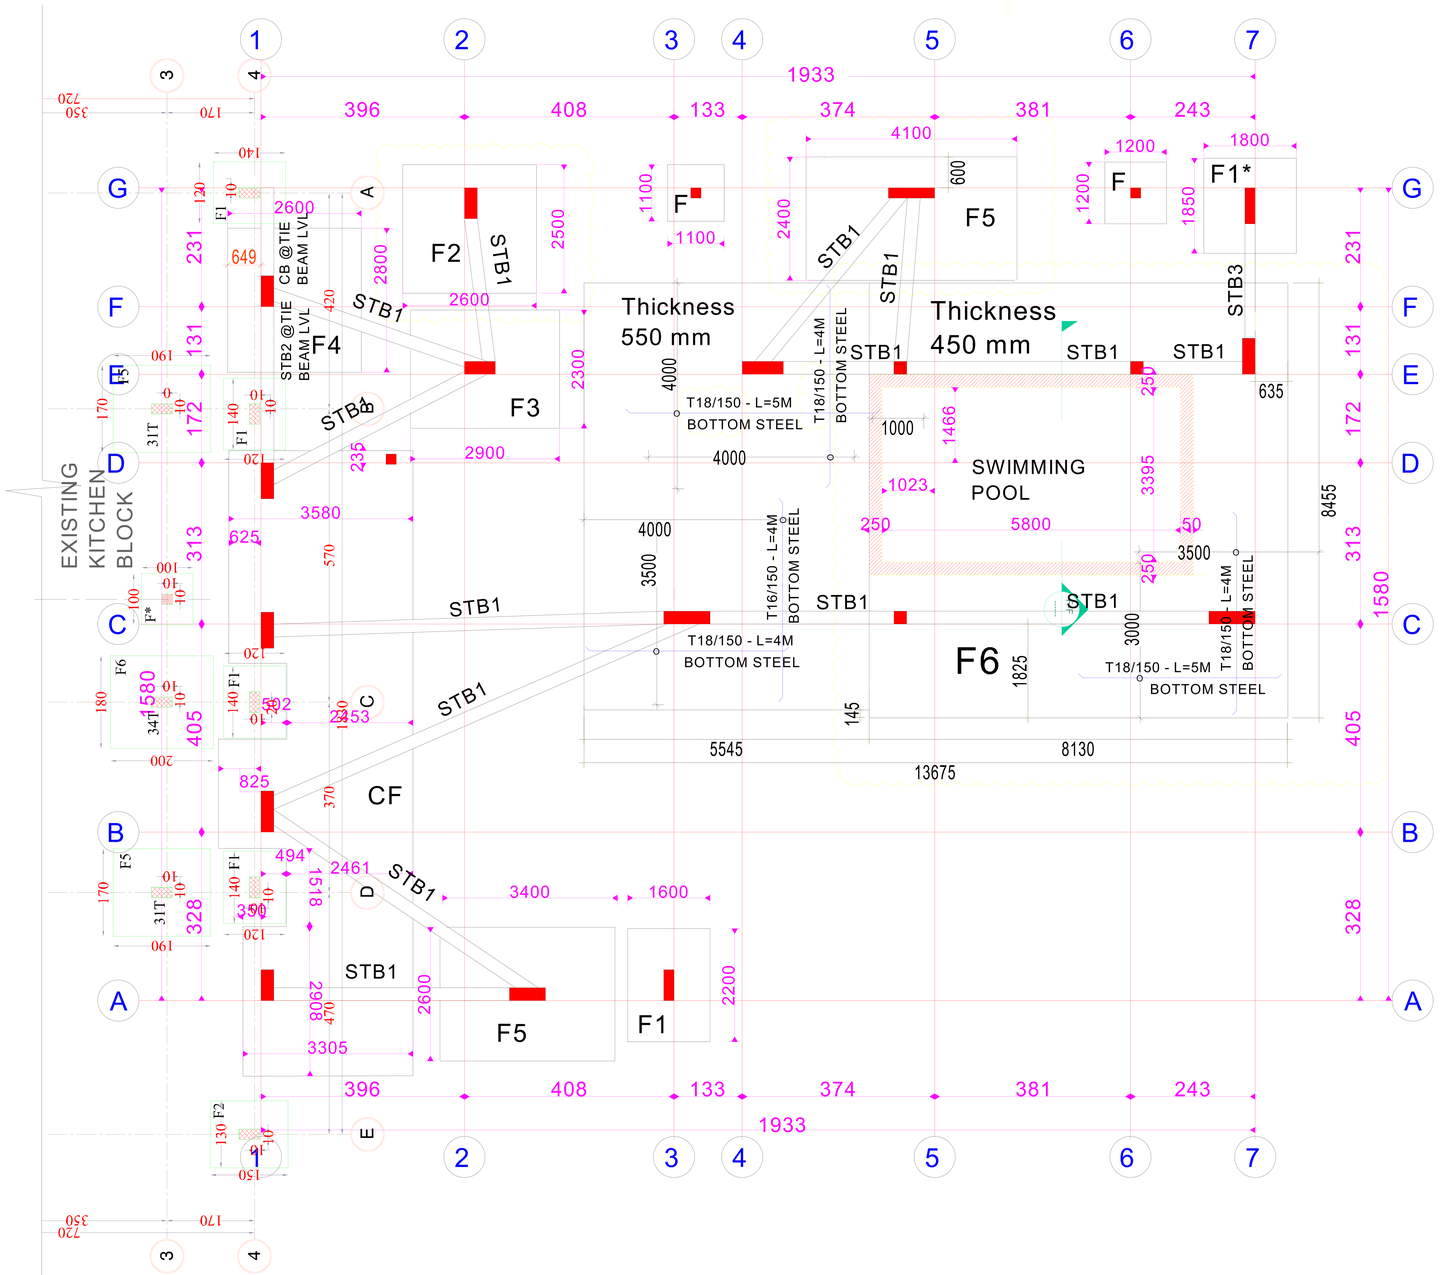

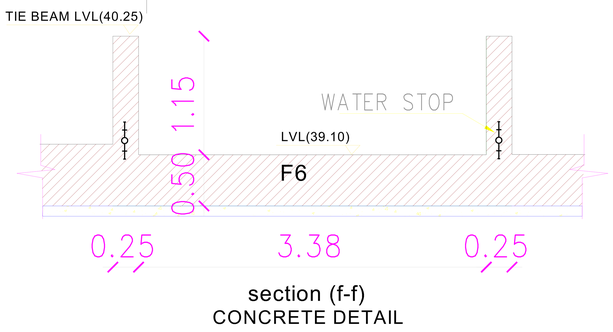

section (f-f)
CONCRETE DETAIL

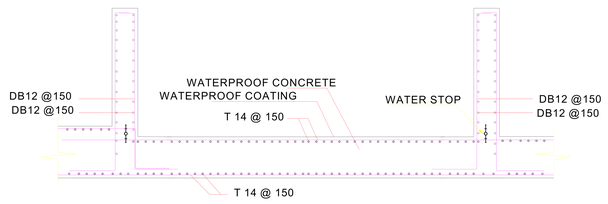

section (f-f)
STEEL DETAIL

FONDATION LAYOUT

Govvernment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

10 March 2025

Building Permit #: PRMT-24-0003939

Appoved By:

STRUCTURAL NOTES	CONCRETE COVERS :
ACI 318-11	Foundations cover = 75mm
F'C/FCU = 28/35 N/mm2	Columns cover = 40mm
FY = 460N/mm2	Walls cover = 30mm
FYt = 420N/mm2	Beams cover = 40mm
	Slabs & Stairs cover = 25mm

Rooms	Space	Number
Residential		
Commercial		
Industrial		
Goverment		
Resident.-Comm.		
Total		

Savana
Engineering Consultancy & Interior design

Client	SAEED AHMED MOHAMMED HASAN ALMANSOORI		
Project	DOUBLE STORY VILAA		
Drg.Title	FOUNDATION LAYOUT		
Area	ARIFAA	Floortype	
Case ID.	2808064	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	607011962
Bldg. No.	BLD-24-03157	Floor No.	
Date	MARCH-2025	Sht. No.	S02
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

TYPE	SIZE			REINFORCEMENT DETAILS				REMARKS.
	WIDTH (mm)	LENGTH (mm)	DEPTH (mm)	BOTTOM MESH		TOP MESH		
				SHORT BAR	LONG BAR	SHORT BAR	LONG BAR	
F	1200	1200	400	T12-150	T12-150	4T12	4T12	
F*	1000	1400	400	T14-125	T14-125	4T12	4T12	
F1	1600	2200	400	T14-150	T14-150	4T12	4T12	
F1*	1800	1850	400	T14-150	T14-150	4T12	4T12	
F2	2500	2600	400	T16-150	T16-150	4T12	4T12	
F3	2300	2900	450	T14-150	T14-150	4T12	4T12	
F4	2600	2800	400	T14-150	T14-150	4T14	4T14	
F5	2400	4100	450	T16-125	T16-125	4T12	4T12	
F6	AS PER LAYOUT		450&550	T14-150	T14-150	T14-150	T14-150	SWIMMING POOL FOOTING
CF	AS PER LAYOUT	12150	400	T12-125	T12-125	T12-125	T12-125	

SCHEDULE OF STB

TYPE	BEAM SIZE	BOTTOM REINFORCEMENT		TOP REINFORCEMENT			SIDE BARS O.E.F (F) EACH SIDE	STIRRUPS				NO OF LEGS	REMARKS
	MM X MM	STRAIGHT (A)	EXTRA @ MID SPAN(B)	STRAIGHT (C)	EXTRA @ CONT. SUPPORT (D)	EXTRA @ DISCONT. SUPPORT (E)		AT SUPPORT		AT MIDSPAN			
								OUTER (G1)	INNER (G2)	OUTER (H1)	INNER (H2)		
STB1	250 x1300	4T20	--------	3T20+3T20	--------	--------	--------	T10-100	--------	T10-150	--------	2	
STB2	250 x1200	3T18	--------	2T18+2T18	--------	--------	--------	T10-100	--------	T10-150	--------	2	AT TIE BEAM LEVEL
STB3	200 x1300	2T18+2T18	--------	3T18+3T18	--------	--------	--------	T10-100	--------	T10-150	--------	2	

SCHEDUEL FONDATION

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

10 March 2025

Building Permit #: PRMT-24-0003939

Appoved By:

Savana
Engineering Consultancy & interior design

Client	SAEED AHMED MOHAMMED HASAN ALMANSOORI		
Project	DOUBLE STORY VILAA		
Drg.Title	FOUNDATION SCHEDULE		
Area	ARIFAA	Floortype	
Case ID.	2808064	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	607011962
Bldg. No.	BLD-24-03157	Floor No.	
Date	MARCH-2025	Sht. No.	S03
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

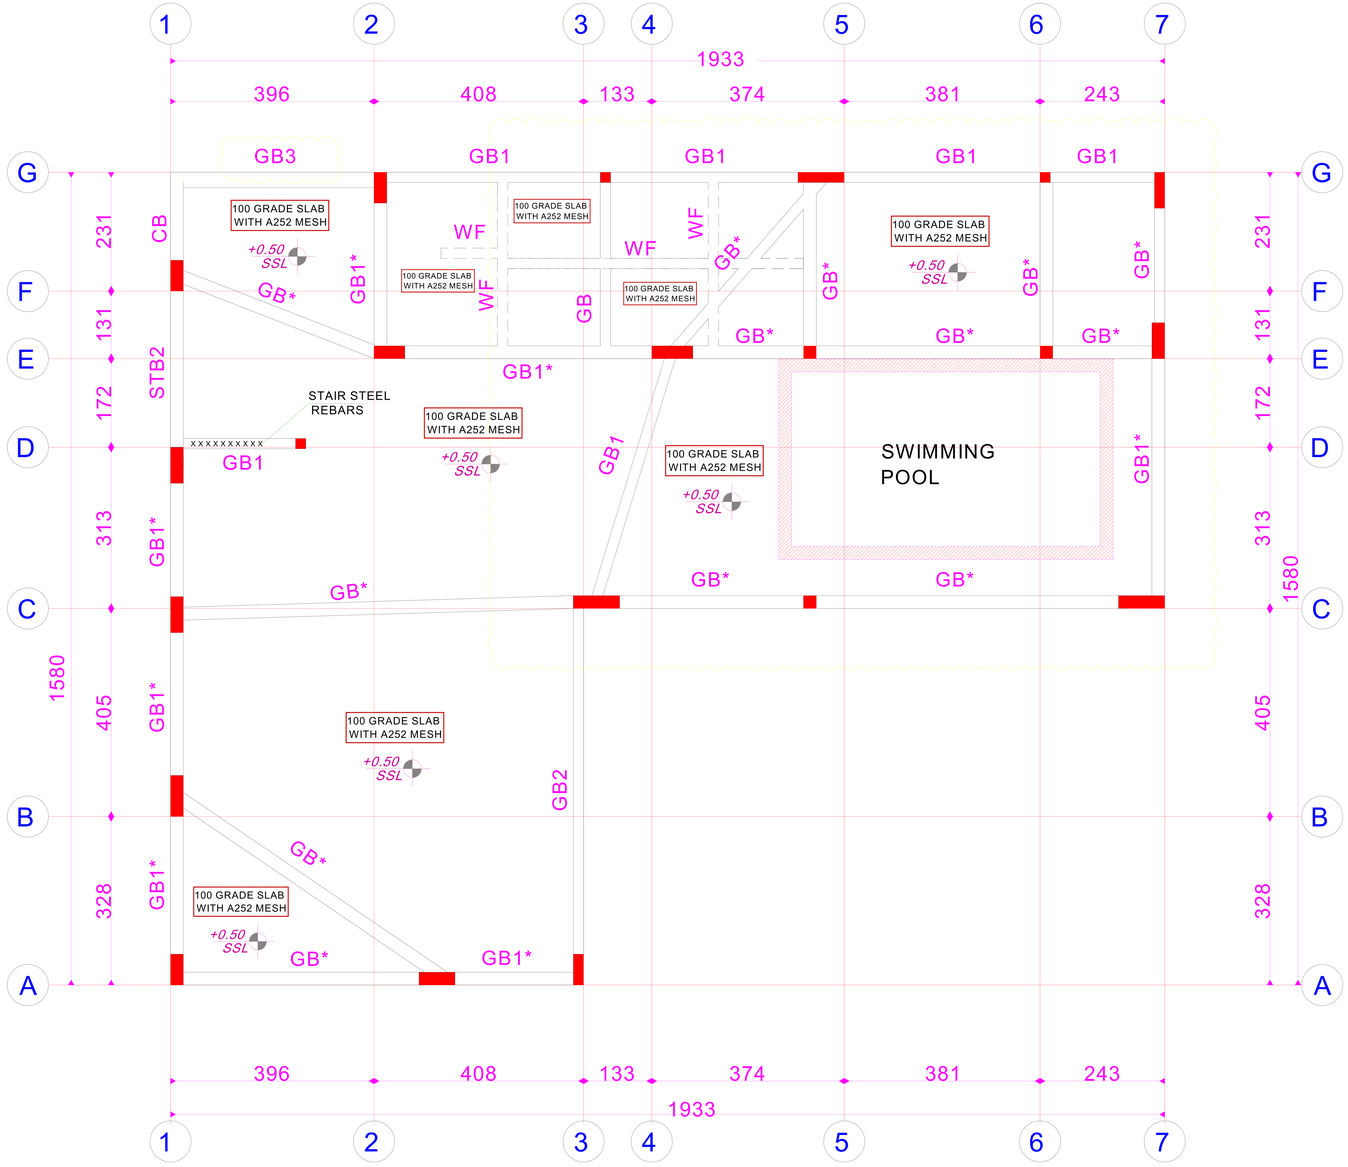

BEAM SIZE		TOP REINFORCEMENT			BOTTOM REINFORCEMENT		STIRRUPS				SIDE BARS O.E.F (F)		
TYPE	MM XMM	STRAIGHT (C)	EXTRA @ CONT. SUPPORT (D)	EXTRA @ DISCONT. SUPPORT (E)	STRAIGHT (A)	EXTRA @ MID SPAN(B)	AT SUPPORT OUTER (G1)	AT SUPPORT INNER (G2)	AT MIDSPAN OUTER (H1)	AT MIDSPAN INNER (H2)	NO OF LEGS	EACH SIDE	REMARKS
GB*	250 X 350	2T16	----	----	2T16	----	T8-150	------	T8-200	------	2	1T12	ABOVE STB
GB	200 X 500	2T16	----	----	2T16	----	T8-150	------	T8-200	------	2	1T12	
GB1	200 X 600	2T16	1T16	1T16	2T16	2T14	T8-150	------	T8-200	------	2	1T12	
GB1*	250 X 600	2T16	1T16	1T16	3T16	2T14	T8-150	------	T8-200	------	2	1T12	
GB2	200 X 700	2T16	2T14	2T14	3T16	2T14	T10-150	------	T10-200	------	2	2T12	
GB2*	250 X 700	2T16	2T14	2T14	3T16	2T14	T10-150	------	T10-200	------	2	2T12	
GB3	300 X 600	2T16	2T14	2T14	3T16	2T14	T10-150	------	T10-200	------	2	2T12	

SCHEDULE OF GROUND BEAMS

BEAM SIZE		TOP REINFORCEMENT			BOTTOM REINFORCEMENT		STIRRUPS				SIDE BARS O.E.F (F)		
TYPE	MM X MM	STRAIGHT (C)	EXTRA @ CONT. SUPPORT (D)	EXTRA @ DISCONT. SUPPORT (E)	STRAIGHT (A)	EXTRA @ MID SPAN(B)	AT SUPPORT OUTER (G1)	AT SUPPORT INNER (G2)	AT MIDSPAN OUTER (H1)	AT MIDSPAN INNER (H2)	NO OF LEGS	EACH SIDE	REMARKS
STB2	250 x1200	2T18+2T18	--------	--------	3T18	--------	T10-100	--------	T10-150	--------	2	4T12	AT TIE BEAM LEVEL
CB	250 x1200	3T18+3T18	--------	--------	3T18	--------	T10-100	--------	T10-150	--------	2	4T12	AT TIE BEAM LEVEL

SCHEDULE OF STB

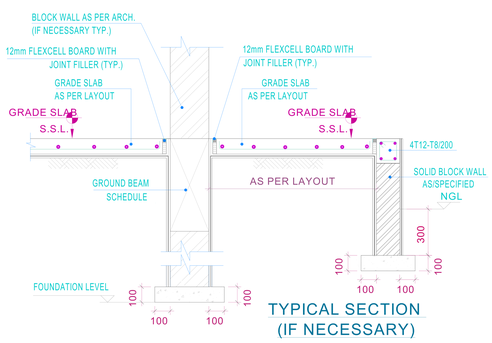

TYPICAL SECTION (IF NECESSARY)

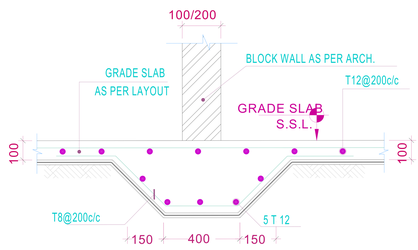

TYPICAL DETAILS FOR (W.F.)
FOOTING FOR 10cm/20cm LOAD BEARING WALLS.

TYPICAL DETAILS

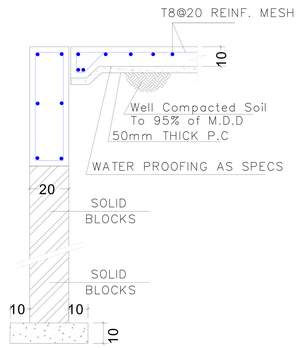

TYPICAL EXTERNAL GROUND BEAM
SC. (1/25)

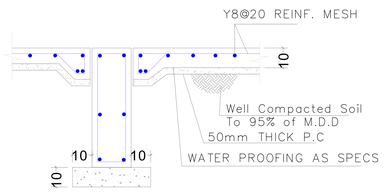

TYPICAL INTERNAL GROUND BEAM
SC. (1/25)

TIE BEAM LAYOUT

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

10 March 2025

Building Permit #: PRMT-24-0003939

Appoved By:

STRUCTURAL NOTES

ACI 318-11
F'C/FCU = 28/35 N/mm2
FY = 460N/mm2
FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm
Columns cover = 40mm
Walls cover = 30mm
Beams cover = 40mm
Slabs & Stairs cover = 25mm

LEGEND:

1) COLUMN / WALL TO BE CONTINUED
2) COLUMN / WALL TO BE TERMINATED

Savana
Engineering Consultancy & interior design

Client	SAEED AHMED MOHAMMED HASAN ALMANSOORI		
Project	DOUBLE STORY VILAA		
Drg.Title	TIE BEAM LAYOUT		
Area	ARIFAA	Floortype	
Case ID.	2808064	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	607011962
Bldg. No.	BLD-24-03157	Floor No.	
Date	MARCH-2025	Sht. No.	S04
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM