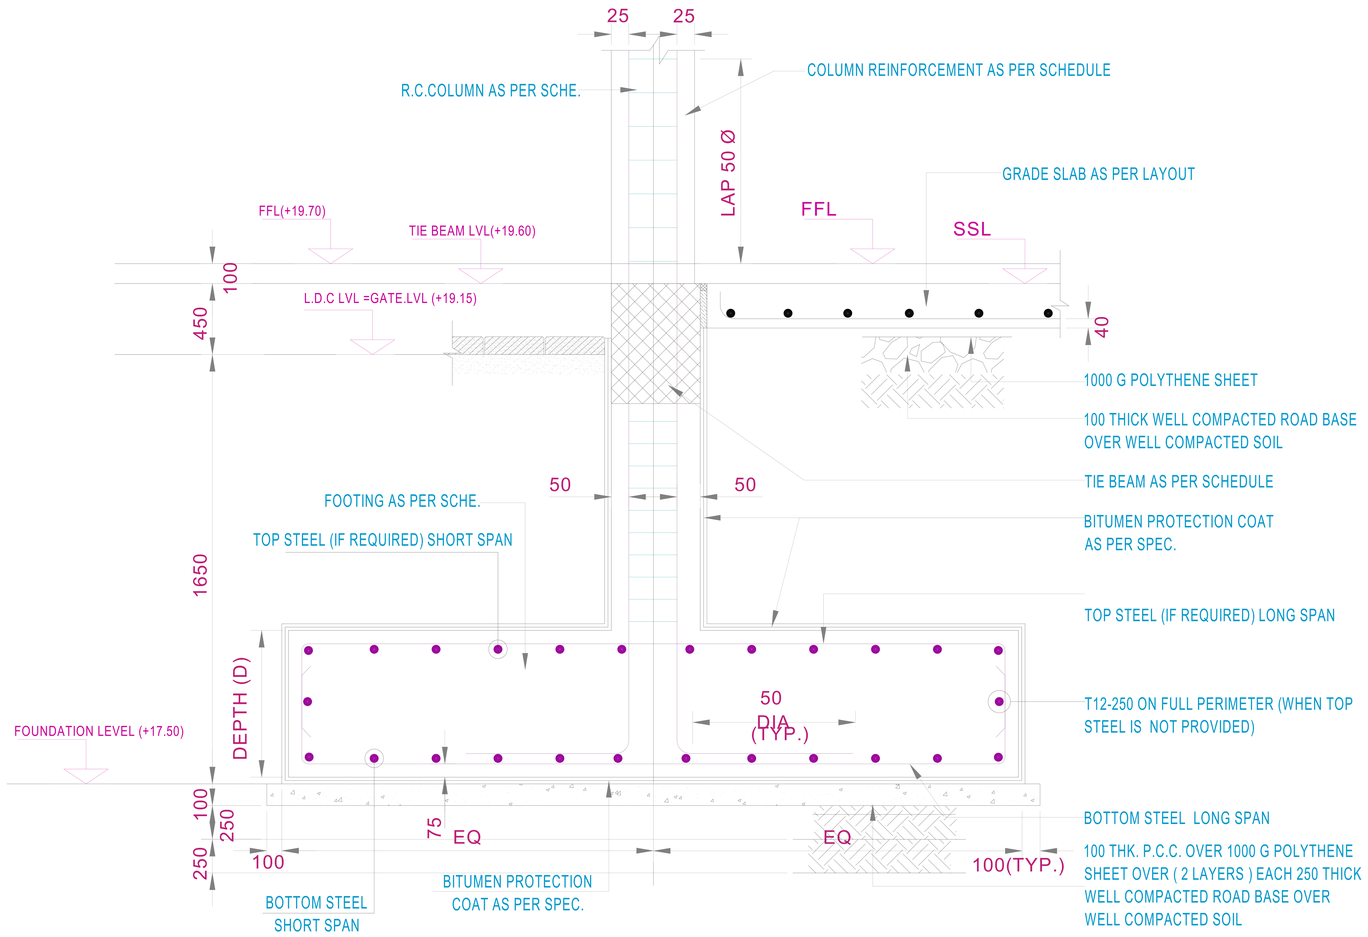

(TYPICAL SECTION FOR FOOTING)

ALLOWABLE BEARING CAPACITY FOR ISOLATED/ STRIP FOOTINGS

Width of Footing	Allowable Bearing Pressure	Modulus of sub-grade
Up to 2.00m	140 kN/m2	16,800 kN/m3
Up to 3.00m	130 kN/m2	15,600 kN/m3
Up to 4.00m	120 kN/m2	14,400 kN/m3

- Excavate and level the existing soil at the Level of -2.25m below the D.LVL (19.15) level established on the site .
- Compact using heavy rollers, the soil at the bottom of the excavation at level of -(2.25m) from the D.LVL (19.15) level established on the site to at least 95% of its maximum dry density at its optimum moisture content obtained from Modified Proctor Compaction Test.
- Place Two (2) layers of selected granular backfill materials (Road Base) 25cm thick each to reach the required foundation level. Each layer shall be compacted by heavy vibratory roller to a degree of compaction not less than 95% of the maximum dry density as obtained by modified proctor compaction test (BS 1377:1990; PART 4).
- A 100 mm thick layer of blinding concrete (PCC) should be placed to protect the final compacted surface.
- Shallow foundation can be placed on engineered fill. (i.e., Approximately -1.65m D.LVL established on the site.)

DETAILS FONDATION

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

STRUCTURAL NOTES

ACI 318-11
F'C/FCU = 28/35 N/mm2
FY = 460N/mm2
FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm
Columns cover = 40mm
Walls cover = 30mm
Beams cover = 40mm
Slabs & Stairs cover = 25mm

Rooms	Space	Number
Residential		
Commercial		
Industrial		
Goverment		
Resident.-Comm.		
Total		

Savana
Engineering Consultancy & Interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	DETAILS FOUNDATION		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S13
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

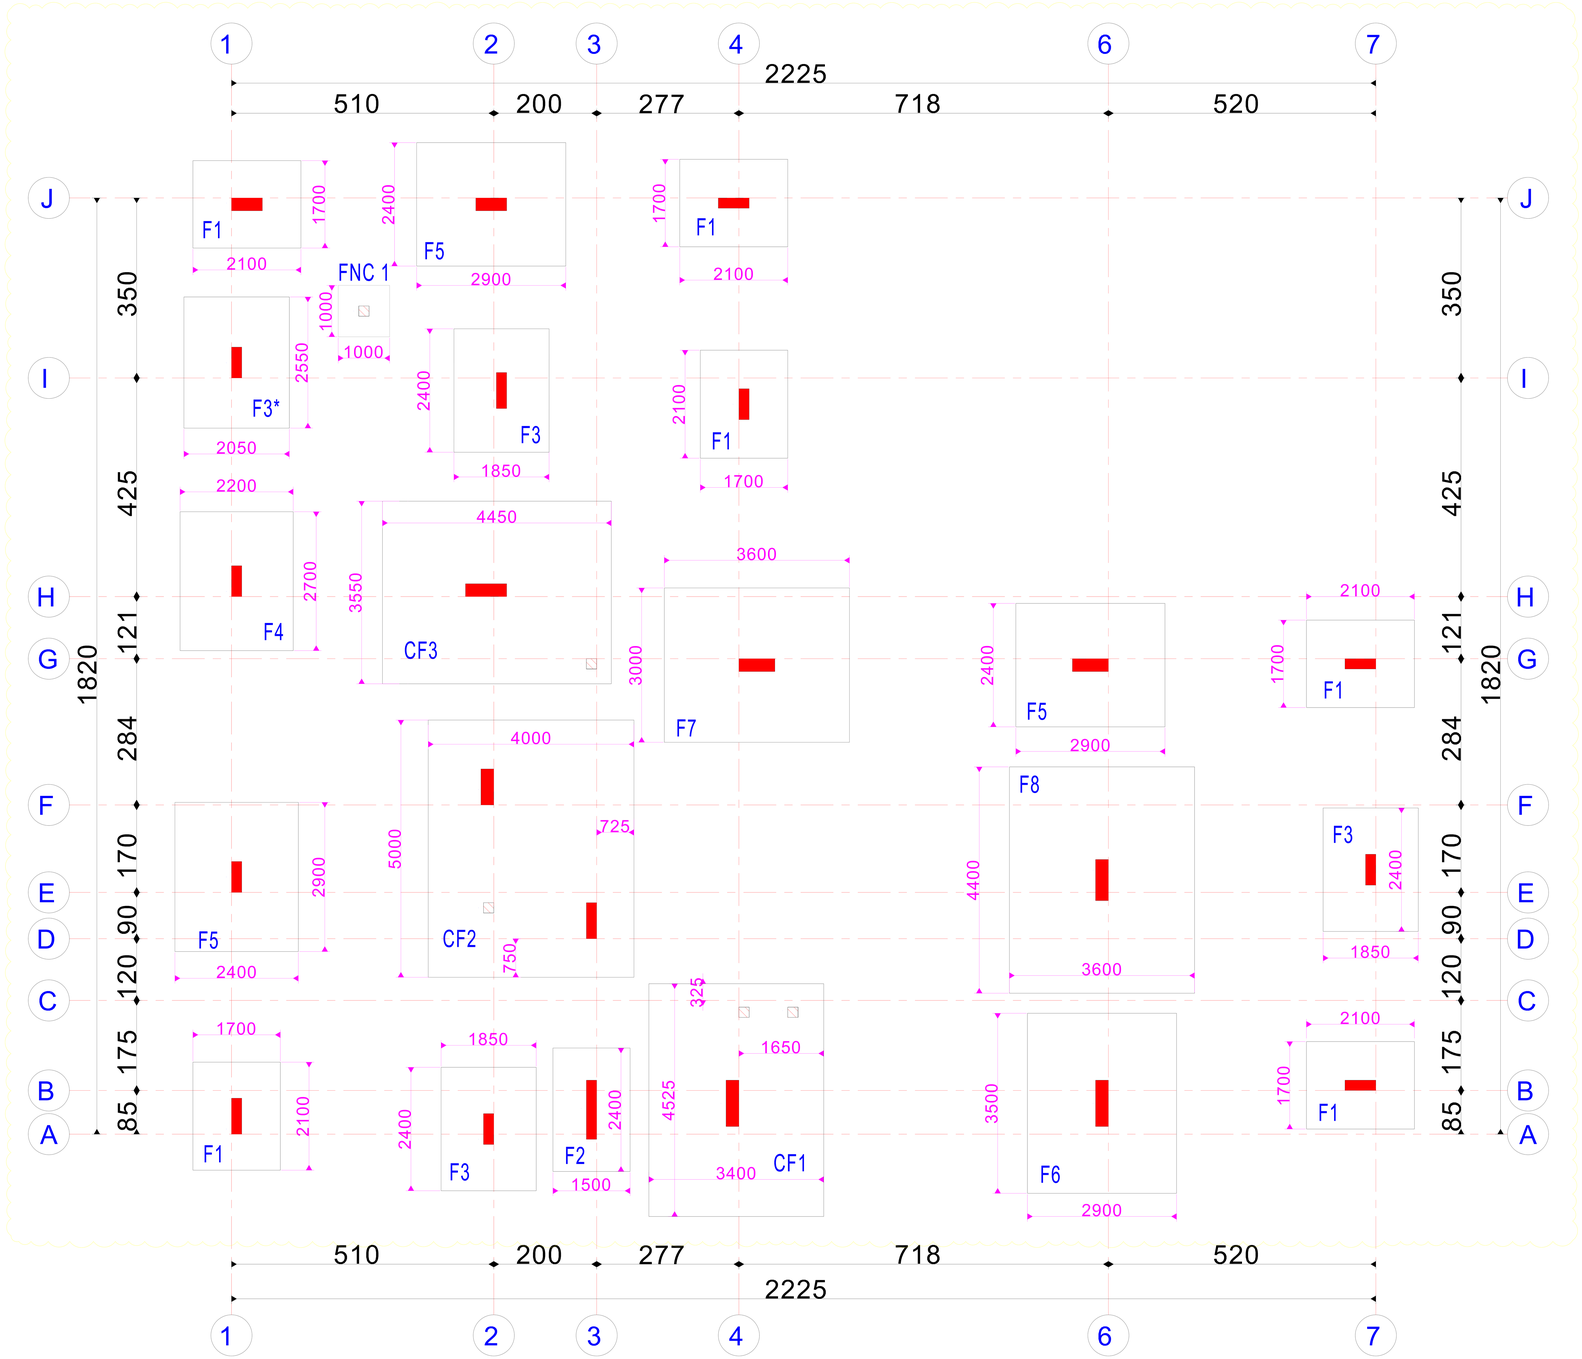

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

LEGEND:

- COLUMN / WALL TO BE CONTINUED
- COLUMN / WALL TO BE TERMINATED

STRUCTURAL NOTES

ACI 318-11
F'C/FCU = 28/35 N/mm2
FY = 460N/mm2
FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm
Columns cover = 40mm
Walls cover = 30mm
Beams cover = 40mm
Slabs & Stairs cover = 25mm

Rooms	Space	Number
Residential		
Commercial		
Industrial		
Goverment		
Resident.-Comm.		
Total		

Savana
Engineering Consultancy & Interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	FOUNDATION LAYOUT		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S02
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

FONDATION LAYOUT

TYPE	SIZE			REINFORCEMENT DETAILS				REMARKS.
	WIDTH (mm)	LENGTH (mm)	DEPTH (mm)	BOTTOM MESH		TOP MESH		
				SHORT BAR	LONG BAR	SHORT BAR	LONG BAR	
FNC 1	1000	1000	400	T12-150	T12-150	4T12	4T12	
F1	1700	2100	400	T12-150	T12-150	4T12	4T12	
F2	1500	2400	400	T12-150	T12-150	4T12	4T12	
F3	1850	2400	400	T12-150	T12-150	4T12	4T12	
F3*	2050	2550	400	T12-150	T12-150	4T12	4T12	
F4	2200	2700	450	T12-125	T12-125	4T12	4T12	
F5	2400	2900	450	T14-150	T14-150	4T14	4T14	
F6	2900	3500	500	T14-150	T14-150	4T14	4T14	
F7	3000	3600	500	T14-150	T14-150	4T14	4T14	
F8	3600	4400	550	T16-150	T16-150	4T16	4T16	
CF1	3400	4525	550	T16-150	T16-150	T16-150	T16-150	
CF2	4000	5000	450	T14-150	T14-150	T14-150	T14-150	
CF3	3550	4450	500	T14-125	T14-125	T14-125	T14-125	

SCHEDUEL FONDATION

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	FOUNDATION SCHEDULE		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S03
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

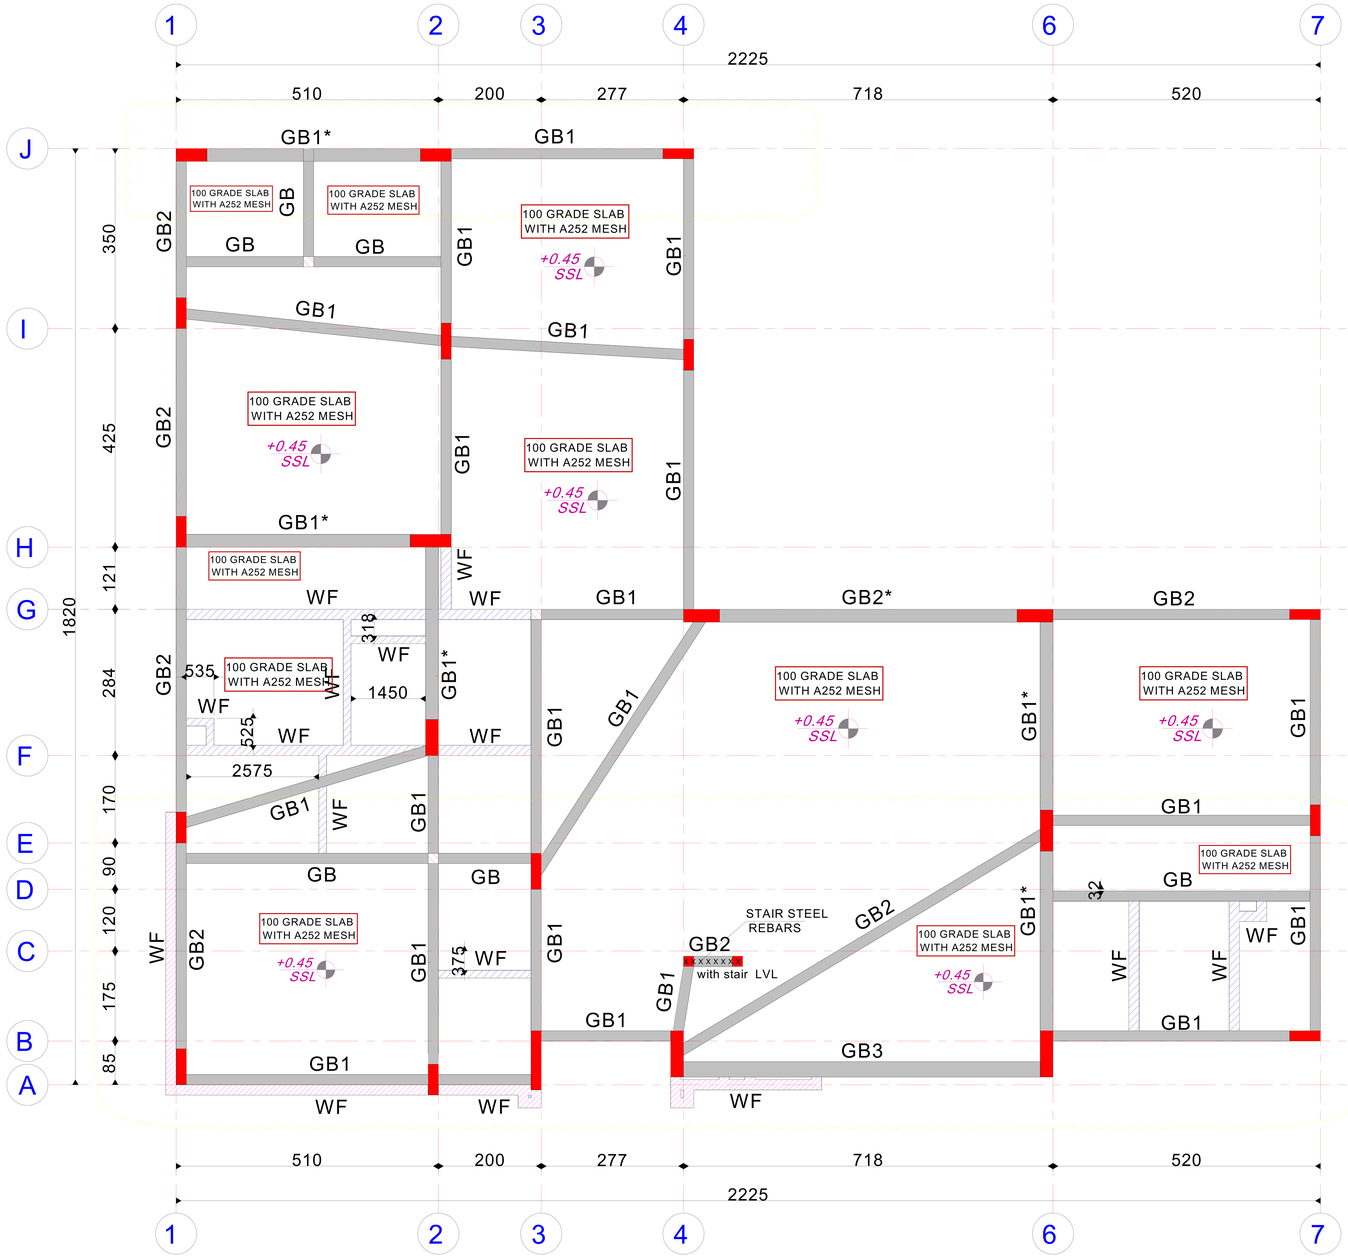

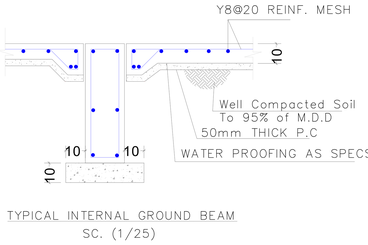

TYPICAL INTERNAL GROUND BEAM
SC. (1/25)

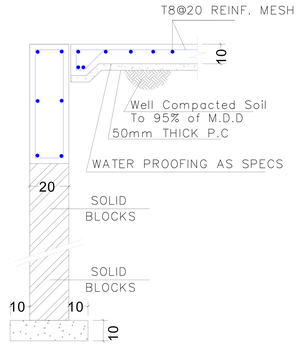

TYPICAL EXTERNAL GROUND BEAM
SC. (1/25)

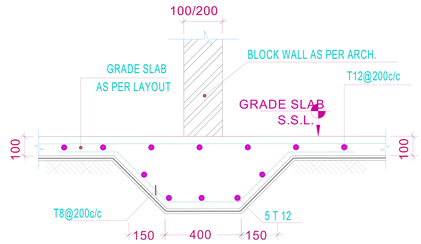

TYPICAL DETAILS FOR (W.F.)
FOOTING FOR 10cm/20cm LOAD BEARING WALLS.

TYPICAL DETAILS

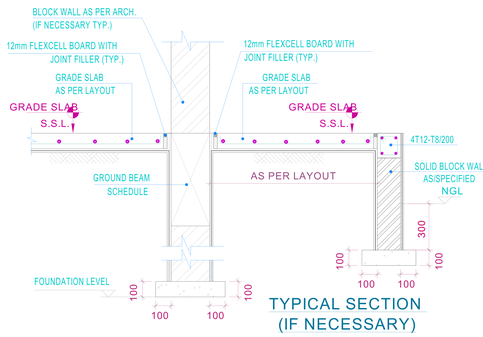

TYPICAL SECTION
(IF NECESSARY)

SCHEDULE OF GROUND BEAMS	TYPE	BEAM SIZE	BOTTOM REINFORCEMENT		TOP REINFORCEMENT			SIDE BARS O.E.F (F)	STIRRUPS				NO OF LEGS	REMARKS
									AT SUPPORT		AT MIDSPAN			
		MM XMM	STRAIGHT (A)	EXTRA @ MID SPAN(B)	STRAIGHT (C)	EXTRA @ CONT. SUPPORT (D)	EXTRA @ DISCONT. SUPPORT (E)	EACH SIDE	OUTER (G1)	INNER (G2)	OUTER (H1)	INNER (H2)		
	GB	200 X 500	2T16	----	2T16	----	----	1T12	T8-150	--------	T8-200	--------	2	
	GB1	200 X 600	2T16	1T16	2T16	1T16	1T16	1T12	T8-150	--------	T8-200	--------	2	
	GB1*	250 X 600	3T16	2T14	3T16	1T16	1T16	1T12	T8-150	--------	T8-200	--------	2	
	GB2	200 X 700	3T16	2T14	3T16	2T14	2T14	2T12	T10-150	--------	T10-200	--------	2	
	GB2*	250 X 700	3T16	2T14	3T16	2T14	2T14	2T12	T10-150	--------	T10-200	--------	2	
	GB3	300 X 700	3T16	3T16	3T16	3T16	3T16	2T12	T10-150	--------	T10-150	--------	2	

TIE BEAM LAYOUT

Govement Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

LEGEND:
- COLUMN / WALL TO BE CONTINUED
- COLUMN / WALL TO BE TERMINATED

STRUCTURAL NOTES
- ACI 318-11
- F'C/FCU = 28/35 N/mm2
- FY = 460N/mm2
- FYt = 420N/mm2

CONCRETE COVERS :
- Foundations cover = 75mm
- Columns cover = 40mm
- Walls cover = 30mm
- Beams cover = 40mm
- Slabs & Stairs cover = 25mm

LEGEND:
1) COLUMN / WALL TO BE CONTINUED
2) COLUMN / WALL TO BE TERMINATED

Savana
Engineering Consultancy & Interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	TIE BEAM LAYOUT		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S04
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

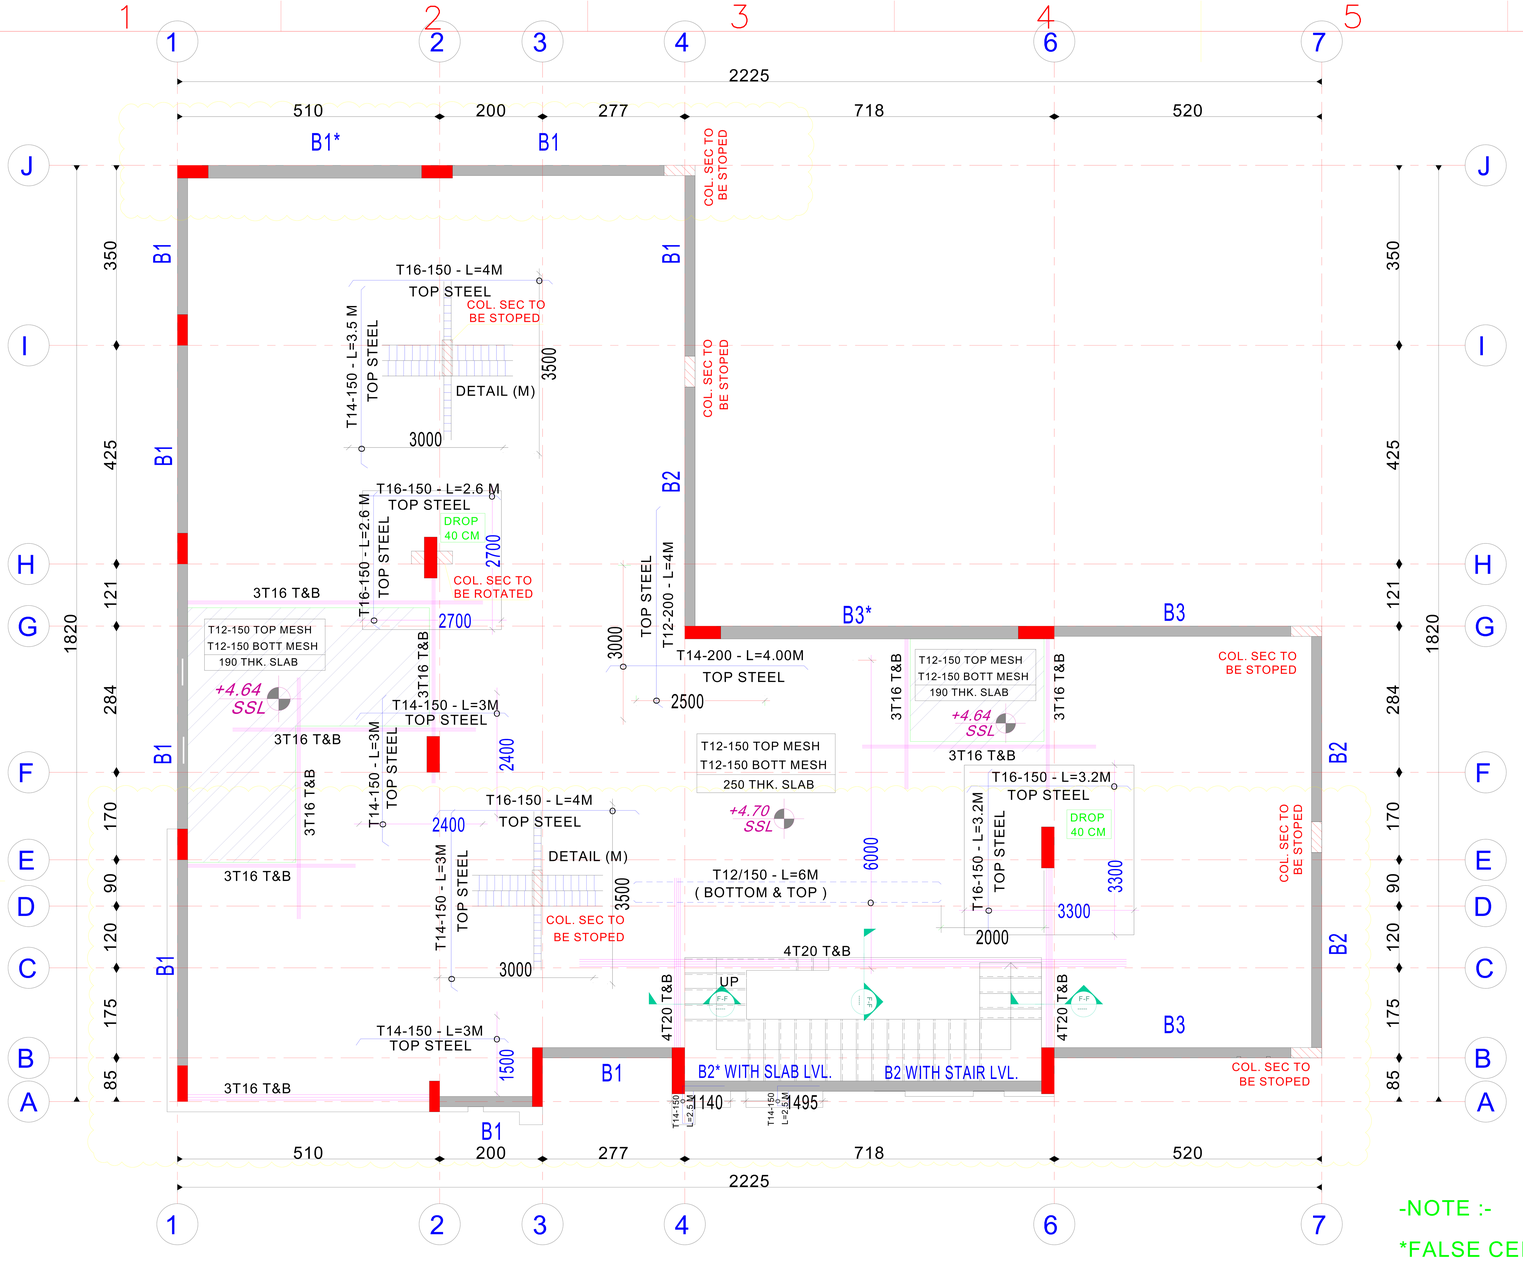

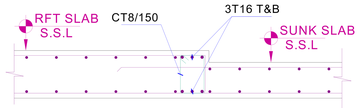

TYPICAL SECTION FOR SUNK SLAB

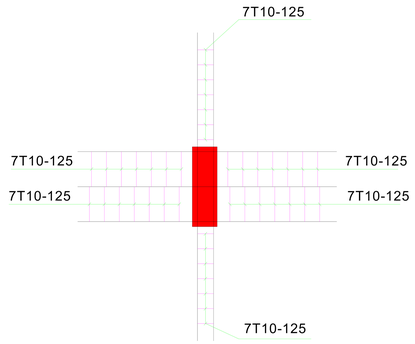

DETAIL (M)

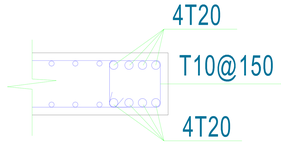

SEC (F-F)

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

LEGEND:

- COLUMN / WALL TO BE CONTINUED
- COLUMN / WALL TO BE TERMINATED

STRUCTURAL NOTES

- ACI 318-11
- F'C/FCU = 28/35 N/mm2
- FY = 460N/mm2
- FYt = 420N/mm2

CONCRETE COVERS :

- Foundations cover = 75mm
- Columns cover = 40mm
- Walls cover = 30mm
- Beams cover = 40mm
- Slabs & Stairs cover = 25mm

-NOTE :-

*FALSE CEILING WILL BE MADE UNDER THE SLAB

SCHEDULE OF FIRST BEAMS

TYPE	BEAM SIZE	BOTTOM REINFORCEMENT		TOP REINFORCEMENT			SIDE BARS O.E.F (F)	STIRRUPS				NO OF LEGS	REMARKS
	MM XMM	STRAIGHT (A)	EXTRA @ MID SPAN(B)	STRAIGHT (C)	EXTRA @ CONT. SUPPORT (D)	EXTRA @ DISCONT. SUPPORT (E)	EACH SIDE	AT SUPPORT		AT MIDSPAN			
								OUTER (G1)	INNER (G2)	OUTER (H1)	INNER (H2)		
B1	200 X 700	2T16	1T16	2T16	1T16	1T16	1T12	T10-150	--------	T10-200	--------	2	
B1*	250 X 700	3T16	2T14	2T16	2T16	2T16	2T12	T10-150	--------	T10-200	--------	2	
B2	200 X 800	3T18	2T16	2T16	2T16	2T16	2T12	T10-150	--------	T10-200	--------	2	
B2*	200 X 800	3T16	2T16	2T16	2T16	2T16	2T14	T10-100	--------	T10-100	--------	2	CLOSED STIRUBS
B3	200 X 900	3T16	2T16	3T16	2T16	2T16	3T12	T10-100	--------	T10-200	--------	2	
B3*	250 X 900	3T16	2T16	3T16	2T16	2T16	3T12	T10-100	--------	T10-200	--------	2	

GROUND FLOOR SLAB-BEAMS

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	GROUND FLOOR SLAB-BEAMS		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S05
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

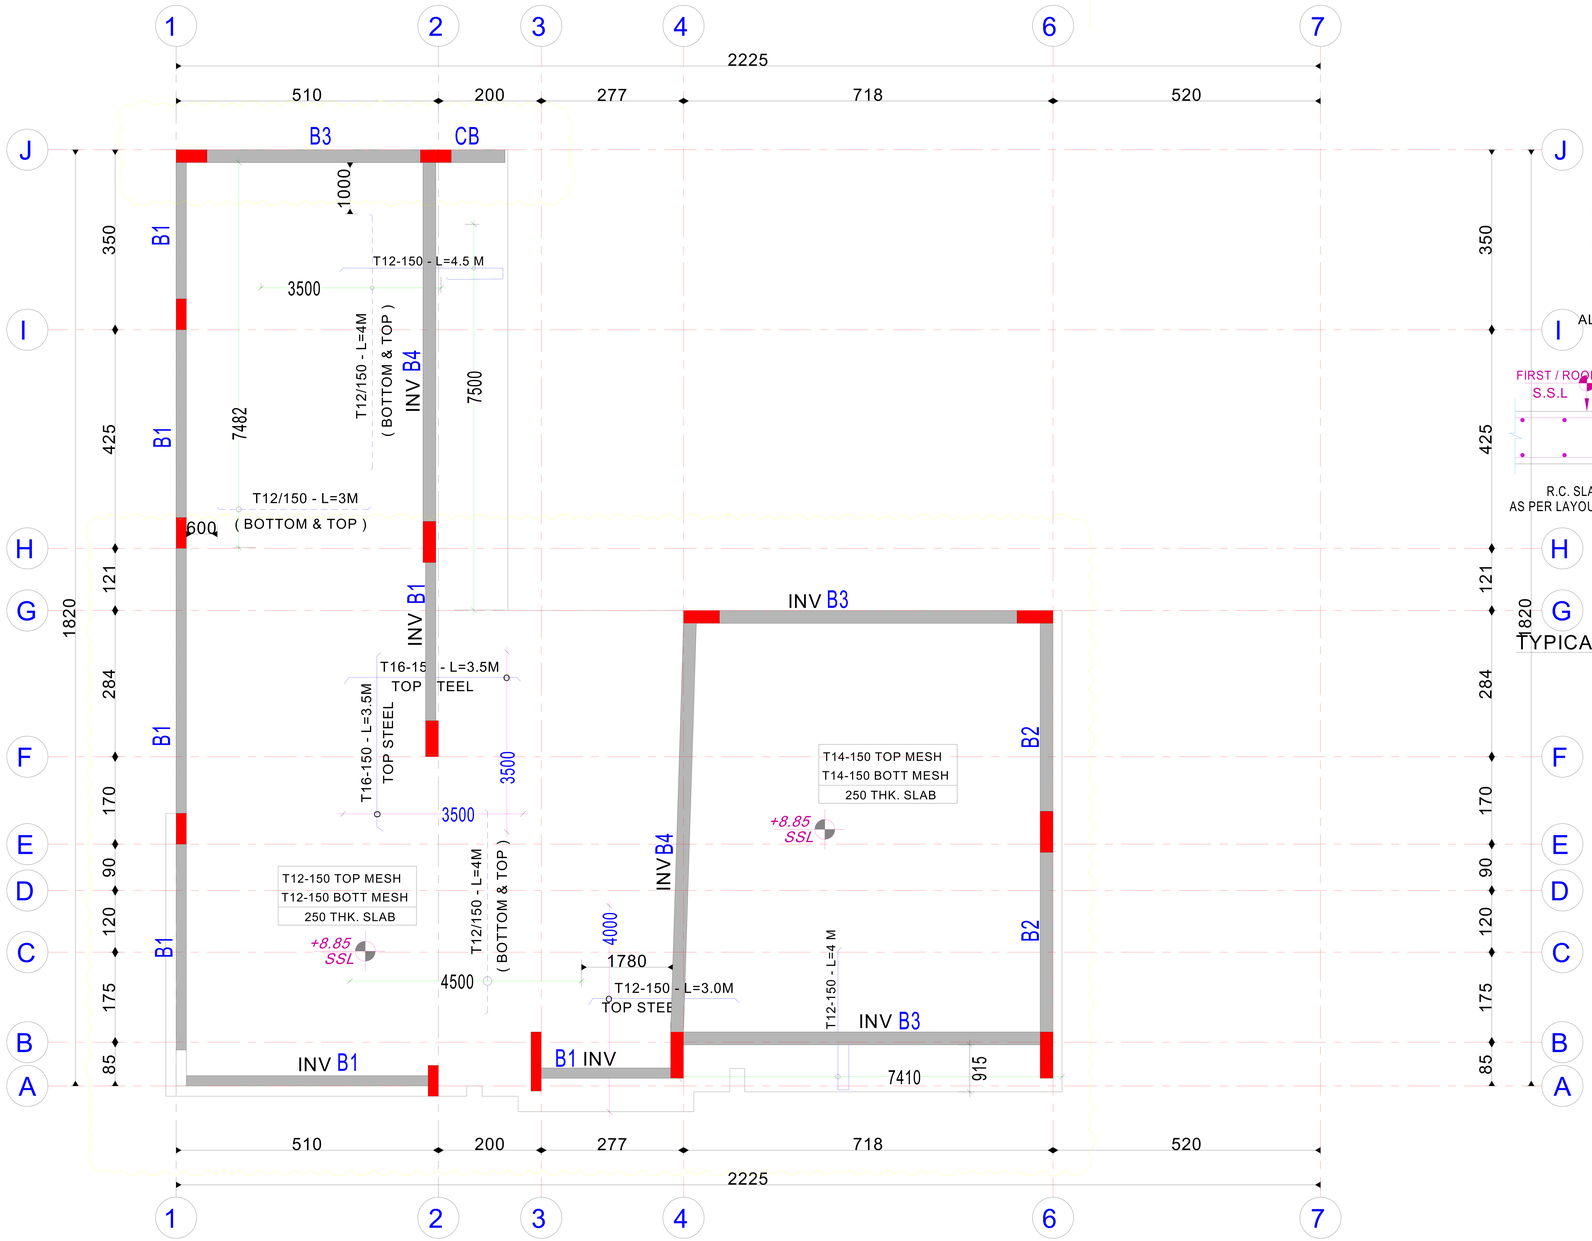

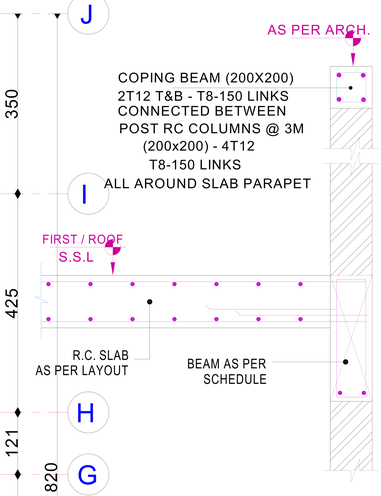

TYPICAL SECTION FOR PARAPET

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

STRUCTURAL NOTES	CONCRETE COVERS :
ACI 318-11	Foundations cover = 75mm
F'C/FCU = 28/35 N/mm2	Columns cover = 40mm
FY = 460N/mm2	Walls cover = 30mm
FYt = 420N/mm2	Beams cover = 40mm
	Slabs & Stairs cover = 25mm

SCHEDULE OF FIRST BEAMS

TYPE	BEAM SIZE	BOTTOM REINFORCEMENT		TOP REINFORCEMENT			SIDE BARS O.E.F (F)	STIRRUPS				NO OF LEGS	REMARKS
								AT SUPPORT		AT MIDSPAN			
	MM XMM	STRAIGHT (A)	EXTRA @ MID SPAN(B)	STRAIGHT (C)	EXTRA @ CONT. SUPPORT (D)	EXTRA @ DISCONT. SUPPORT (E)	EACH SIDE	OUTER (G1)	INNER (G2)	OUTER (H1)	INNER (H2)		
B1	200 X 700	2T16	1T16	2T16	1T16	1T16	1T12	T10-150	--------	T10-200	--------	2	
B2	250X 800	3T18	2T16	2T16	2T16	2T16	2T12	T10-150	--------	T10-200	--------	2	
B3	250 X 900	3T16	3T16	3T16	2T16	2T16	3T12	T10-100	--------	T10-200	--------	2	
B4	250 X 1200	3T18	3T18	3T18	3T16	3T16	4T12	T10-100	--------	T10-200	--------	2	
CB	250 X 900	3T16	---------	3T16+2T16			3T12	T10-100	--------	T10-200	--------	2	

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	FIRST FLOOR SLAB-BEAMS		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S06
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

FIRST FLOOR SLAB-BEAMS

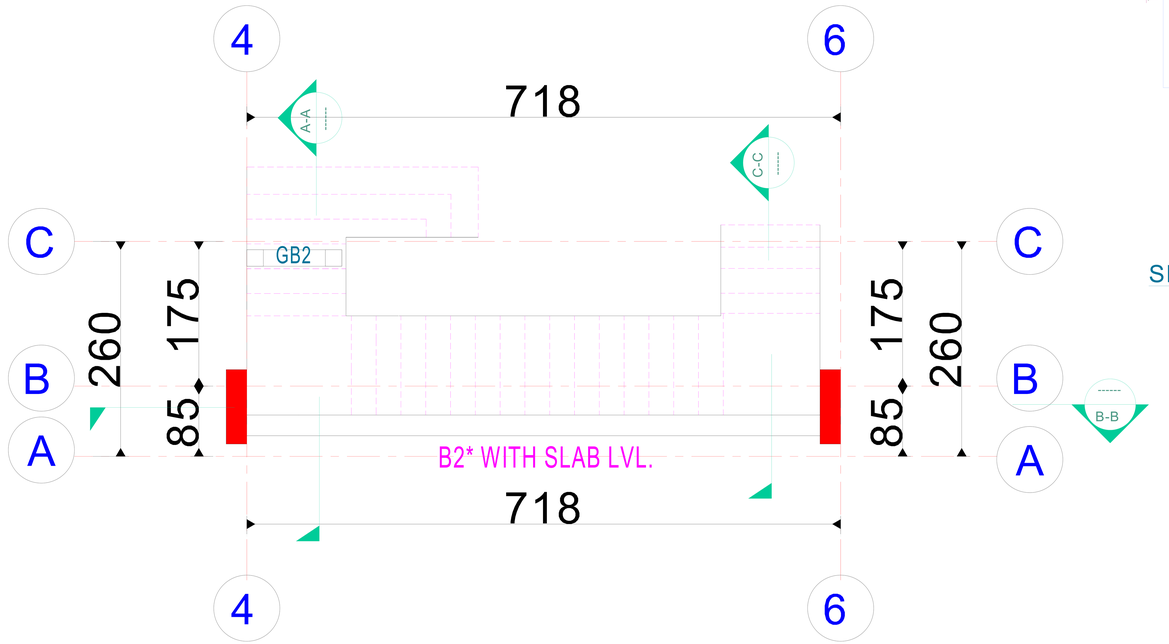

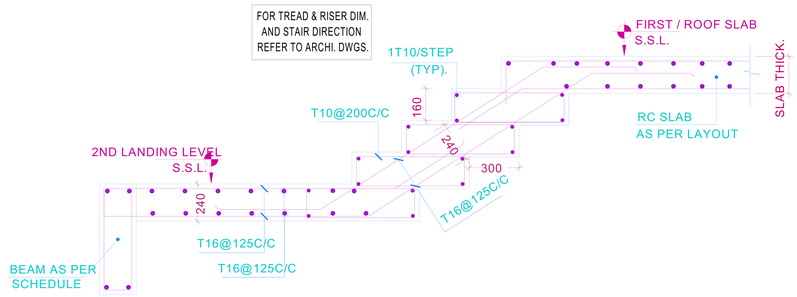

SECTION FROM 2ND LANDING LEVEL TO FIRST / ROOF FLOOR LEVEL

SEC(C-C)

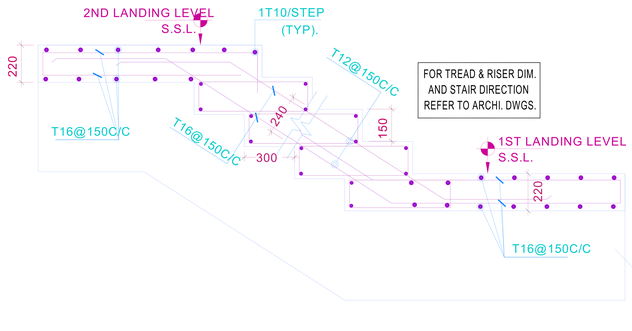

SECTION FROM 1ST LANDING LEVEL TO 2ND LANDING LEVEL

SEC(B-B)

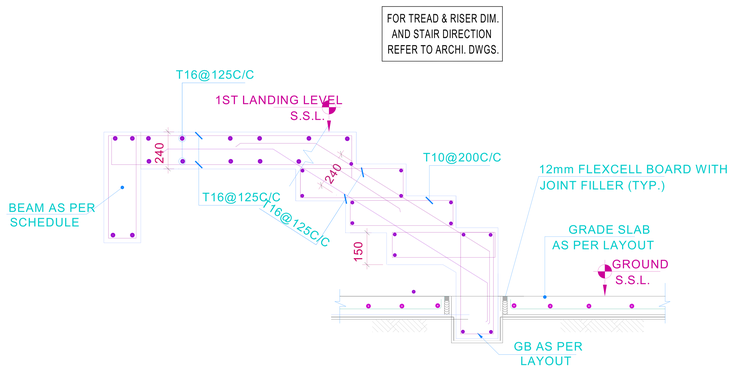

SECTION FROM GROUND FLOOR TO 1ST LANDING LEVEL

SEC(A-A)

STAIR DETAILS

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	STAIR DETAILS		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S07
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

ROOF FLOOR

FIRST FLOOR

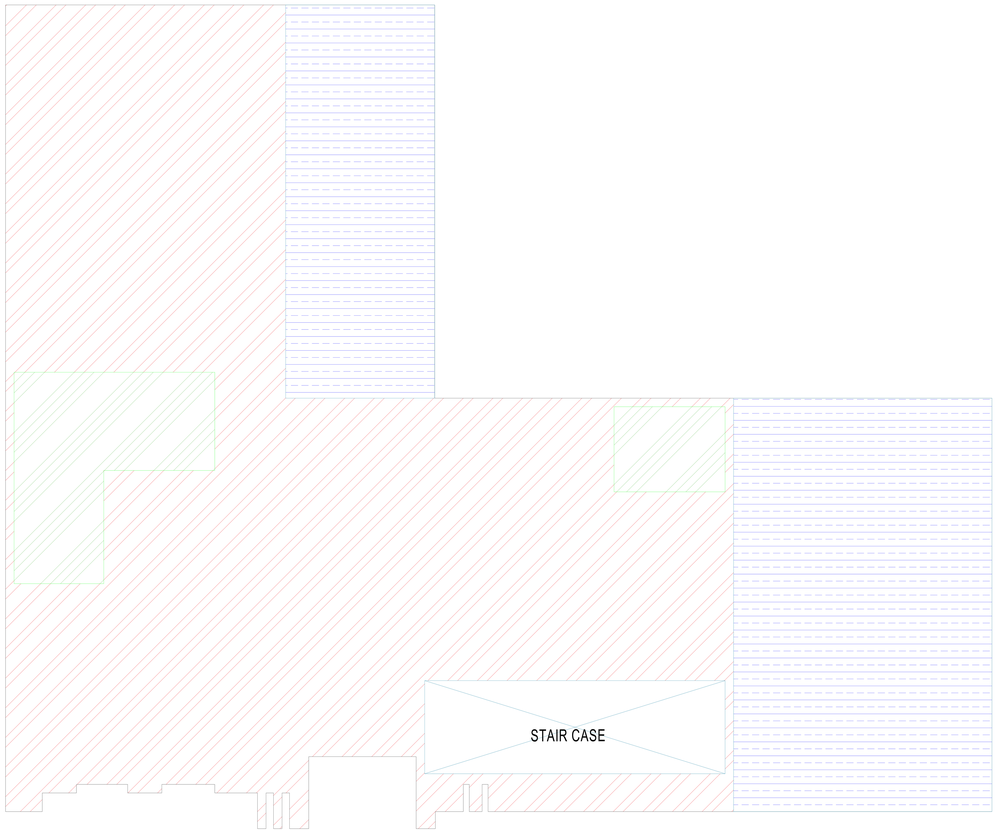

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

SUPER DEAD LOAD = 7.2KN/M2
LIVE LOAD = 2 KN/M2

SUPER DEAD LOAD = 6 KN/M2
LIVE LOAD = 2 KN/M2

SUPER DEAD LOAD = 3 KN/M2
LIVE LOAD = 5 KN/M2

LINEAR LOAD FOR TIE BEAMS				
TYPE	CLEAR HEIGHT (M)	THICK (M)	DENSITY (KN/M3)	LOAD (KN)
WALLS	4.30-0.24= 4.06	0.2	15	12.5
PLASTER	4.06	2*0.02	20	3.5
TOTAL SUPER DEAD LOAD				16 KN/M

PARAPET SUPER DEAD LOAD	4 KN/M

LOADING VALUE - SLAB				
LOCATION	LOAD PATTERNS		ACTUAL LOAD	TOTAL LOAD
SLAB	L.L	LIVE LOAD	2.00	2.00
	SDL	FLOOR FINISH	2.00	6.00
		SERVICE	0.50	
		PARTITIONS LOAD	3.50	
TERRACCE	L.L	LIVE LOAD	5.00	5.00
	S.D.L	DEAD LOAD	3.50	3.50
TANK (Water Height is 1M)	L.L	LIVE LOAD	10.00	10.00
	S.D.L	DEAD LOAD	2.50	2.50
STAIR	L.L	LIVE LOAD	3.00	3.00
	SDL	DEAD LOAD	4.00	4.00

SUPER DEAD LOAD = 3KN/M2
LIVE LOAD = 2 KN/M2

SUPER DEAD LOAD = 3KN/M2
LIVE LOAD = 10 KN/M2

ALL GLASS MUST BE DOUBLE UNITES

U-value (w/m2.k)<_ 1.8

SHADING CO- EFFICIENT (SC) <0.3

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	FLOOR LOADING PLAN		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S08
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

FLOOR LOADING

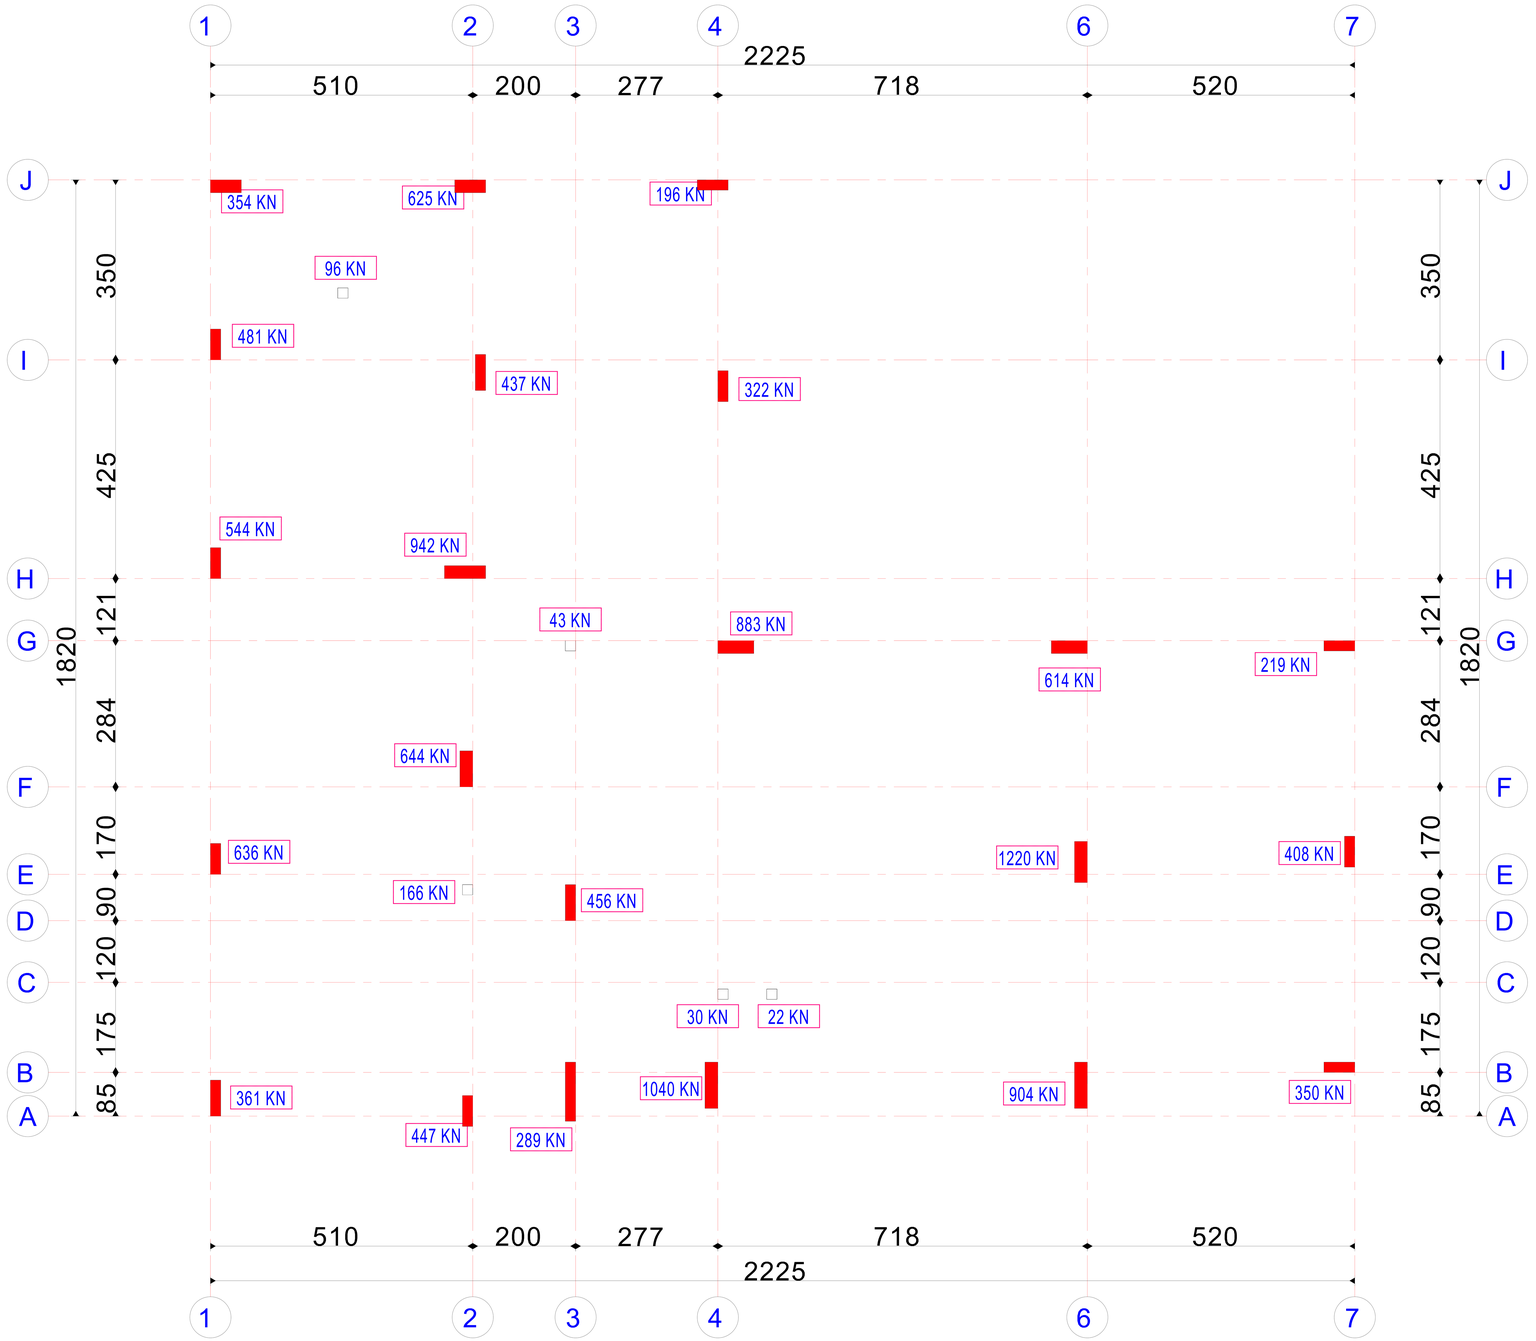

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

STRUCTURAL NOTES

ACI 318-11

F'C/FCU = 28/35 N/mm2

FY = 460N/mm2

FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm

Columns cover = 40mm

Walls cover = 30mm

Beams cover = 40mm

Slabs & Stairs cover = 25mm

LEGEND:

1) COLUMN / WALL TO BE CONTINUED

2) COLUMN / WALL TO BE TERMINATED

Savana
Engineering Consultancy & Interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	COLUMNS WORKING REACTIONS		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S09
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

COLUMN WORKING REACTION

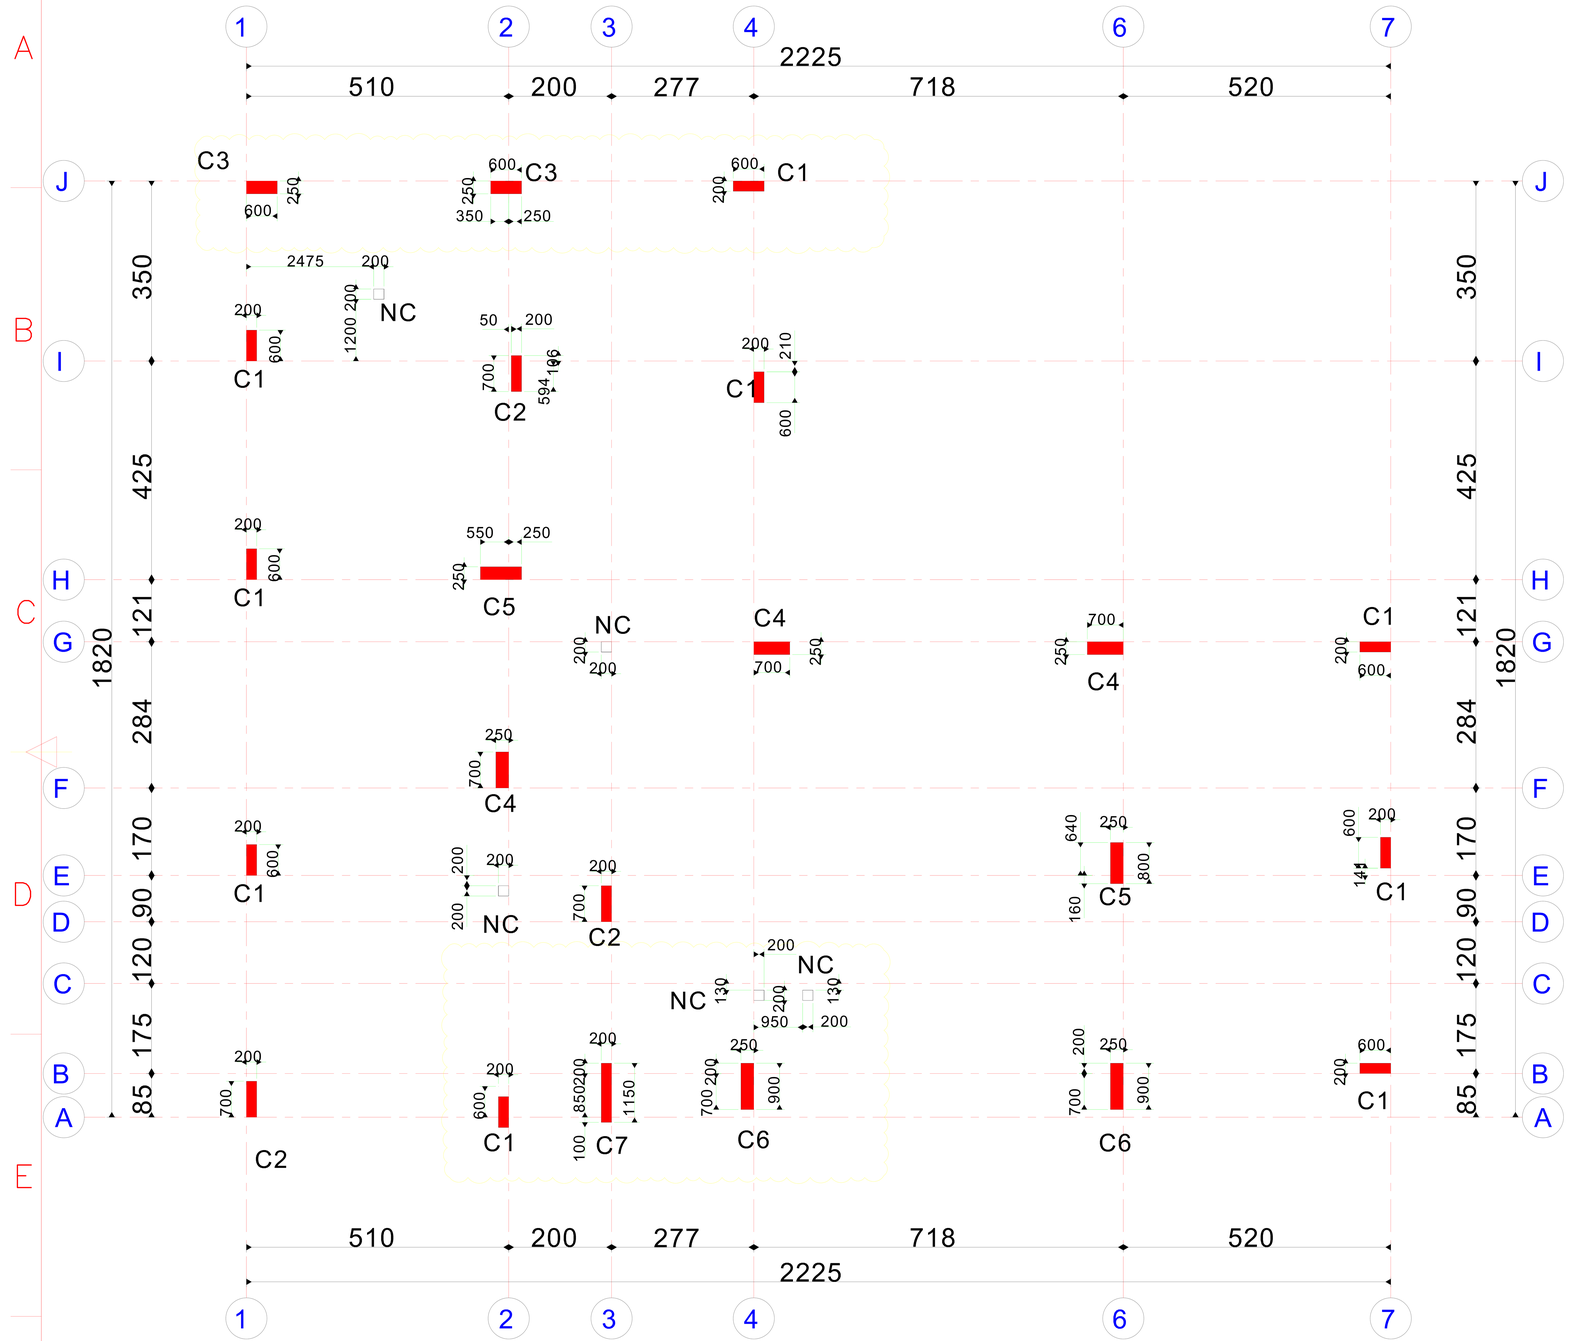

SCHEDULE OF COLUMNS

C1		Main Bar : 8T16 Links : (1T8-150)+(1T8-150) EXTERNAL INTERNAL
C2		Main Bar : 10T16 Links : (1T10-150)+(2T8-150) EXTERNAL INTERNAL
C3		Main Bar : 10T16 Links : (1T10-150)+(1T8-150) EXTERNAL INTERNAL
C4		Main Bar : 12T16 Links : (1T10-150)+(1T8-150) EXTERNAL INTERNAL
C5		Main Bar : 14T16 Links : (1T10-150)+(1T8-150) EXTERNAL INTERNAL
C6		Main Bar : 16T16 Links : (1T10-150)+(2T10-150) EXTERNAL INTERNAL
C7		Main Bar : 20T16 Links : (1T10-150)+(3T10-150) EXTERNAL INTERNAL
NC		UP TO GROUND SSL ONLY Main Bar : 4T14 Links : (1T8-150) EXTERNAL
NC1		UP TO GROUND SSL ONLY Main Bar : 4T14 Links : (1T8-150) EXTERNAL

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Approved By:

STRUCTURAL NOTES

ACI 318-11

F'C/FCU = 28/35 N/mm2

FY = 460N/mm2

FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm

Columns cover = 40mm

Walls cover = 30mm

Beams cover = 40mm

Slabs & Stairs cover = 25mm

LEGEND:

COLUMN / WALL TO BE CONTINUED

COLUMN / WALL TO BE TERMINATED

Savana
Engineering Consultancy & Interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	DOUBLE STORY VILAA		
Drg.Title	FOUNDATION AND GROUND FLOOR COLUMN LAYOUT		
Area	ARIFAA	Floortype	
Case ID.	2673358	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	S10
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG.IBRAHIM

FOUNDATION AND GROUND FLOOR COLUMN LAYOUT

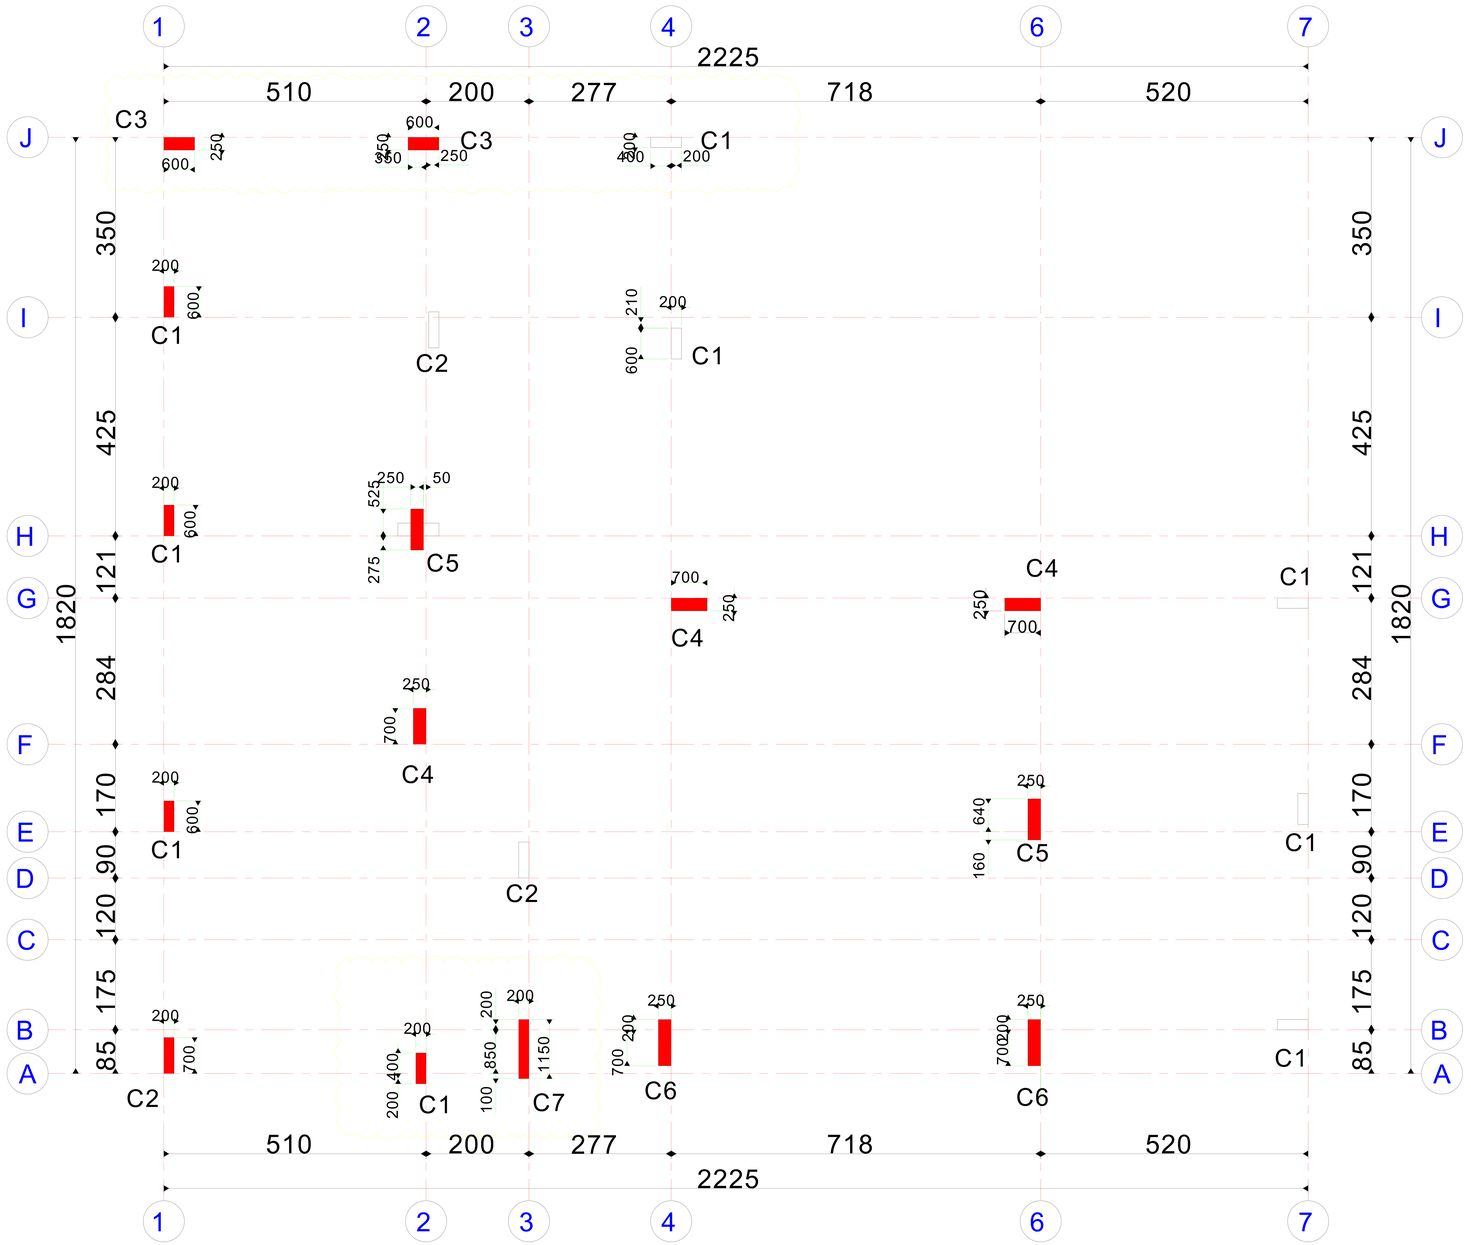

SCHEDULE OF COLUMNS

C1	600 / 200	Main Bar : 8T16 Links : (1T8-150)+(1T8-150) EXTERNAL INTERNAL
C2	700 / 200	Main Bar : 10T16 Links : (1T10-150)+(2T8-150) EXTERNAL INTERNAL
C3	600 / 250	Main Bar : 10T16 Links : (1T10-150)+(1T8-150) EXTERNAL INTERNAL
C4	700 / 250	Main Bar : 12T16 Links : (1T10-150)+(1T8-150) EXTERNAL INTERNAL
C5	800 / 250	Main Bar : 14T16 Links : (1T10-150)+(1T8-150) EXTERNAL INTERNAL
C6	900 / 250	Main Bar : 16T16 Links : (1T10-150)+(2T10-150) EXTERNAL INTERNAL
C7	1150 / 200	Main Bar : 20T16 Links : (1T10-150)+(3T10-150) EXTERNAL INTERNAL
NC	200 / 200	UP TO GROUND SSL ONLY Main Bar : 4T14 Links : (1T8-150) EXTERNAL
NC1	250 / 250	UP TO GROUND SSL ONLY Main Bar : 4T14 Links : (1T8-150) EXTERNAL

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

STRUCTURAL NOTES

ACI 318-11

F'C/FCU = 28/35 N/mm2

FY = 460N/mm2

FYt = 420N/mm2

CONCRETE COVER

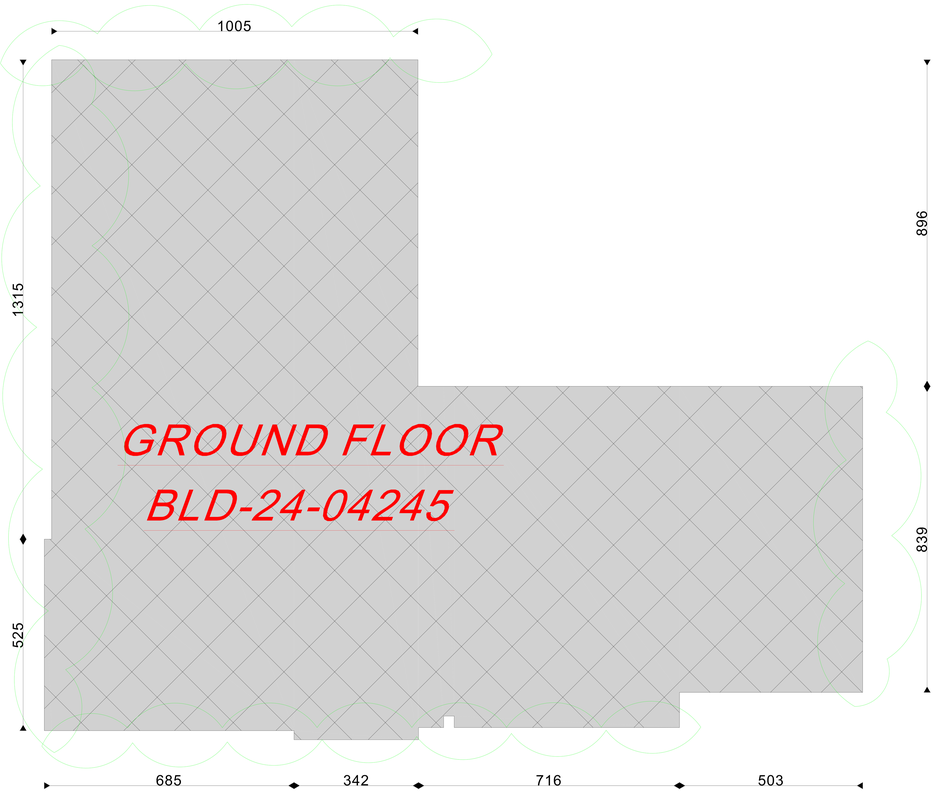

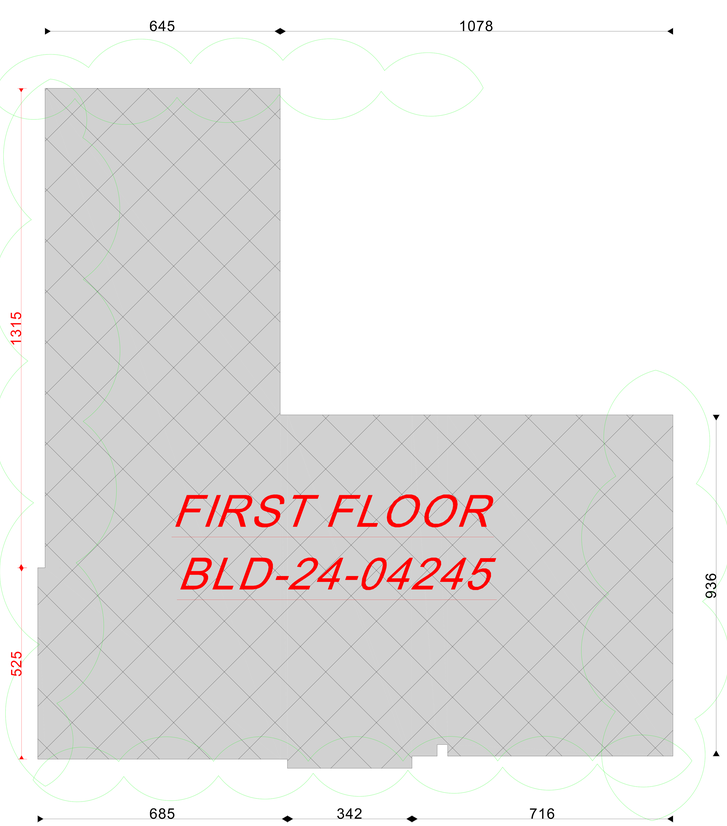

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On / اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Area Statement	
Building Number	BLD-24-04245
Ground Floor Area	296
First Floor Area	222
Total Building Area	518
PLOT AREA ACCORDING TO KRUKI	999.33m²
BUILD UP RATIO	29.6

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	AreaStatement		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A-01
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

AREA STATMENTENT

REAR

NEIGHBOR 406131921

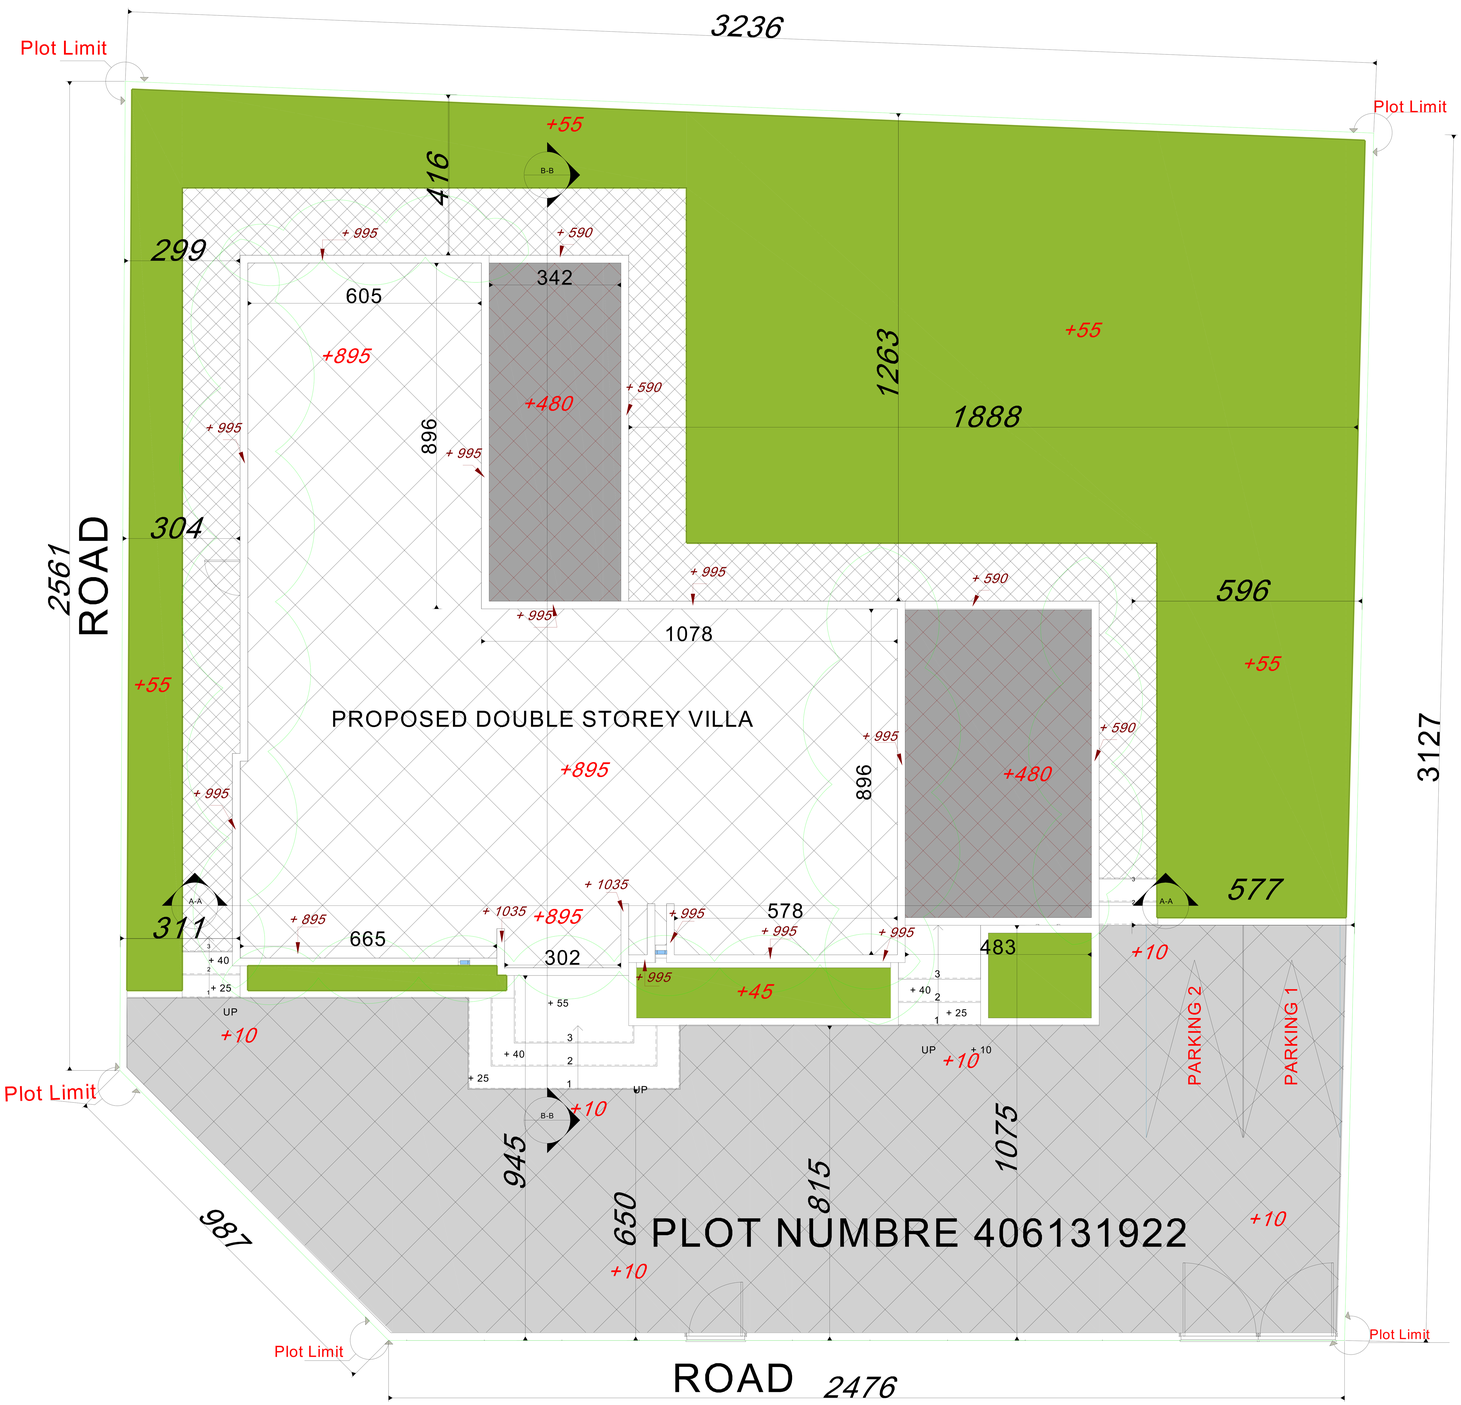

N
W
N
E
S

RIGHT

FRONT

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Note :-

* Rcc Lintels Must Be Made On Top Of All Doors , Arches And Windows All Of Them Are At Least 0.20 m Thick.
* All Blocks Adjacent To All Doors , Arches And Windows Must Be A Solid Block .

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	Site Development Layout Plan		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A02
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

SITE DEVELOPMENT LAYOUT PLAN

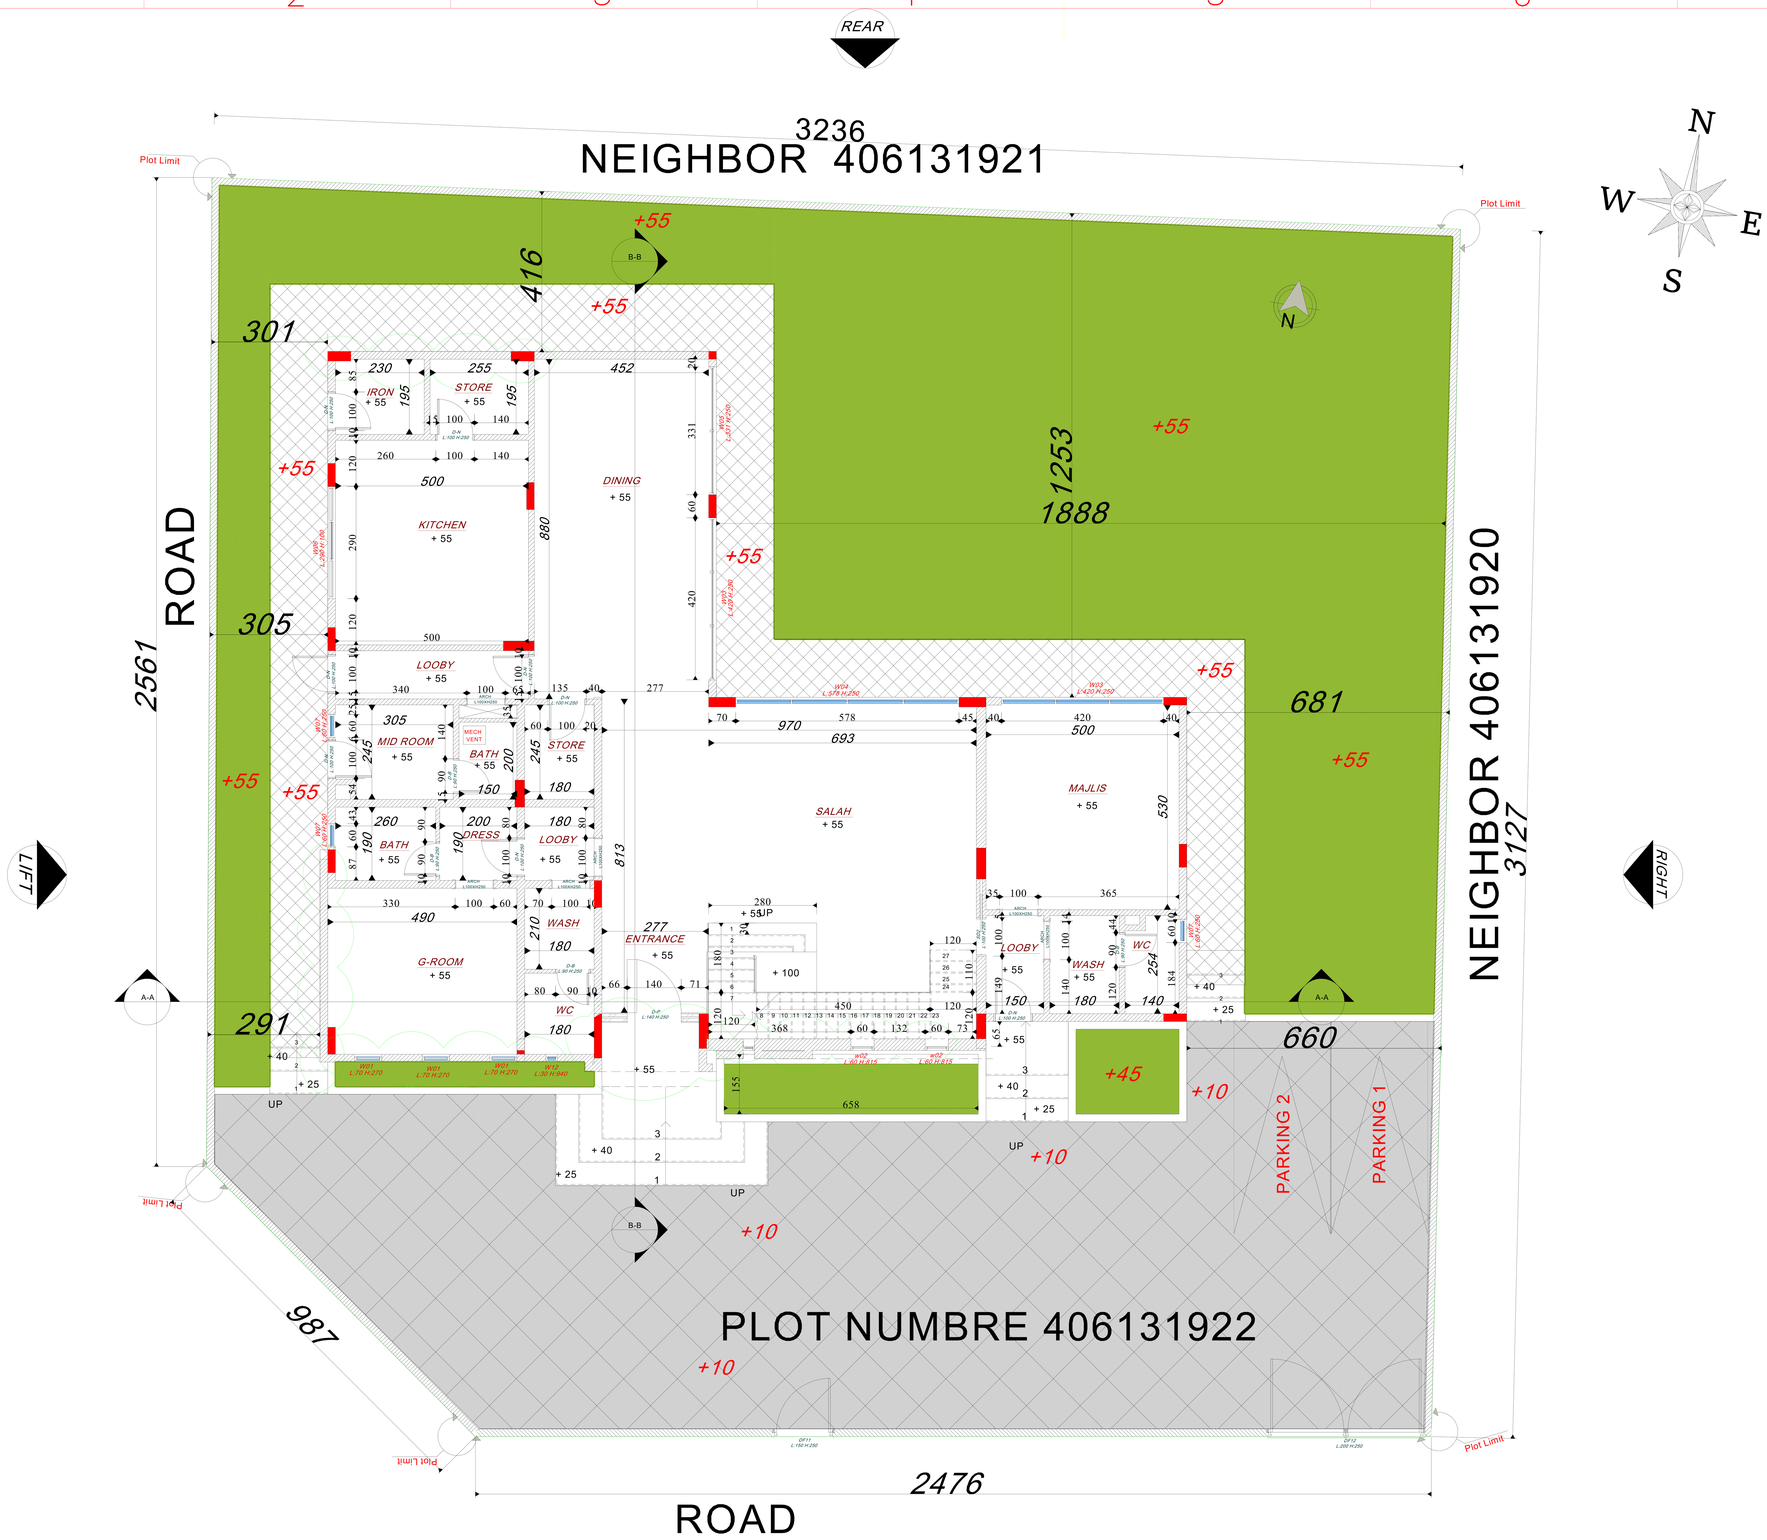

Govement Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	SITE SETTING PLAN		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A03
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

SITE SETTING PLAN

REAR

B-B

N

W E

S

2225

510 | 200 | 277 | 718 | 520

+ 995 | + 590

605 | 342

350 | 896 | 425 | 121 | 284 | 170 | 90 | 120 | 175 | 85

1820

+895 | +480

+ 995 | + 590 | + 1035

1078

PROPOSED DOUBLE STOREY VILLA

685 | 302 | 138 | 578 | 483

48

LIFT | RIGHT | FRONT

A-A

B-B

FINISHING FOR BATH,WC & WASH AREA

F1	Ceramic glazed tiles	FLOORING
F2	Ceramic Tiles (Non Slippery)	
F3	Marble Tiles	
W1	Acrylic emulsion paint	WALLS
W2	Ceramic tiles up to ceiling	
W3	Epoxy paint.	
S1	Ceramic Tiles. 10cm hight	SKIRTING
S2	Marble tiles 10cm hight	
C1	Acrylic emulsion paint	CEILING
C2	Oil Paint.	
C3	Epoxy paint.	

FINISHING FOR DRESSING

FINISHING FOR VERANDAH

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائـرة البلـدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	TOP ROOF PLAN		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A06A
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

TOP ROOF FLOOR PLAN

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration
حكومة رأس الخيمة
دائرة البلدية
إدارة المباني
Approved On
اعتمد في
31 October 2024
Building Permit #:
PRMT-24-0004844
Appoved By:

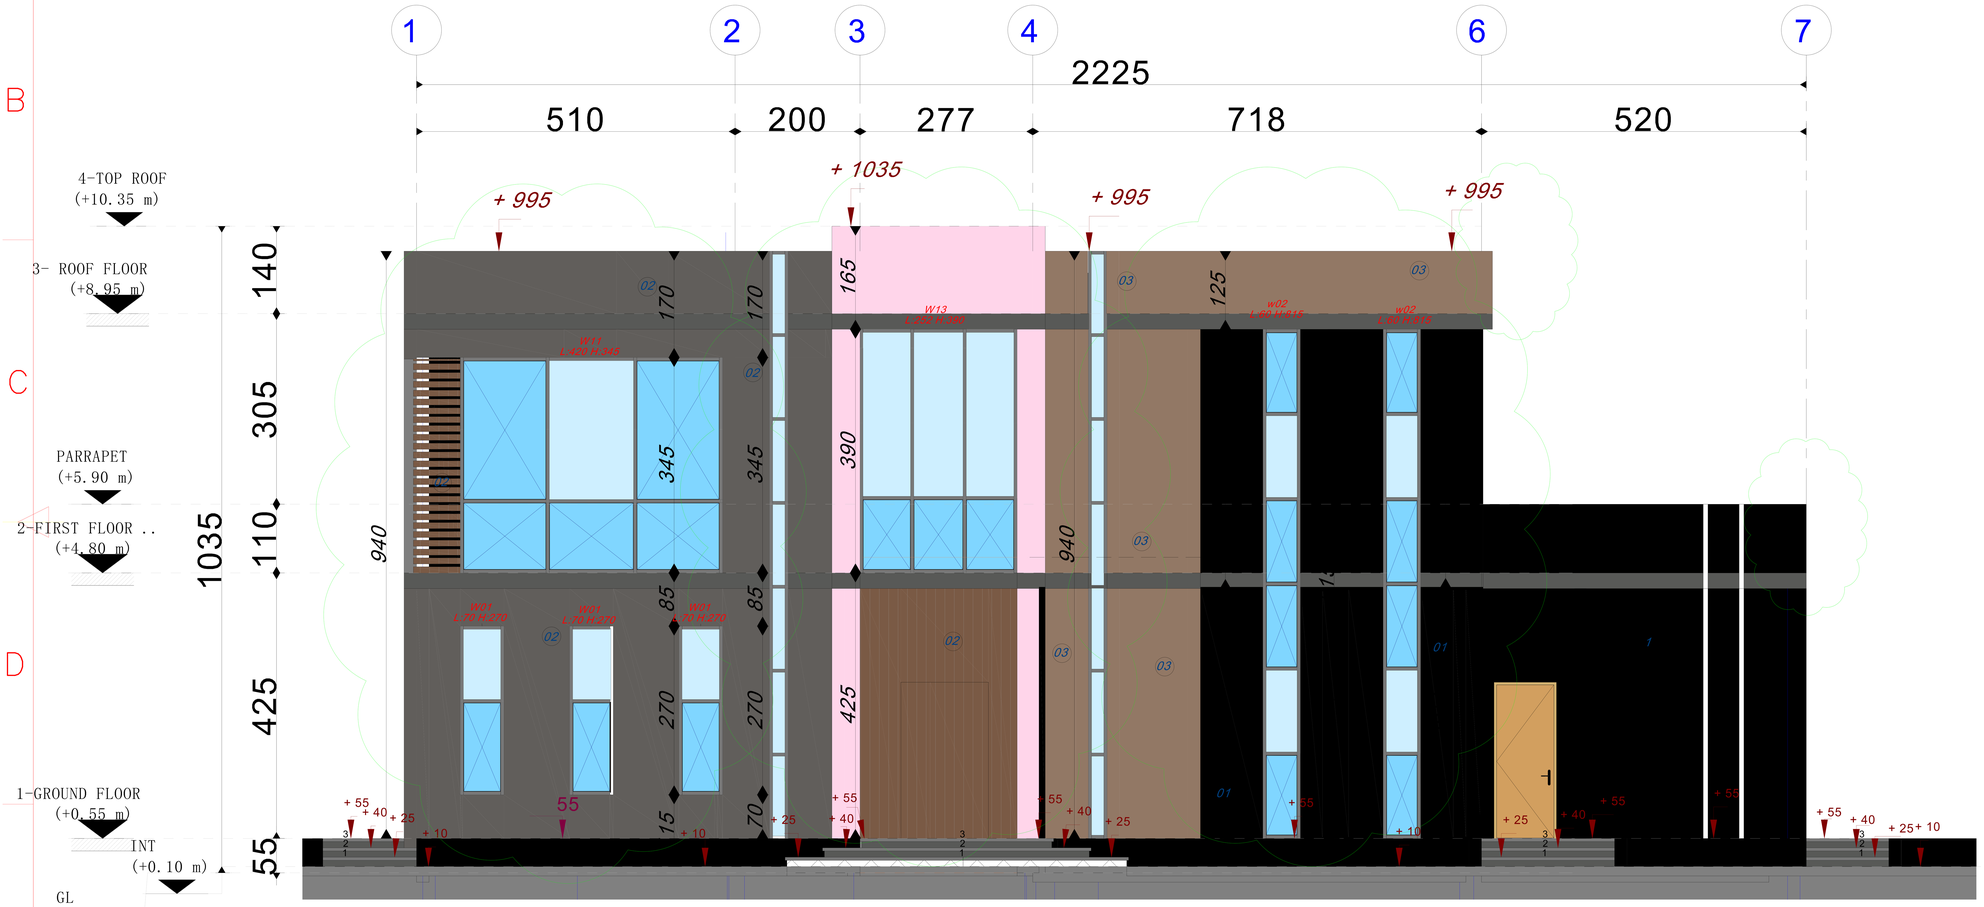

FRONT ELEVATION

FINSHING	
1	FULL EPOXY PAINT [white]
2	WOOD Aluminum
3	
4	

Savana
Engineering Consultancy & Interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	FRONT ELEVATION		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A07
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

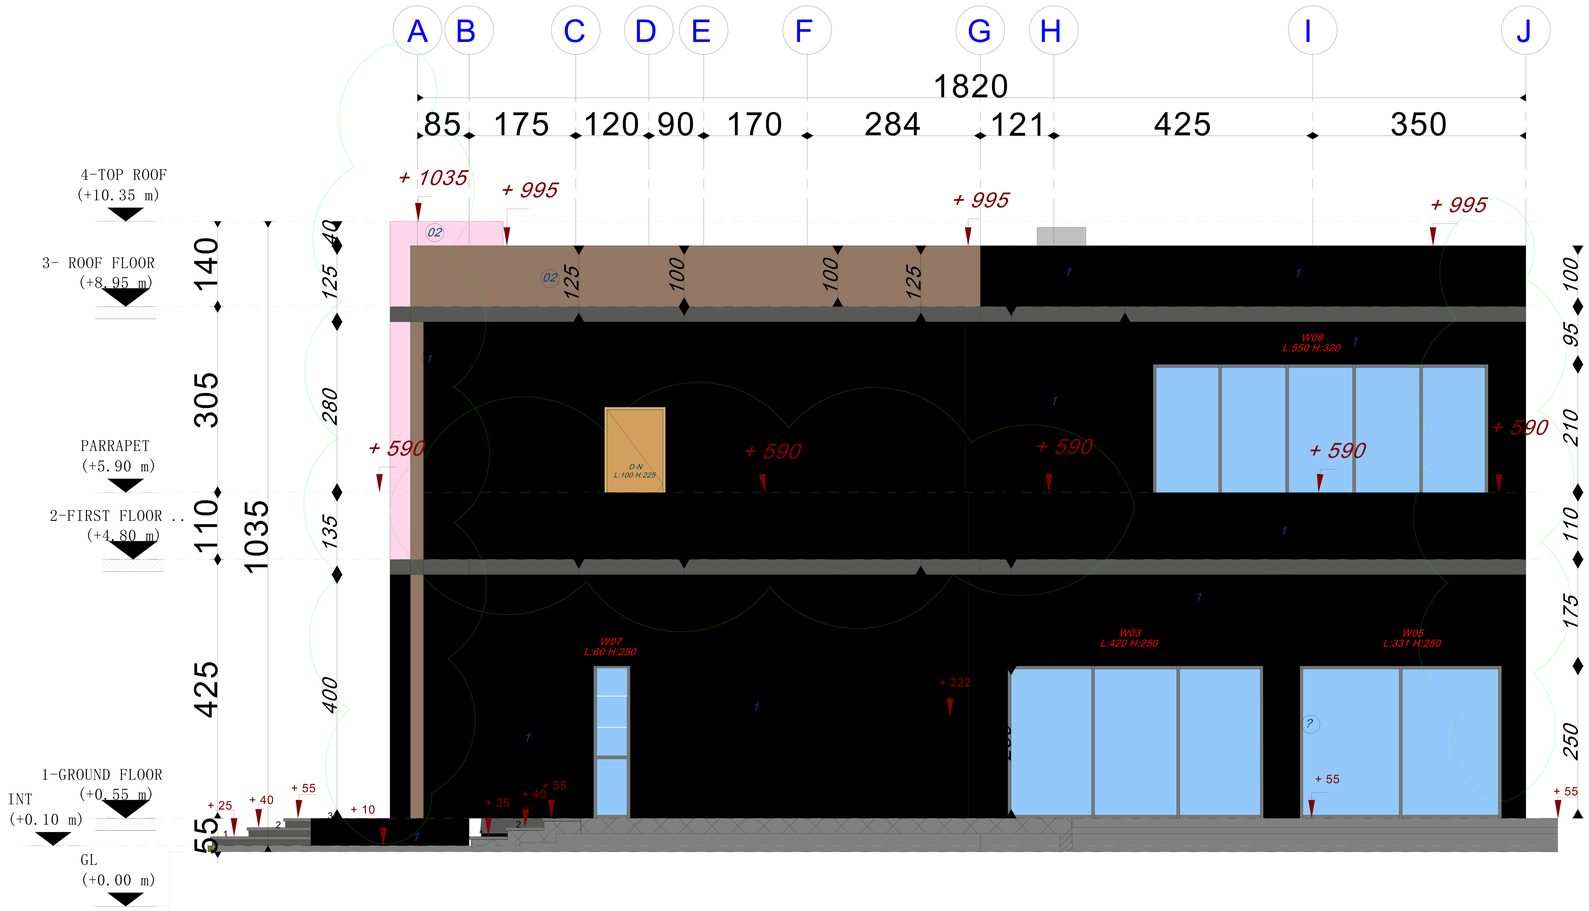

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

FINSHING	
1	FULL EPOXY PAINT [white]
2	WOOD Aluminum
3	
4	

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	RIGHT ELEVATION		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A08
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

RIGHT ELEVATION

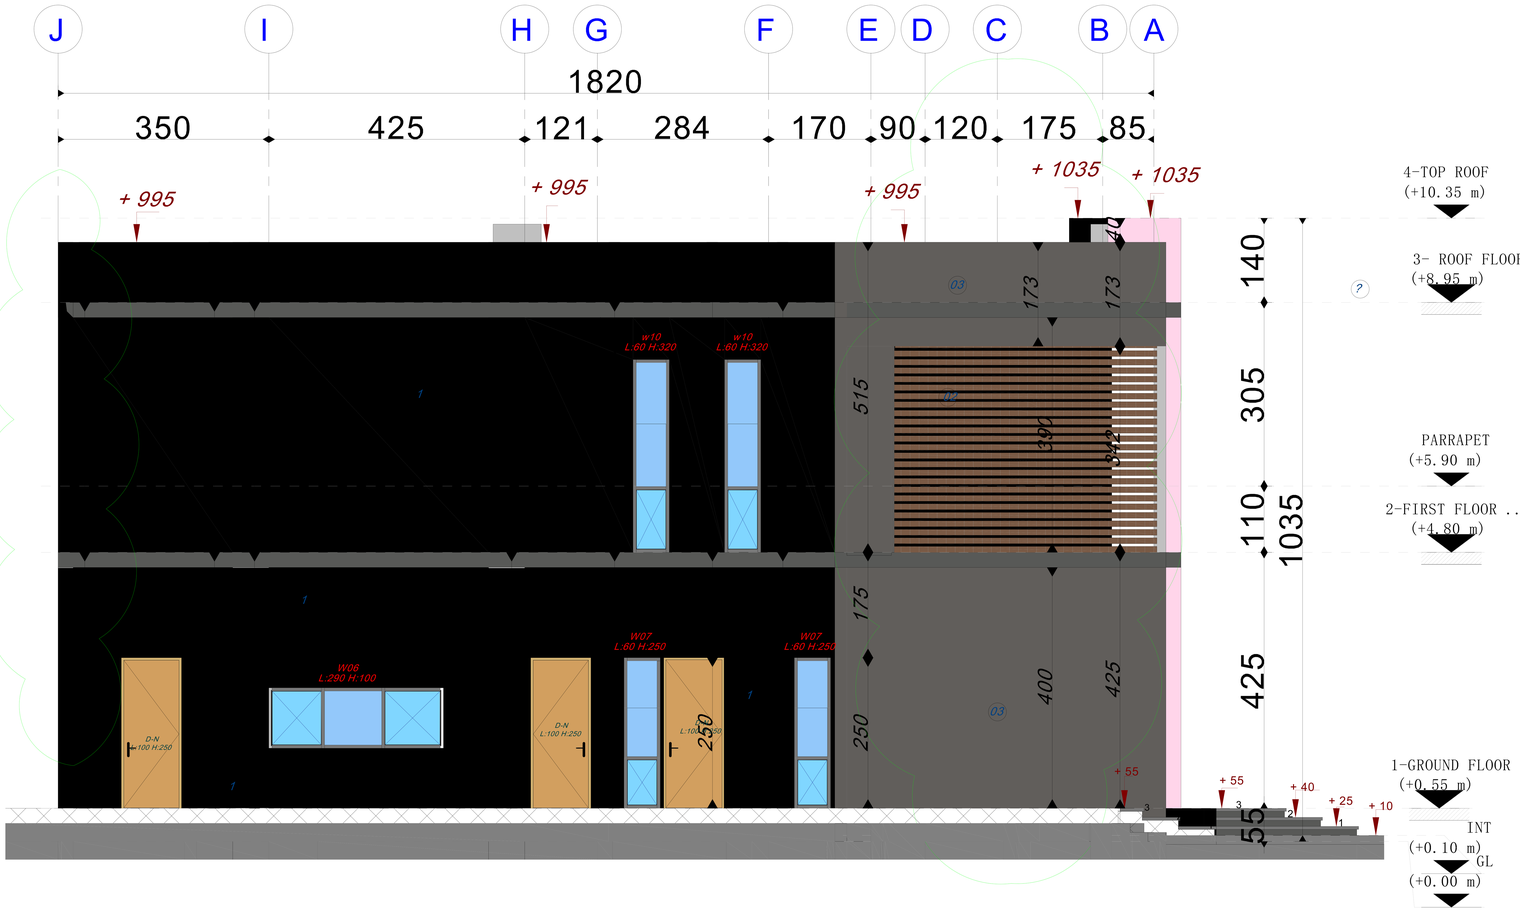

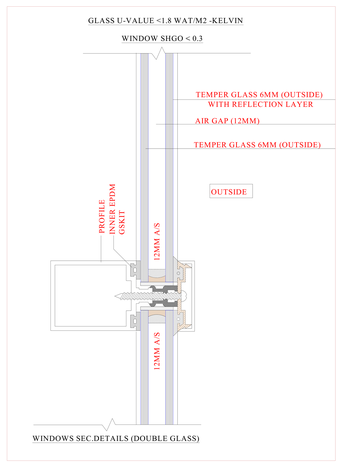

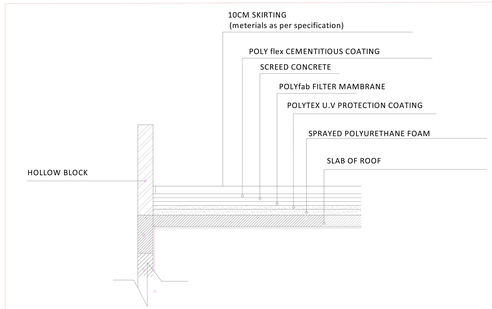

DETAIL FOR COMBO SYSTEM
U-VALUE <0.3 W/M2 K

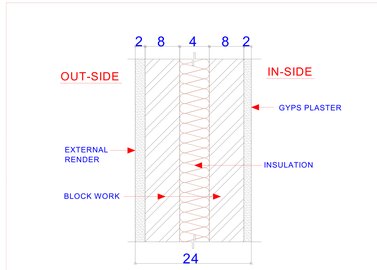

As per E. Walls Predefined Section: W - 1 - A

DETAIL 'W1'	TYPICAL FOR EXTERNAL WALL USING INSULATED CONC. BLOCK (200 mm) U-VALUE < 0.5 W/M2 K

LEFT ELEVATION

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

* Rcc Lintels Must Be Made On Top Of All Doors , Arches And Windows All Of Them Are At Least 0.20 m Thick.
* All Blocks Adjacent To All Doors , Arches And Windows Must Be A Solid Block .

U VALUE AND SHGC

ALL GLASS MUST BE DOUBLE UNITES

GLASS SPECIFICATION:-

U-value (w/m2.k)<_ 1.8

SHADING CO- EFFICIENT (SC) <0.3

FINSHING	
1	FULL EPOXY PAINT [white]
2	WOOD Aluminum
3	FULL EPOXY BLACK PAINT
4	

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	LIFT ELEVATION		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A09
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On
اعتمد في

31 October 2024

Building Permit #:
PRMT-24-0004844

Appoved By:

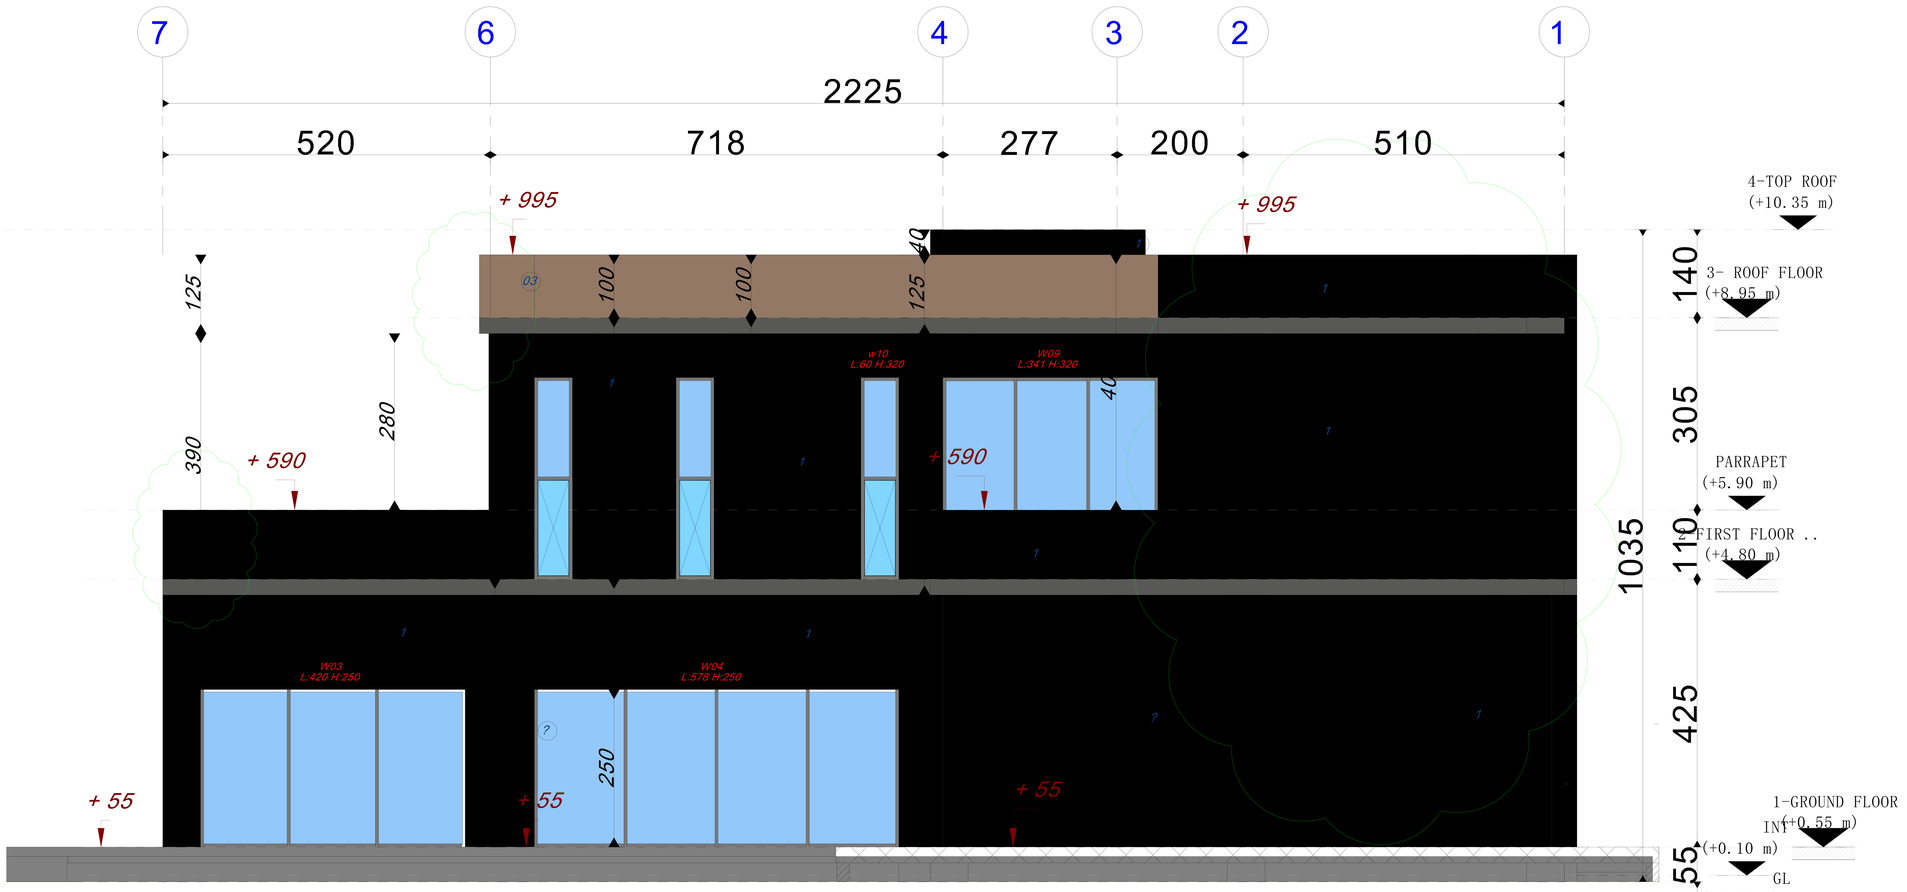

FINSHING	
1	FULL EPOXY PAINT [white]
2	WOOD Aluminum
3	
4	

Savana
Engineering Consultancy & Interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	REAR ELEVATION		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A10
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

10

REAR ELEVATION

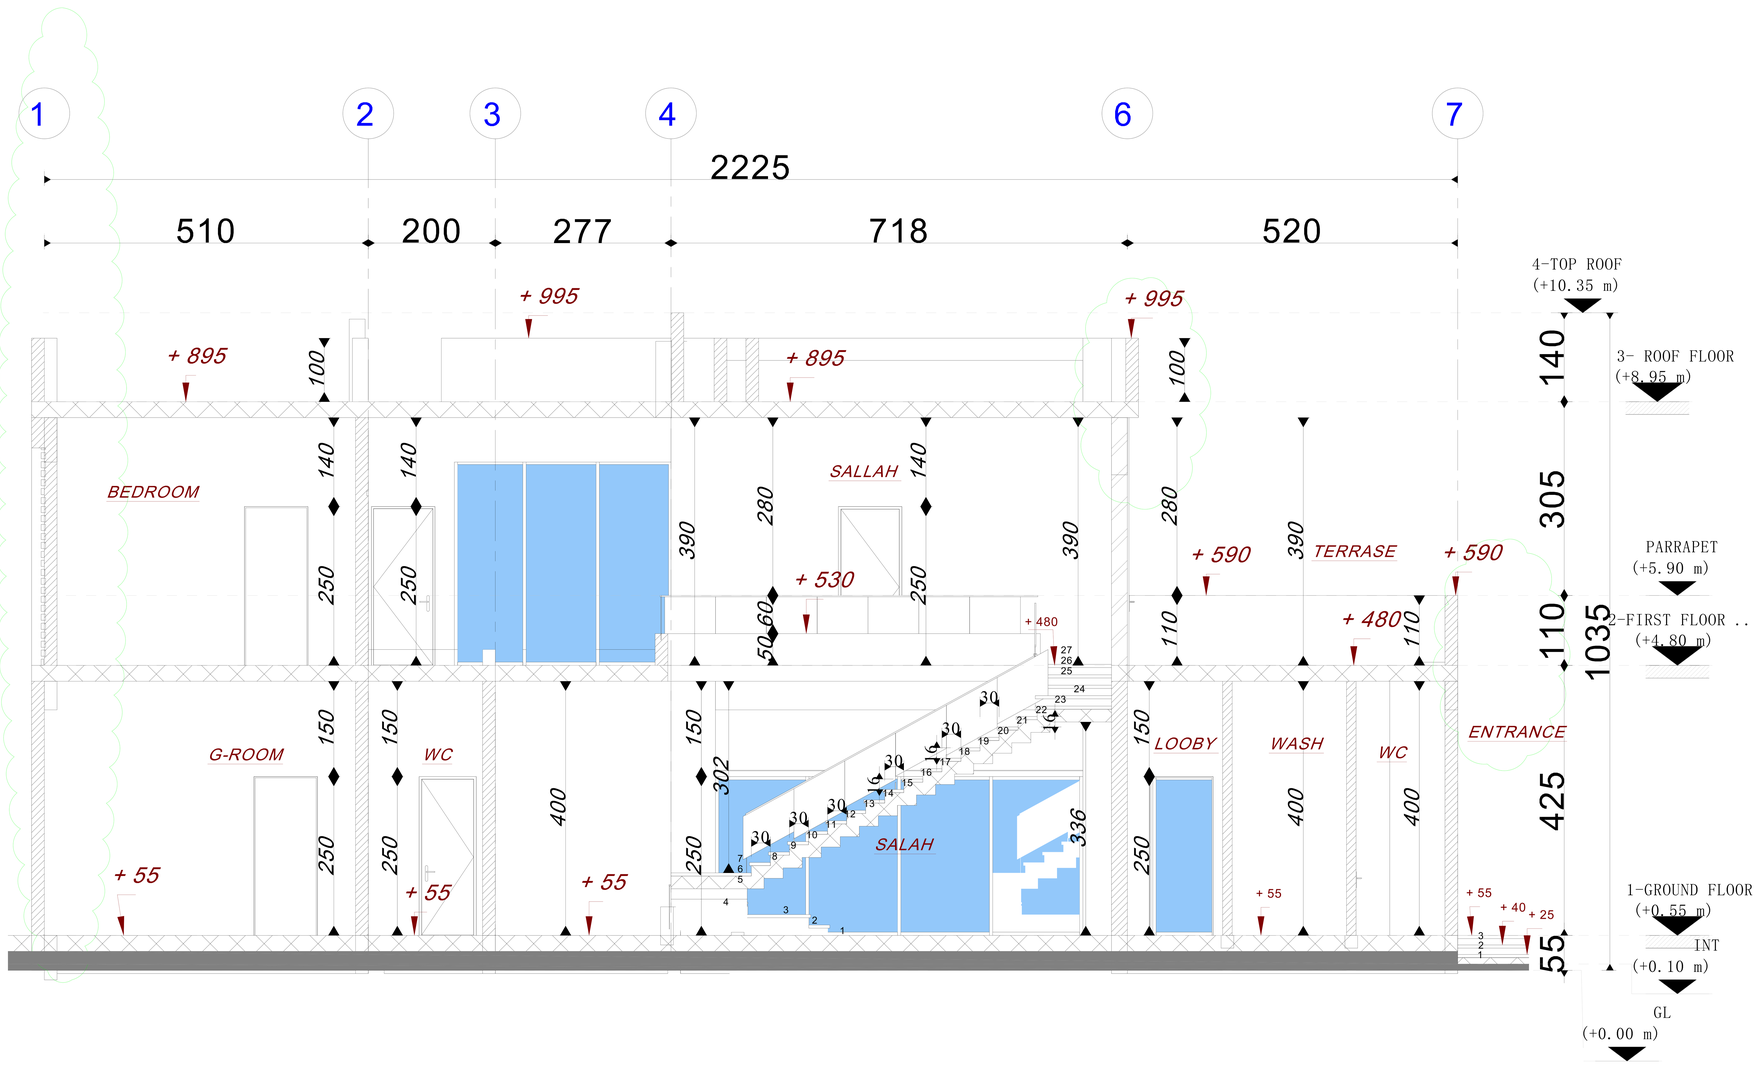

Govvernment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

ALL GLASS MUST BE DOUBLE UNITES

U-value (w/m2.k)<_ 1.8

SHADING CO- EFFICIENT (SC) <0.3

FINSHING	
1	FULL EPOXY PAINT [white]
2	WOOD Aluminum
3	
4	

Savana
Engineering Consultancy & Interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	SECTION A-A		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A11
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

SECTION A-A

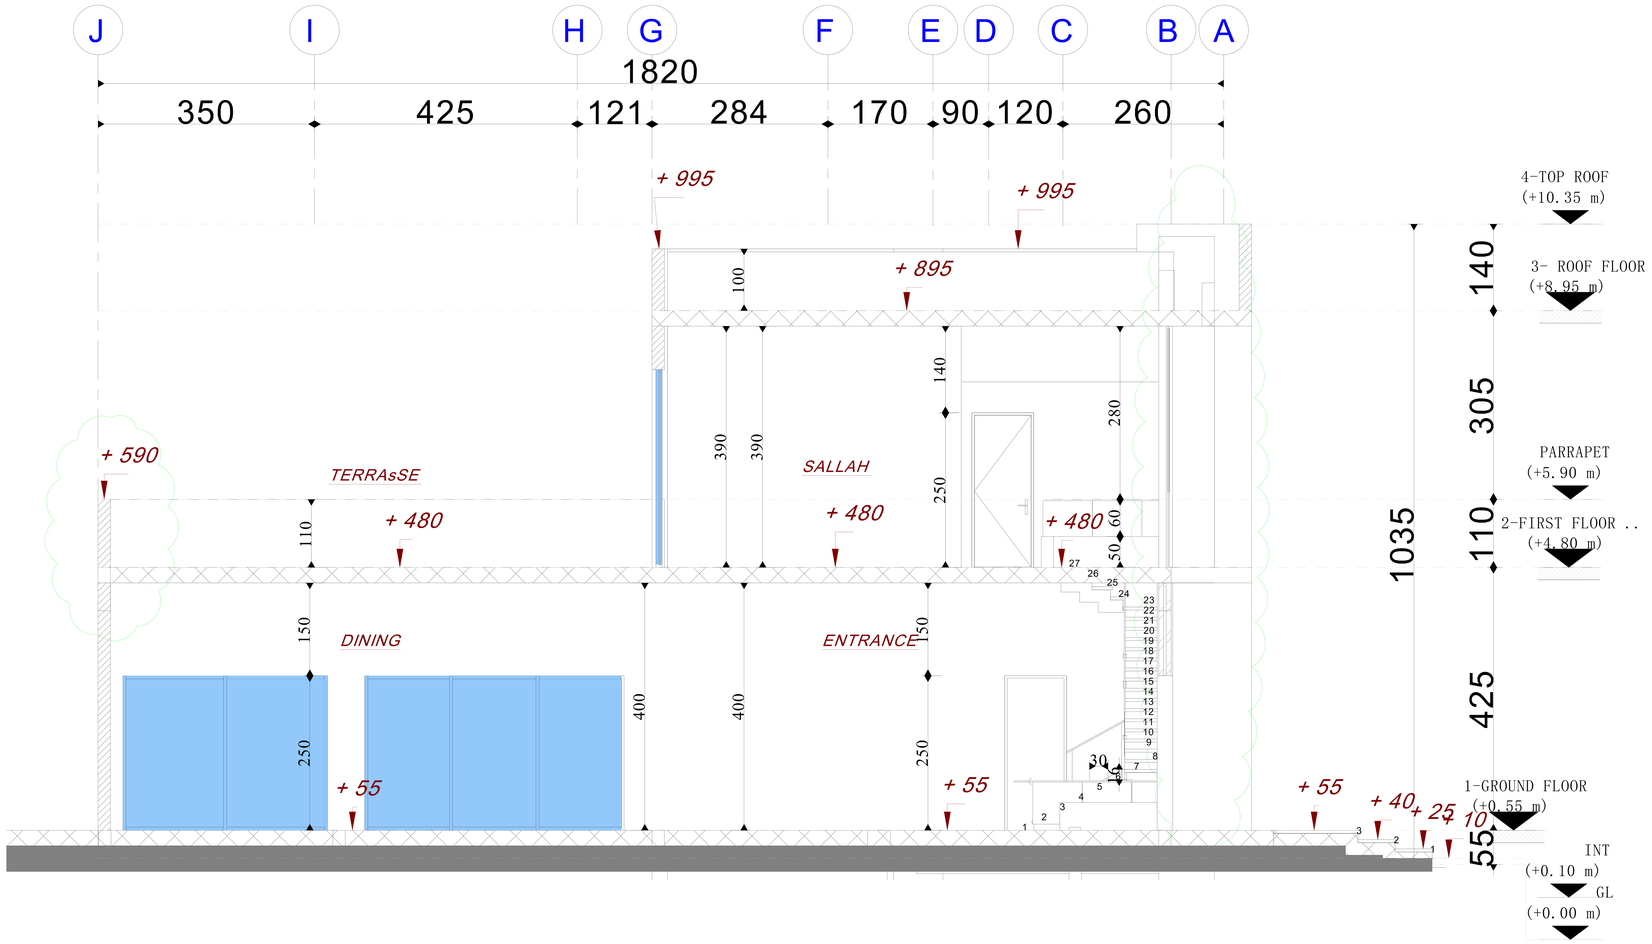

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

ALL GLASS MUST BE DOUBLE UNITES

GLASS SPECIFICATION:-

U-value (w/m2.k)<_ 1.8

SHADING CO- EFFICIENT (SC) <0.3

FINSHING	
1	FULL EPOXY PAINT [white]
2	WOOD Aluminum
3	
4	

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	SECTION B-B		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A12
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

SECTION B-B

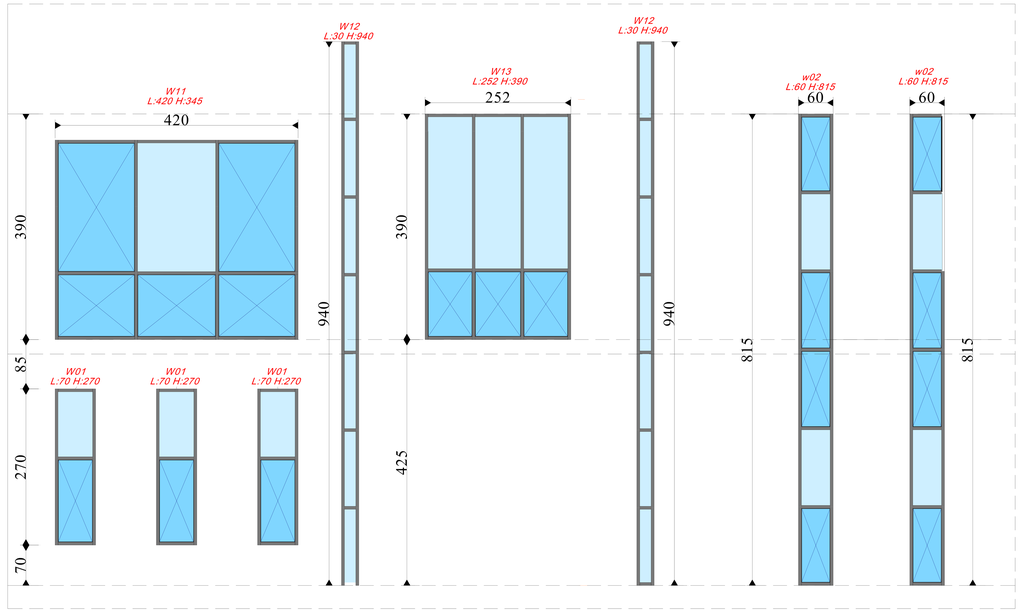

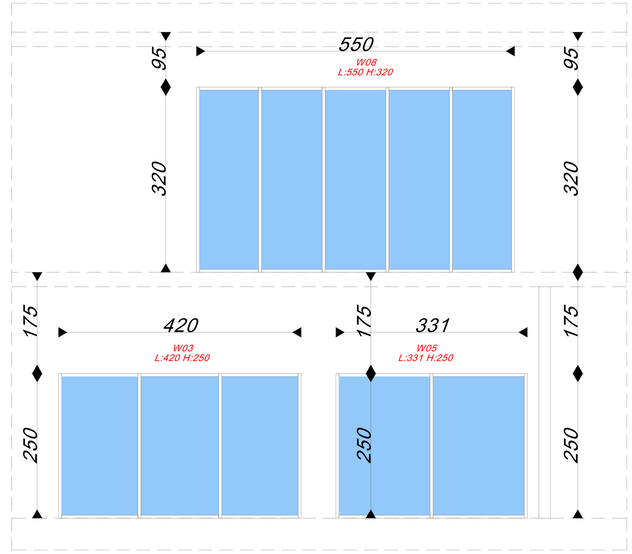

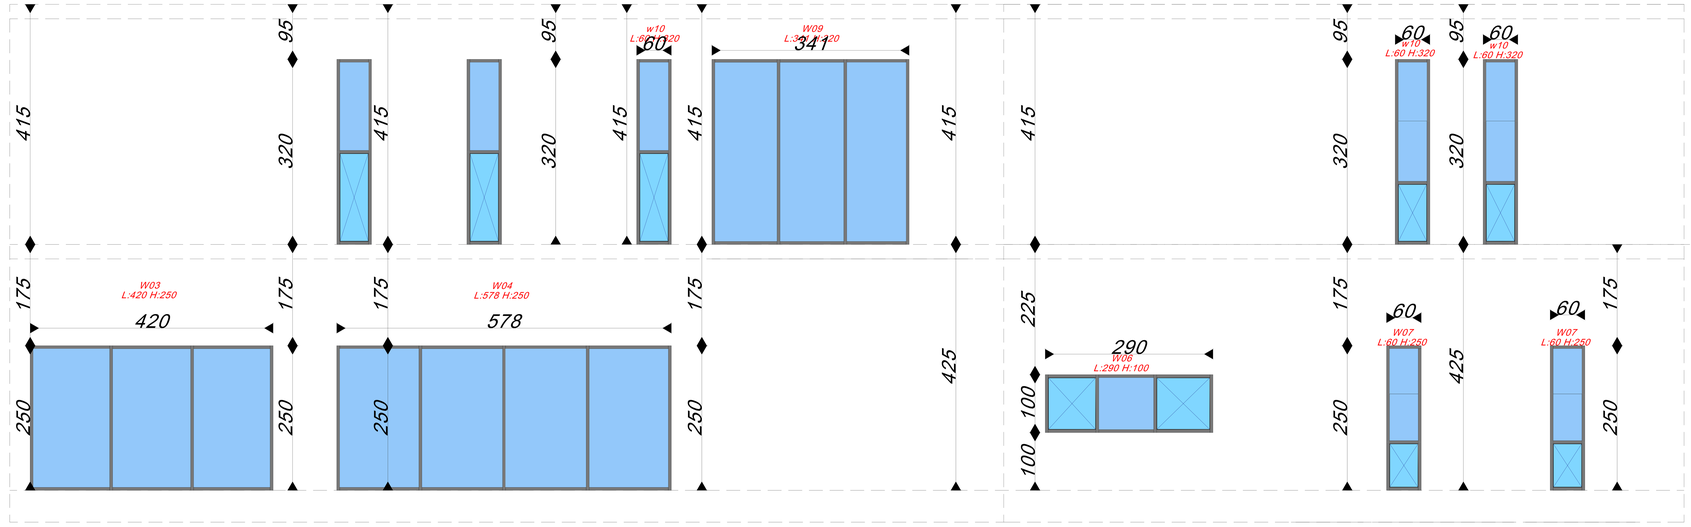

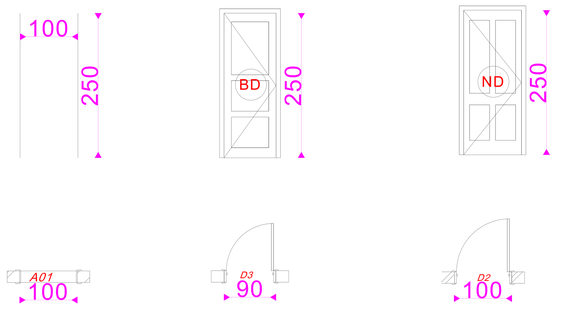

(A01)-ELEVATION

DOOR (D3)-ELEVATION

DOOR (D2)ELEVATION

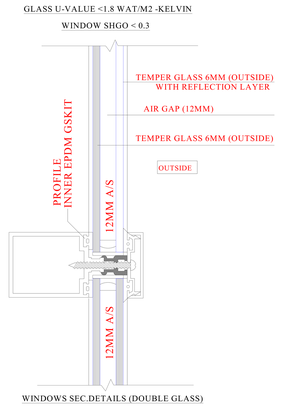

WINDOWS SEC.DETAILS (DOUBLE GLASS)

ALL GLASS MUST BE DOUBLE UNITES

GLASS SPECIFICATION:-

U-value (w/m2.k)<_ 1.8

SHADING CO- EFFICIENT (SC) <0.3

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	Opening Details		
Area	AWAFI	Floortype	
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	
Date	OCT-2024	Sht. No.	A13
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

OPENNING DETAILS

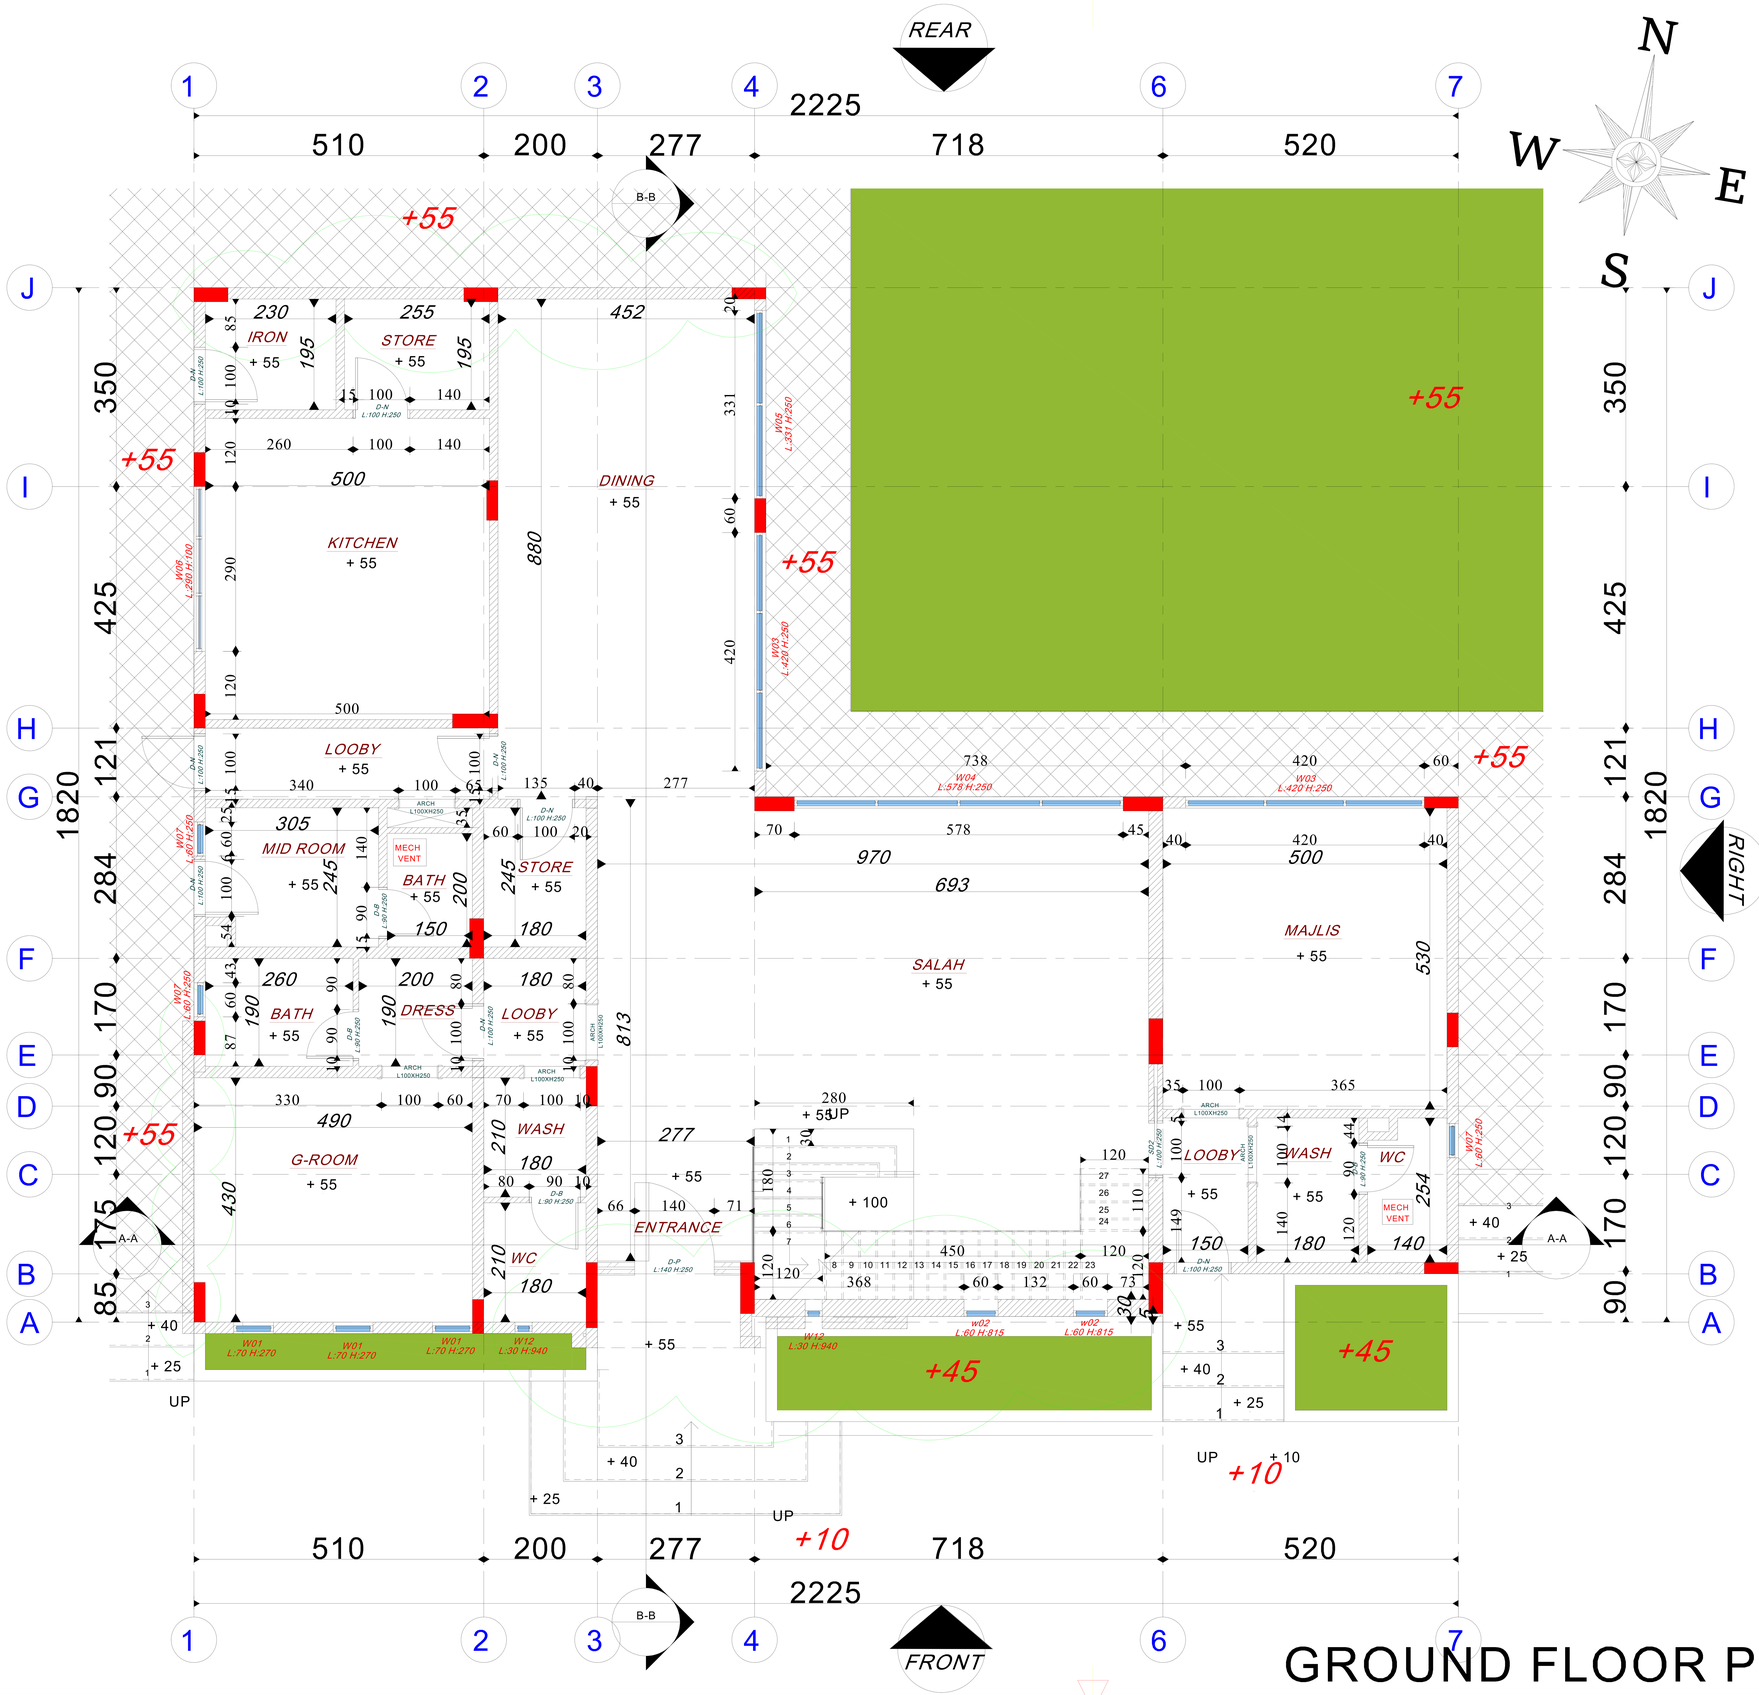

FINISHING FOR VERANDAH		FINISHING FOR BATH,WC & WASH AREA	
		F2 W2 C2	
F3 W3 C3		S1 W1 C1	
FLOORING		WALLS	
F3 Marble Tiles	F2 Ceramic Tiles (Non Slippery)	W3 Epoxy paint.	W2 Ceramic tiles up to ceiling
	F1 Ceramic glazed tiles		W1 Acrylic emulsion paint
SKIRTING		CEILING	
S2 Marble tiles 10cm hight	S1 Ceramic Tiles. 10cm hight	C3 Epoxy paint.	C2 Oil Paint.
			C1 Acrylic emulsion paint

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Note :-

* Rcc Lintels Must Be Made On Top Of All Doors , Arches And Windows All Of Them Are At Least 0.20 m Thick.
* All Blocks Adjacent To All Doors , Arches And Windows Must Be A Solid Block .

Rooms	Space	Number
Residential	296	
Commercial		
Industrial		
Goverment		
Resident.-Comm.		
Total		

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	GROUND FLOOR PLAN		
Area	AWAFI	Floortype	G
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	01
Date	OCT-25024	Sht. No.	A04
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

GROUND FLOOR PLAN

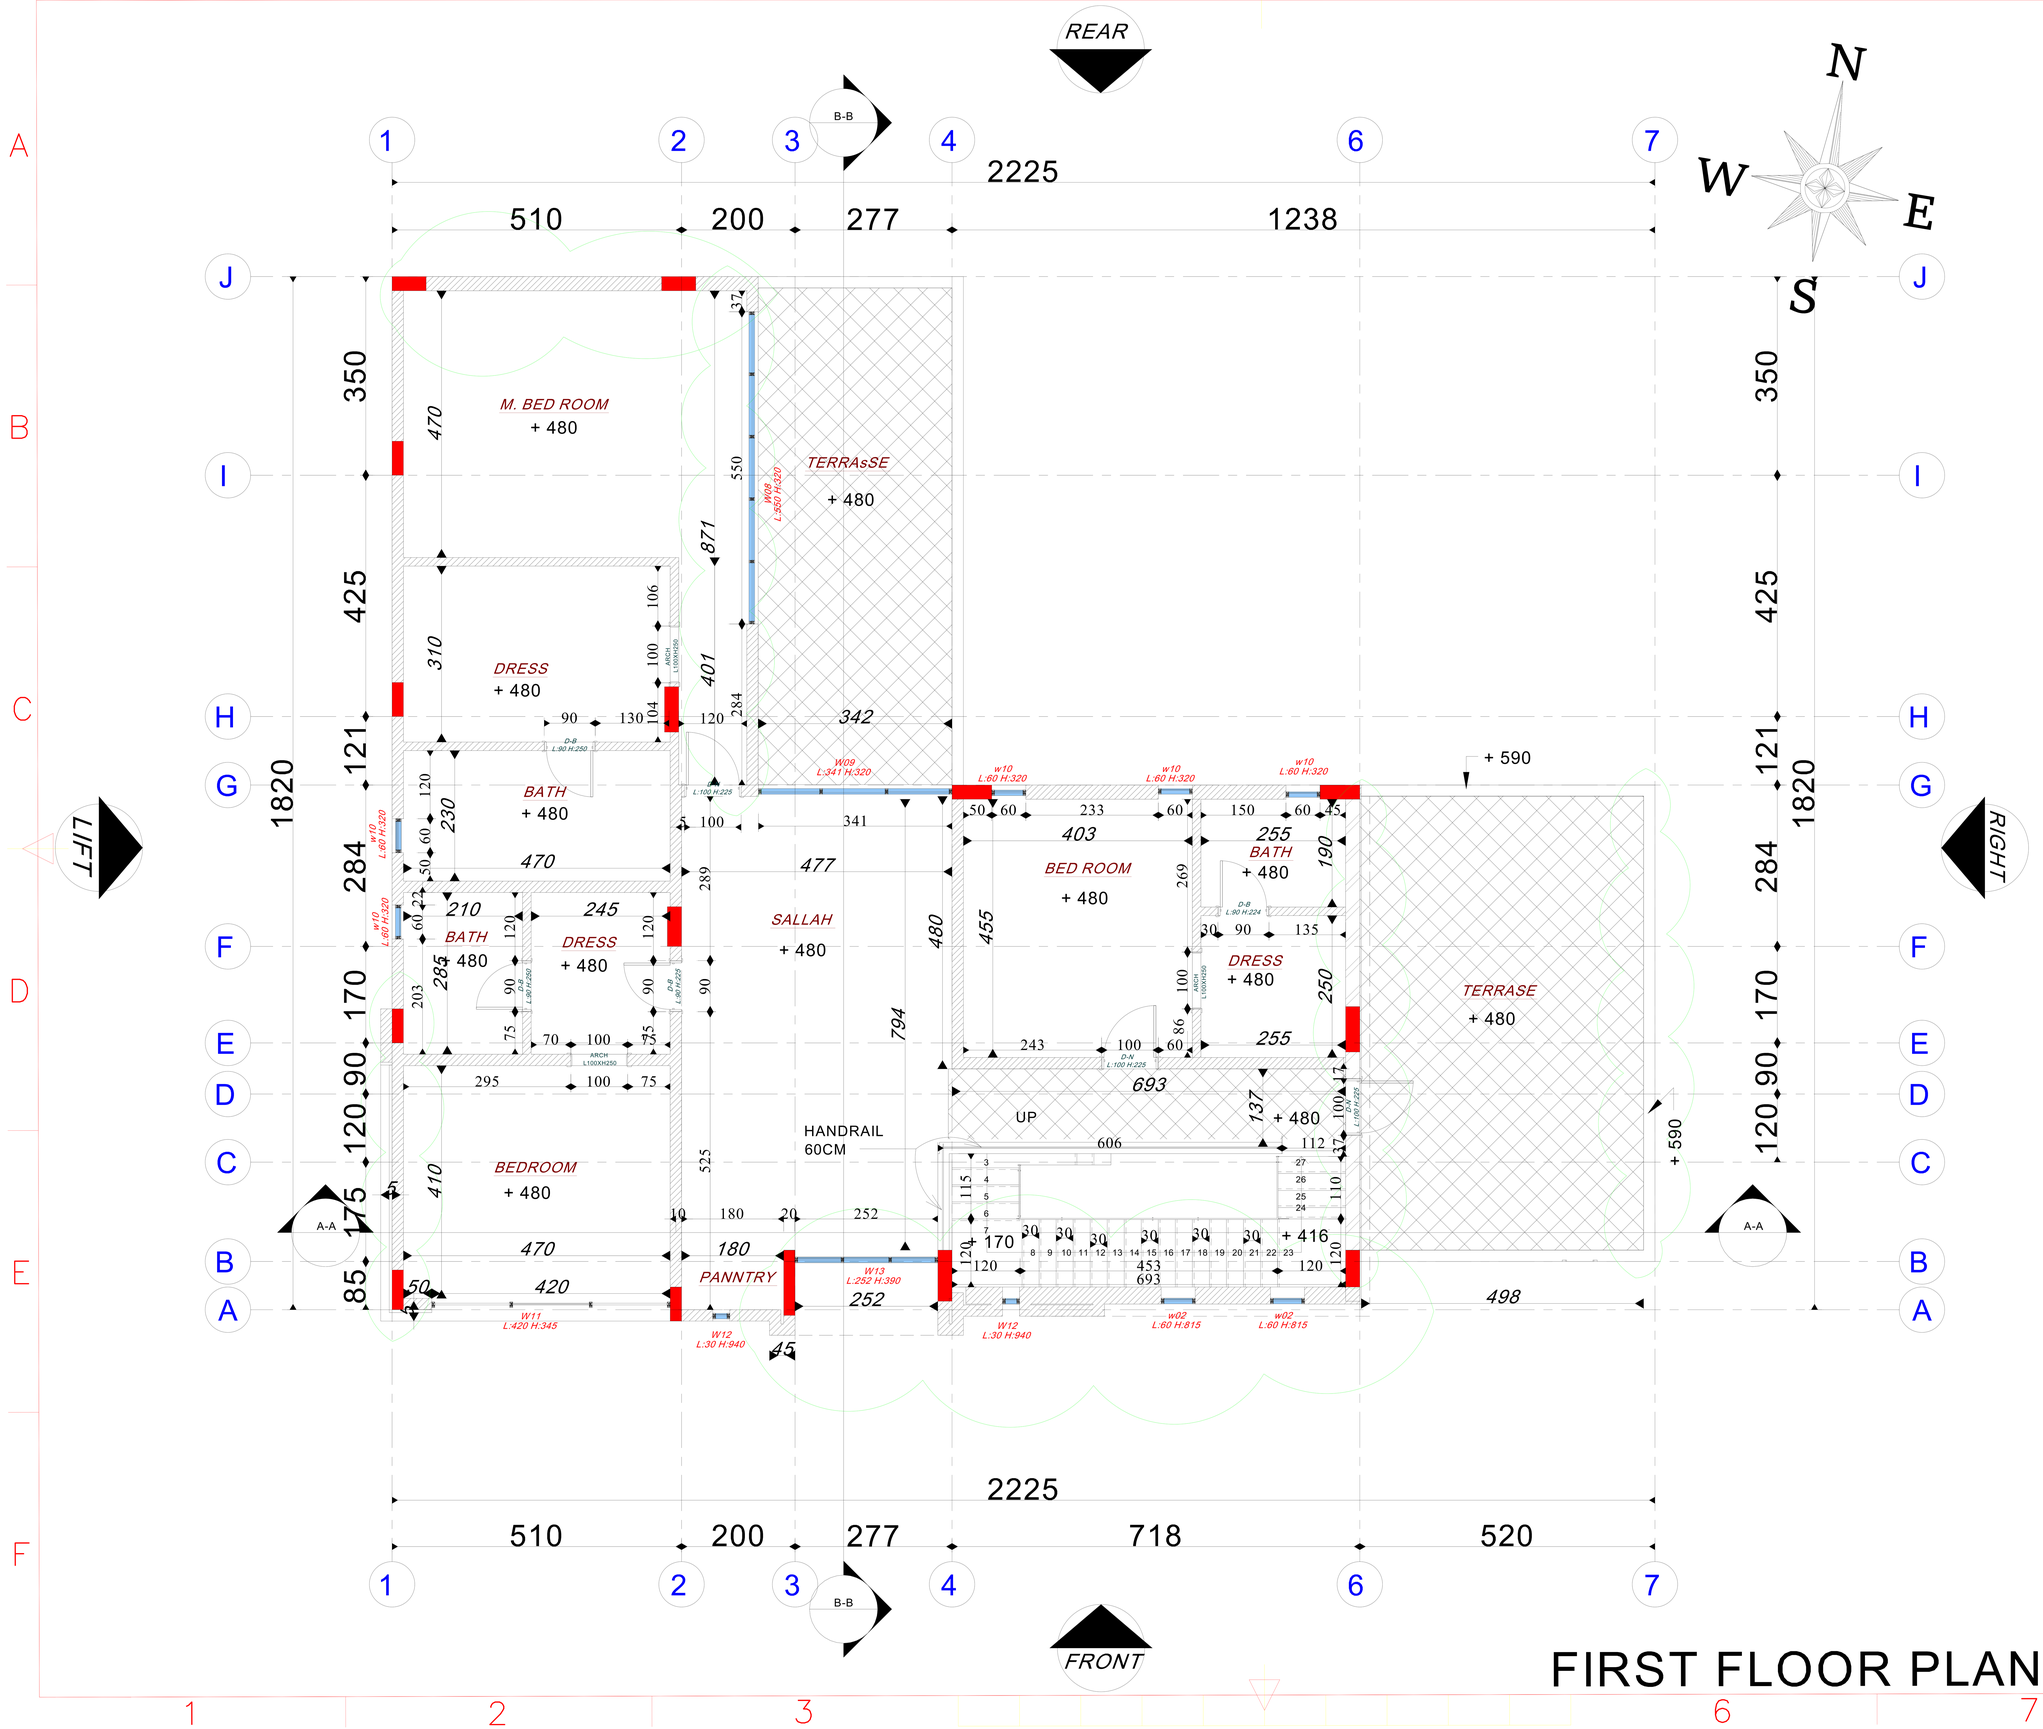

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائـرة البلـدية
إدارة المباني

Approved On — اعتمد في

31 October 2024

Building Permit #: PRMT-24-0004844

Appoved By:

Note :-

* Rcc Lintels Must Be Made On Top Of All Doors , Arches And Windows All Of Them Are At Least 0.20 m Thick.
* All Blocks Adjacent To All Doors , Arches And Windows Must Be A Solid Block .

Rooms	Space	Number
Residential	222	
Commercial		
Industrial		
Goverment		
Resident.-Comm.		
Total		

Savana
Engineering Consultancy & interior design

Client	KHALED ALI SAEED BEN SHUOOM AL SHEHHI		
Project	Proposed Double Storey Villa		
Drg.Title	FIRST FLOOR PLAN		
Area	AWAFI	Floortype	F
Case ID.	2673358	Draw. Type.	ARCH
Sec No.	1	Com. No.	
Block No.		Plot No.	406131922
Bldg. No.	BLD-24-04245	Floor No.	01
Date	OCT-2024	Sht. No.	A05A
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

FIRST FLOOR PLAN