عزيزي العميل،

يرجى مراجعة مركز سعاده العملاء للحصول على الترخيص

والمخططات المعتمدة. بيانات الطلب:

رقم الطلب	اسم نوع الطلب	الشركة المقدمة للطلب	رقم القسيمة	رقم الترخيص
2959252	Drawing Approval Request	سافانا ديزاين للإستشارات الهندسية و	208090106	PRMT-25-0003317

Dear Applicant

The permit of your case has been issued, Kindly contact the Customer Happiness Center to receive your permit and Approved drawings

Case details

Case ID	Case Type	Applicant Company Name	Parcel ID	Permit Number
2959252	Drawing Approval Request	سافانا ديزاين للإستشارات الهندسية و	208090106	PRMT-25-0003317

SCHEDULE OF FOOTINGS

TYPE	SIZE			REINFORCEMENT DETAILS				REMARKS.
				BOTTOM MESH		TOP MESH		
	WIDTH (MM)	LENGTH (MM)	DEPTH (MM)	SHORT BAR	LONG BAR	SHORT BAR	LONG BAR	
FNC	1000	1000	350	T12-150	T12-150	4T12	2T12	
FN1	600	1300	350	T12-150	T12-150	4T12	2T12	
FN2	800	1200	350	T12-150	T12-150	4T12	2T12	
F*	1400	1400	400	T12-150	T12-150	4T12	2T12	
F1	1400	1700	400	T12-150	T12-150	4T12	2T12	
F2	1800	2100	400	T12-100	T12-100	4T12	2T12	
F3	2000	2300	400	T12-100	T12-100	4T12	2T12	
F4	2500	2800	450	T16-150	T16-150	4T12	2T12	
F5	2800	3100	450	T16-100	T16-100	4T12	2T12	
F6	2300	2600	400	T16-150	T16-150	4T12	2T12	
CF1	2300	3600	450	T16-150	T16-150	T12-150	T12-150	
CF2	1900	4550	450	T14-150	T14-150	T12-150	T12-150	
CF3	2300	6870	500	T16-150	T16-150	T12-150	T12-150	
CF4	2000	5000	450	T16-150	T16-150	T12-150	T12-150	
CF5	3000	3050	450	T16-100	T16-100	T12-200	T12-200	
CF6	2600	4500	450	T16-150	T16-150	T12-150	T12-150	

SCHEDUEL FONDATION

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

11 August 2025

Building Permit #: PRMT-25-0003317

Appoved By:

Savana
Engineering Consultancy & interior design

Client	ADEL ALI ALSHEHHI		
Project	DOUBLE STORY VILLA		
Drg.Title	FOUNDATION SCHEDULE		
Area	SIEH AL URAIBI	Floortype	
Case ID.	2959252	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	208090106
Bldg. No.	BLD-25-02856	Floor No.	
Date	2025	Sht. No.	S03
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

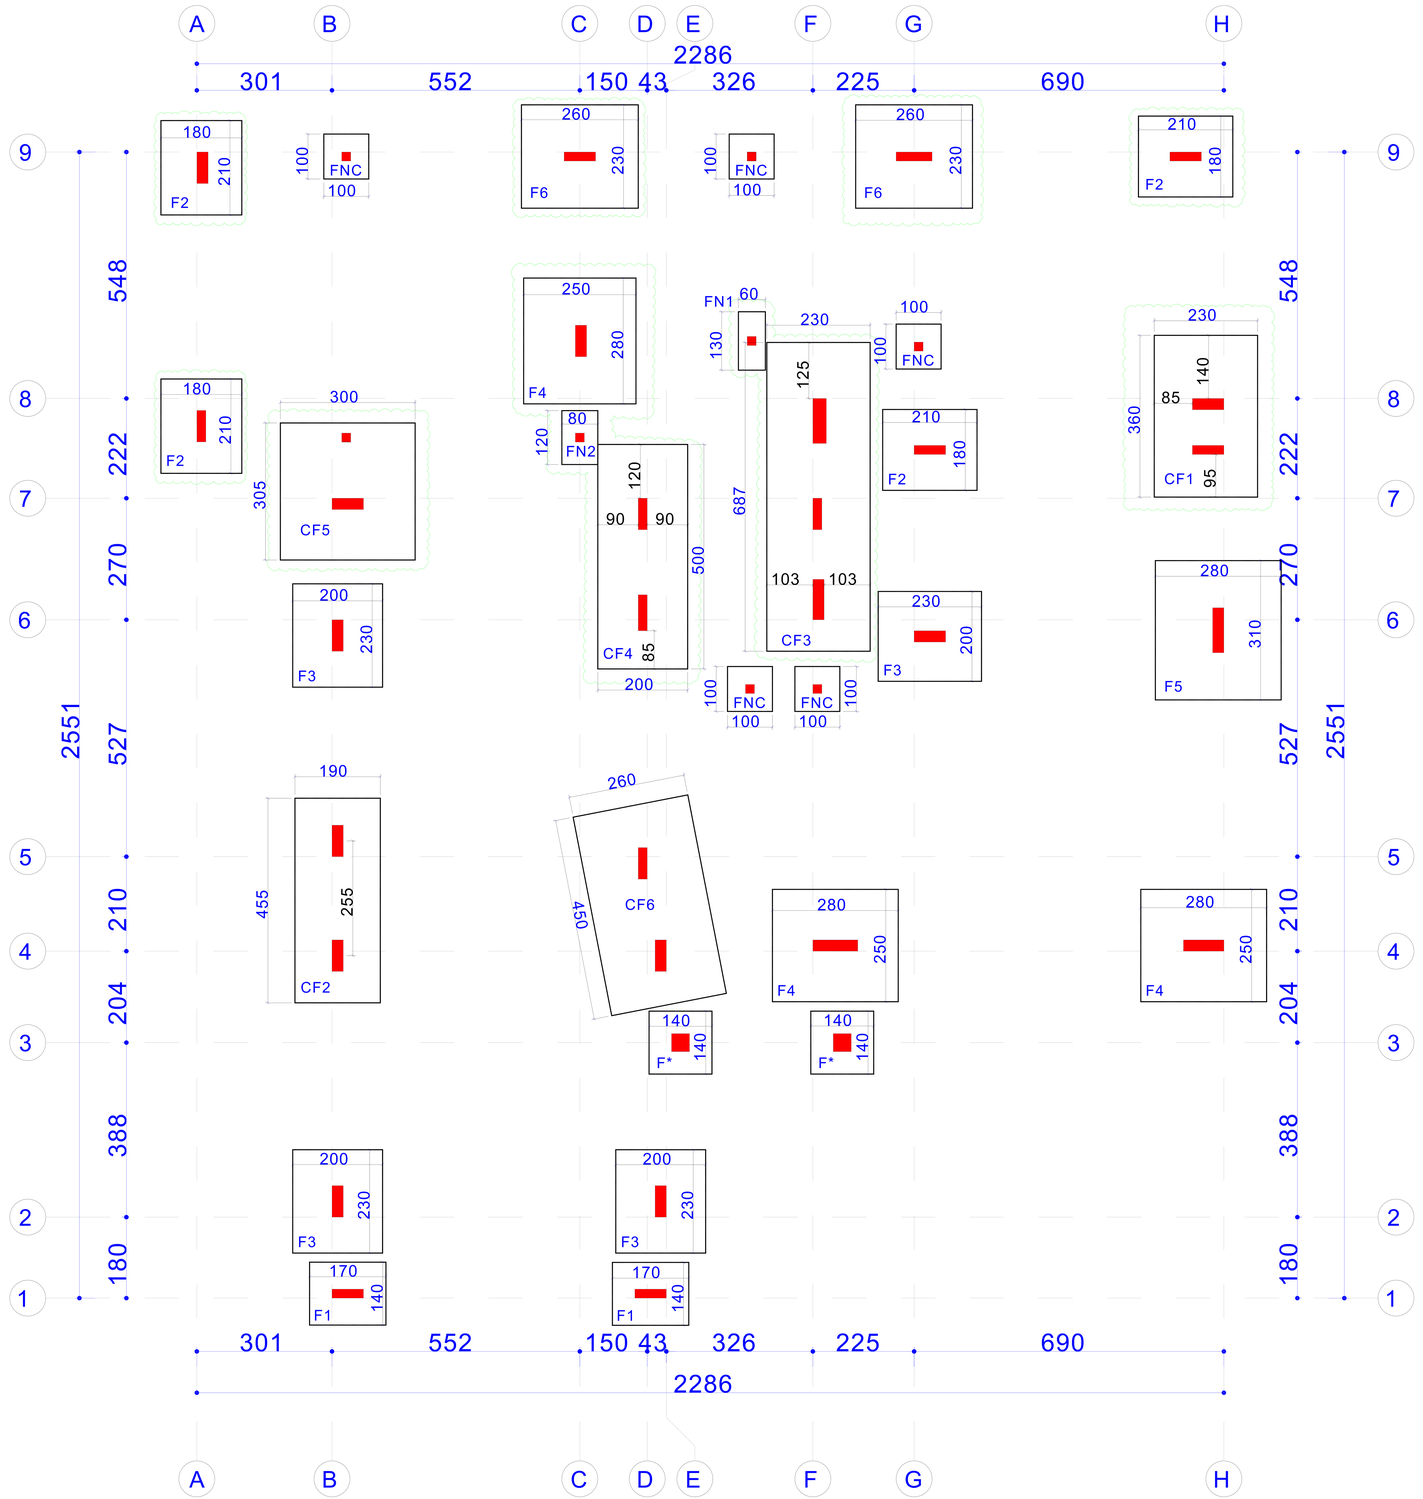

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

11 August 2025

Building Permit #: PRMT-25-0003317

Appoved By:

STRUCTURAL NOTES	CONCRETE COVERS :
ACI 318-11	Foundations cover = 75mm
F'C/FCU = 28/35 N/mm2	Columns cover = 40mm
FY = 460N/mm2	Walls cover = 30mm
FYt = 420N/mm2	Beams cover = 40mm
	Slabs & Stairs cover = 25mm

Savana
Engineering Consultancy & interior design

Client	ADEL ALI ALSHEHHI		
Project	DOUBLE STORY VILLA		
Drg.Title	FOUNDATION LAYOUT		
Area	SIEH AL URAIBI	Floortype	
Case ID.	2959252	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	208090106
Bldg. No.	BLD-25-02856	Floor No.	
Date	2025	Sht. No.	S02
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

FONDATION LAYOUT

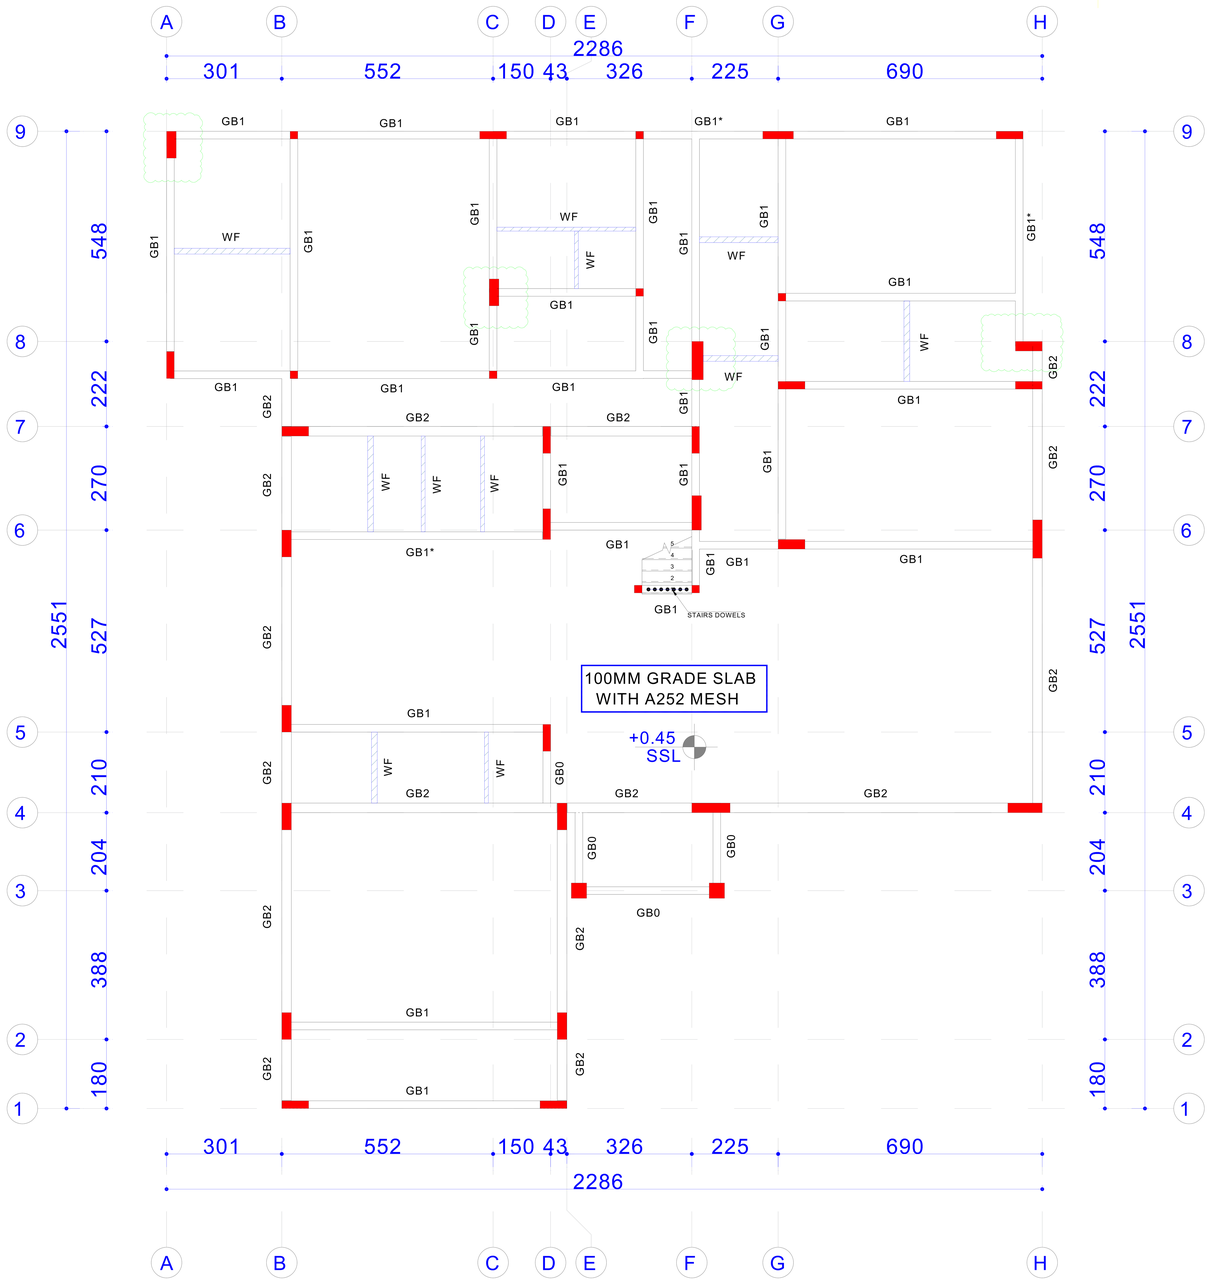

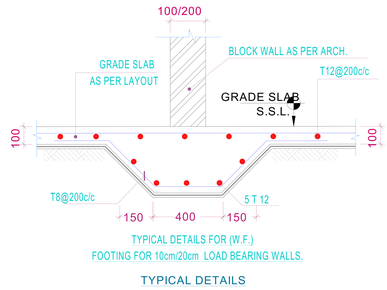

TYPICAL DETAILS

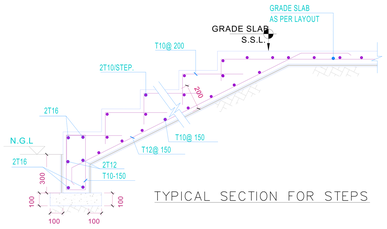

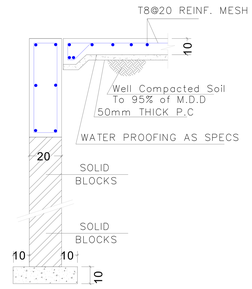

TYPICAL EXTERNAL GROUND BEAM
SC. (1/25)

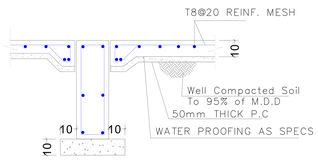

TYPICAL INTERNAL GROUND BEAM
SC. (1/25)

SCHEDULE OF GROUND BEAMS

TYPE	BEAM SIZE	BOTTOM REINFORCEMENT		TOP REINFORCEMENT			SIDE BARS	STIRRUPS		NO OF LEGS	REMARKS
	MM X MM	(A) STRAIGHT	(B) EXTRA AT MID SPAN	(C) STRAIGHT	(D) EXTRA AT SUPPORT	(E) EXTRA AT SUPPORT	(F) EACH SIDE	AT SUPPORT	AT MID SPAN		
GB0	200 X 500	3T14	———	3T14	———	———	1T12	T8-150	T8-200	2	
GB1	200 X 600	2T16	2T14	2T16	2T14	2T14	1T12	T8-150	T8-200	2	
GB1*	200 X 600	3T16	2T16	3T16	2T16	2T16	1T12	T8-150	T8-200	2	
GB2	250 X 700	3T16	3T16	3T16	2T16	2T16	2T12	T8-150	T8-200	2	

TIE BEAM LAYOUT

Govvernment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

11 August 2025

Building Permit #: PRMT-25-0003317

Appoved By:

STRUCTURAL NOTES

ACI 318-11

F'C/FCU = 28/35 N/mm2

FY = 460N/mm2

FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm

Columns cover = 40mm

Walls cover = 30mm

Beams cover = 40mm

Slabs & Stairs cover = 25mm

LEGEND:

1) COLUMN / WALL TO BE CONTINUED

2) COLUMN / WALL TO BE TERMINATED

Savana
Engineering Consultancy & interior design

Client	ADEL ALI ALSHEHHI		
Project	DOUBLE STORY VILLA		
Drg.Title	TIE BEAM LAYOUT		
Area	SIEH AL URAIBI	Floortype	
Case ID.	2959252	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	208090106
Bldg. No.	BLD-25-02856	Floor No.	
Date	2025	Sht. No.	S04
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

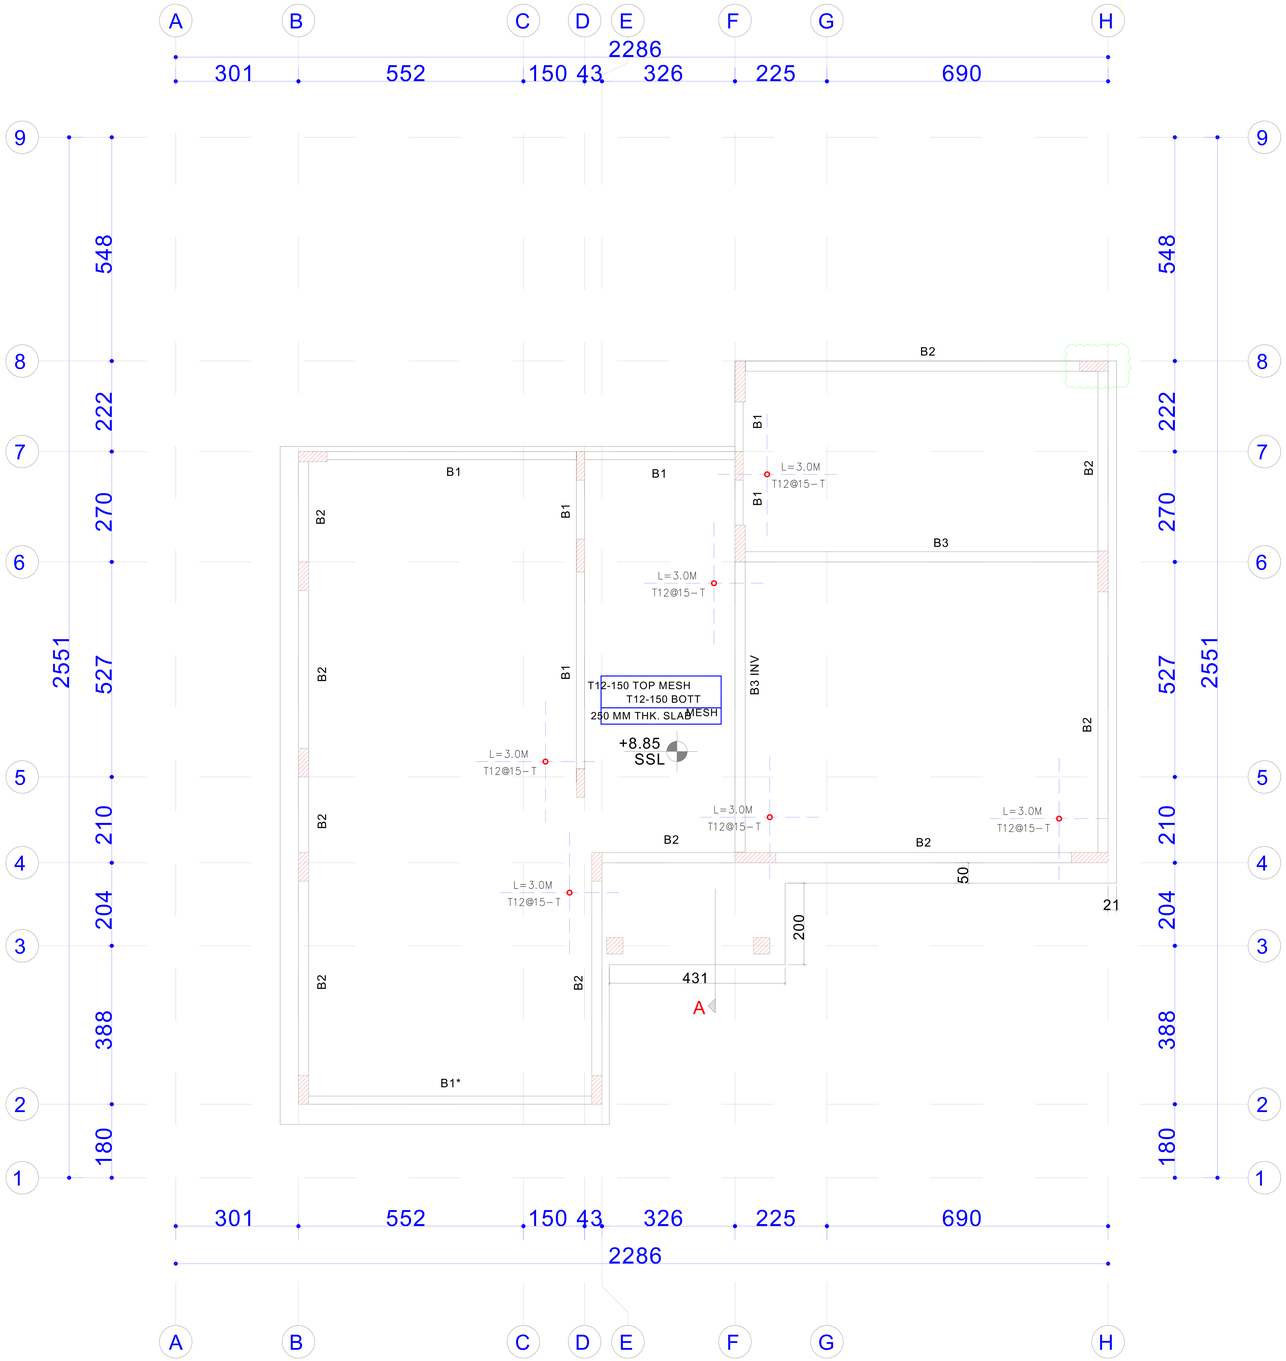

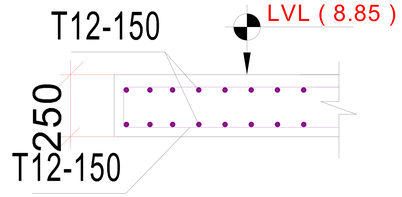

SEC (A-A)

LEGEND

SCHEDULE OF ADDL. REINF

TOP REINF.

BOTTOM REINF.

TYPE	REINFORCEMENT
A	T12@150mm C/C
B	T14@150mm C/C

SCHEDULE OF G.F SLAB BEAMS

TYPE	BEAM SIZE	BOTTOM REINFORCEMENT		TOP REINFORCEMENT			SIDE BARS	STIRRUPS		NO OF LEGS	REMARKS
	MM X MM	(A) STRAIGHT	(B) EXTRA AT MID SPAN	(C) STRAIGHT	(D) EXTRA AT SUPPORT	(E) EXTRA AT SUPPORT	(F) EACH SIDE	AT SUPPORT	AT MID SPAN		
B1	200 X 800	3T16	2T16	3T16	2T16	2T16	2T12	T10-150	T10-200	2	
B1*	200 X 800	3T16	3T16	3T16	2T16	2T16	2T12	T10-150	T10-200	2	
B2	250 X 800	3T16	3T16	3T16	3T16	3T16	2T12	T10-100	T10-200	2	
B3	250 X 1000	8T16	2T16	6T16	3T16	3T16	2T12	T10-100	T10-200	2	
CB1	250 X 800	3T20	--------	3T20+3T20			2T12	T10-150	T10-200	2	

FIRST FLOOR SLAB-BEAMS

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائـرة البلـدية
إدارة المباني

Approved On — اعتمد في

11 August 2025

Building Permit #: PRMT-25-0003317

Appoved By:

LEGEND:

1) COLUMN / WALL TO BE CONTINUED

2) COLUMN / WALL TO BE TERMINATED

STRUCTURAL NOTES

ACI 318-11

F'C/FCU = 28/35 N/mm2

FY = 460N/mm2

FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm

Columns cover = 40mm

Walls cover = 30mm

Beams cover = 40mm

Slabs & Stairs cover = 25mm

Savana
Engineering Consultancy & Interior Design

Client	ADEL ALI ALSHEHHI		
Project	DOUBLE STORY VILLA		
Drg.Title	FIRST FLOOR SLAB-BEAMS		
Area	SIEH AL URAIBI	Floortype	
Case ID.	2959252	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	208090106
Bldg. No.	BLD-25-02856	Floor No.	
Date	2025	Sht. No.	S06
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

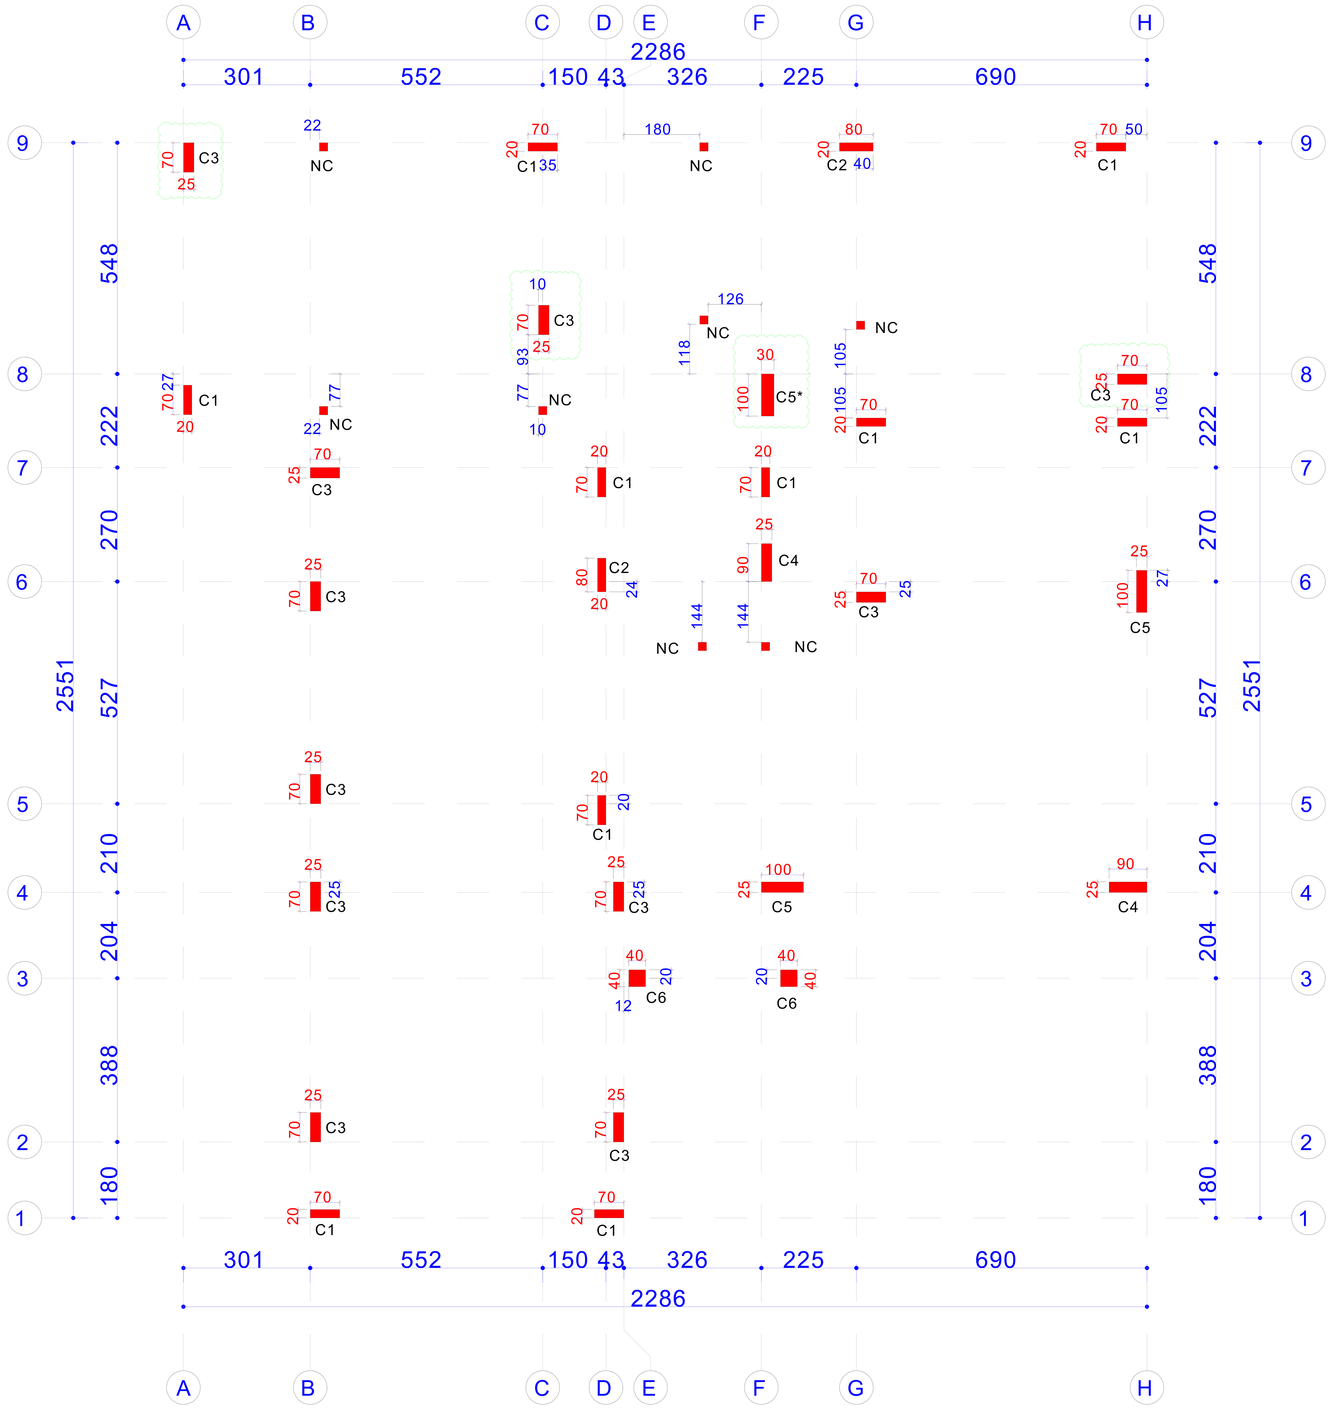

SCHEDULE OF COLUMNS

C1		MAIN BARS : 12T16 STIRRUPS : 2T10-150
C2		MAIN BARS : 14T16 STIRRUPS : 2T10-150
C3		MAIN BARS : 12T20 STIRRUPS : 2T10-150
C4		MAIN BARS : 16T20 STIRRUPS : 3T10-150
C5		MAIN BARS : 20T20 STIRRUPS : 3T10-150
C5*		MAIN BARS : 22T20 STIRRUPS : 3T10-150
C6		MAIN BARS : 12T16 STIRRUPS : 3T10-150
NC		MAIN BARS : 4T16 STIRRUPS : T10-150 UP TO GROUND FLOOR SSL LEVEL ONLY

links to be increased to T8 OR 10/100 within the top and bottom H/6 of the column height .

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

11 August 2025

Building Permit #: PRMT-25-0003317

Appoved By:

STRUCTURAL NOTES

ACI 318-11
F'C/FCU = 28/35 N/mm2
FY = 460N/mm2
FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm
Columns cover = 40mm
Walls cover = 30mm
Beams cover = 40mm
Slabs & Stairs cover = 25mm

Savana
Engineering Consultancy & Interior design

Client	ADEL ALI ALSHEHHI		
Project	DOUBLE STORY VILLA		
Drg.Title	FOUNDATION AND GROUND FLOOR COLUMN LAYOUT		
Area	SIEH AL URAIBI	Floortype	
Case ID.	2959252	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	208090106
Bldg. No.	BLD-25-02856	Floor No.	
Date	2025	Sht. No.	S10
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

FOUNDATION AND GROUND FLOOR COLUMN LAYOUT

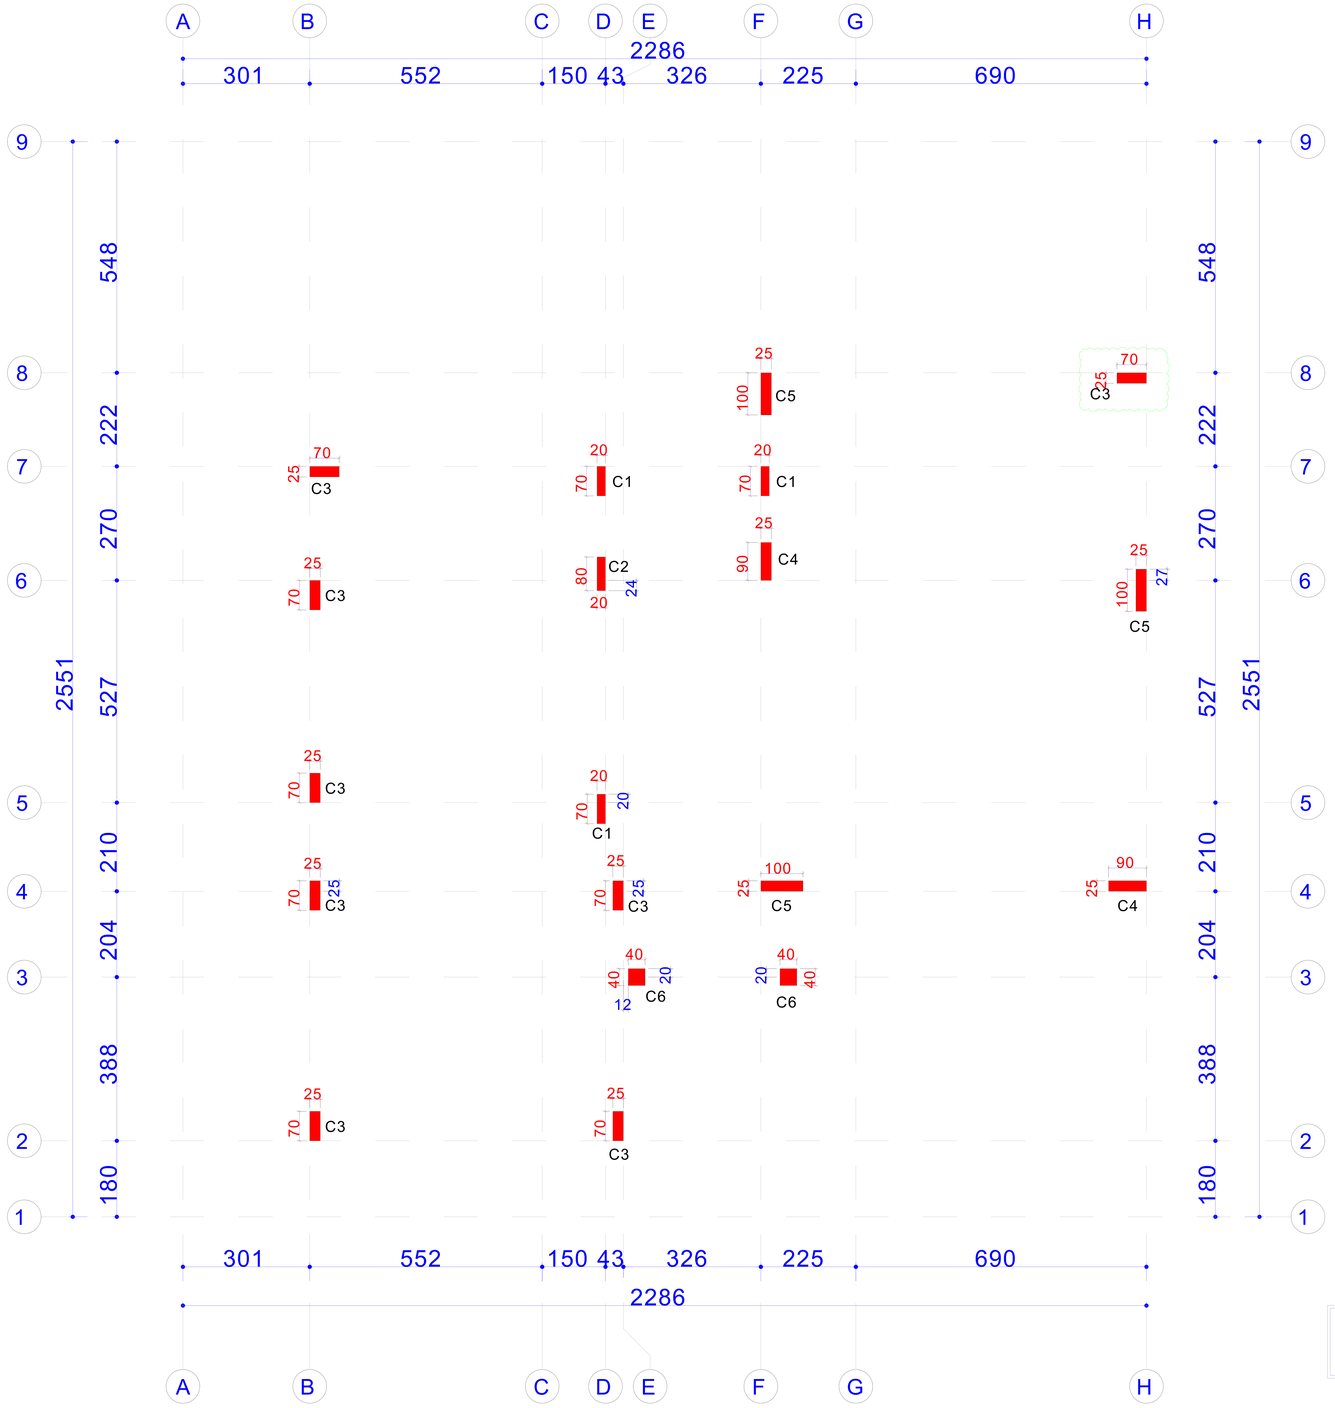

SCHEDULE OF COLUMNS

C1		MAIN BARS : 12T16 STIRRUPS : 2T10-150
C2		MAIN BARS : 14T16 STIRRUPS : 2T10-150
C3		MAIN BARS : 12T20 STIRRUPS : 2T10-150
C4		MAIN BARS : 16T20 STIRRUPS : 3T10-150
C5		MAIN BARS : 20T20 STIRRUPS : 3T10-150
C5*	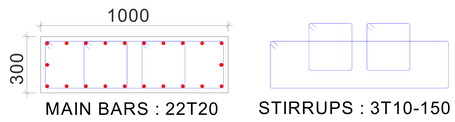	MAIN BARS : 22T20 STIRRUPS : 3T10-150
C6		MAIN BARS : 12T16 STIRRUPS : 3T10-150
NC		MAIN BARS : 4T16 STIRRUPS : T10-150

links to be increased to 18 OR 10/100 within the top and bottom H/6 of the column height .

UP TO GROUND FLOOR SSL LEVEL ONLY

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On — اعتمد في

11 August 2025

Building Permit #: PRMT-25-0003317

Appoved By:

STRUCTURAL NOTES

ACI 318-11
F'C/FCU = 28/35 N/mm2
FY = 460N/mm2
FYt = 420N/mm2

CONCRETE COVERS :

Foundations cover = 75mm
Columns cover = 40mm
Walls cover = 30mm
Beams cover = 40mm
Slabs & Stairs cover = 25mm

Savana
Engineering Consultancy & Interior design

Client	ADEL ALI ALSHEHHI		
Project	DOUBLE STORY VILLA		
Drg.Title	FIRST FLOOR COLUMN LAYOUT		
Area	SIEH AL URAIBI	Floortype	
Case ID.	2959252	Draw. Type.	STRC
Sec No.	1	Com. No.	
Block No.		Plot No.	208090106
Bldg. No.	BLD-25-02856	Floor No.	
Date	2025	Sht. No.	S11
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG IMEN

FIRST FLOOR COLUMN LAYOUT

Govemment Of Ras Al Khaimah
R.A.K. Municipality
Buildings Administration

حكومة رأس الخيمة
دائرة البلدية
إدارة المباني

Approved On
اعتمد في

12 August 2025

Building Permit #:
PRMT-25-0003317

Appoved By:

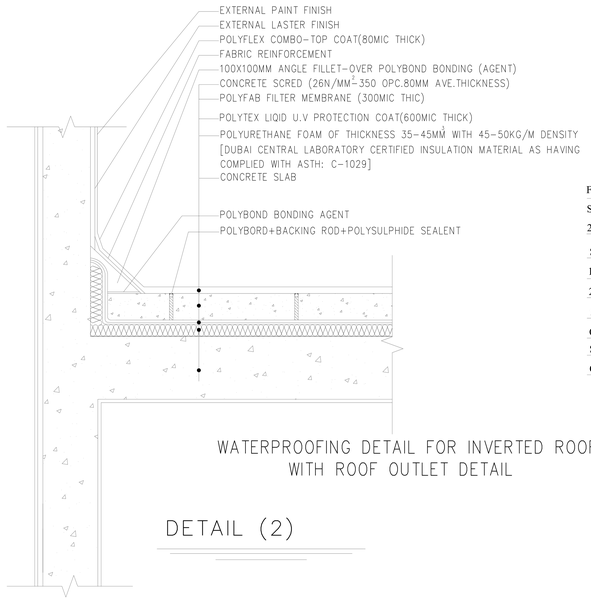

WATERPROOFING DETAIL FOR INVERTED ROOF
WITH ROOF OUTLET DETAIL

DETAIL (2)

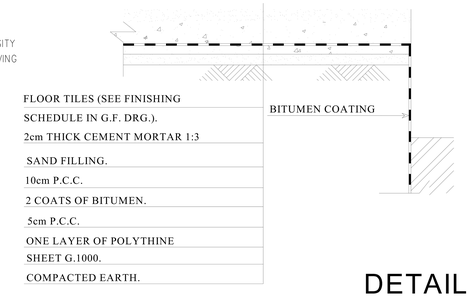

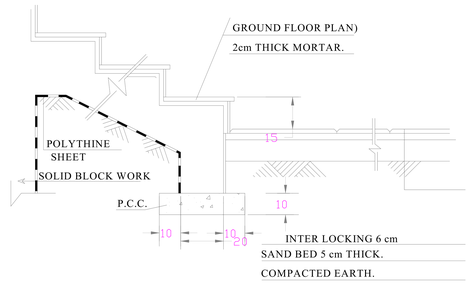

DETAIL (4)

ENTRANCE STEPS DETAIL

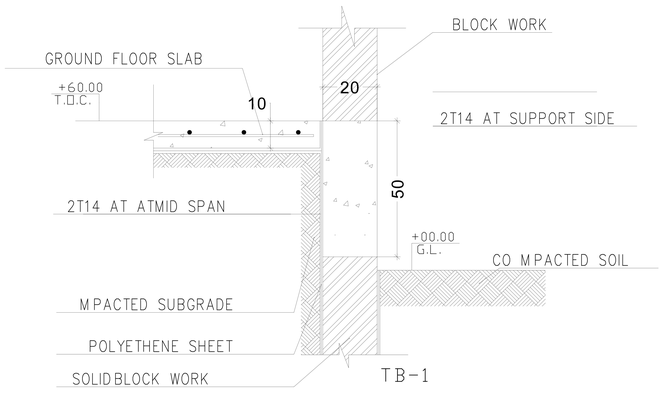

DETAIL (3)

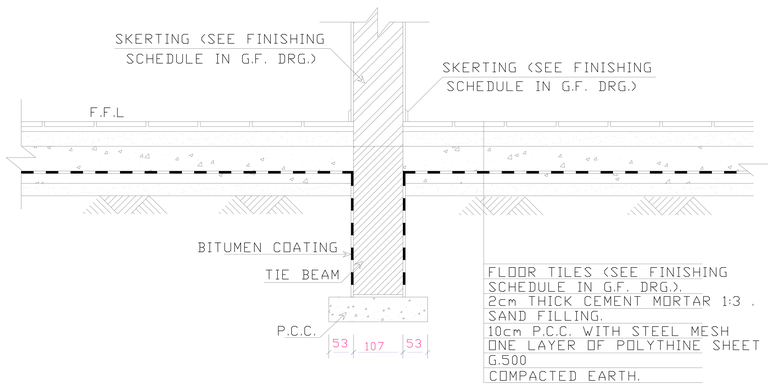

DETAIL (1)

GENERALE DETAILS

Savana
Engineering Consultancy & interior design

Client	ADEL ALI ASHEHHI		
Project	DOUBLE STORY VILLA		
Drg.Title	GENERALE DETAILS		
Area	SEIH AL URAIBI	Floortype	
Case ID.	2959252	Draw. Type.	ARCH
Sec No.	2	Com. No.	
Block No.		Plot No.	208090106
Bldg. No.	BLD-25-02856	Floor No.	
Date	2025	Sht. No.	A20
Scale	1/100	Job No.	

G.Manager	Architect	Designed By
ENG AYMEN	ENG IMEN	ENG OMAR